


Date	Fixture	Project	Quantity
------	---------	---------	----------

Del Wrap

Surface Wrap Around

Features

- LED surface wrap around fixture
- Curved prismatic diffuser
- Minimal maintenance
- Easy installation
- Minimal lamp image
- Dry and damp rated
- Designed and manufactured in North America
- 5 Year Warranty

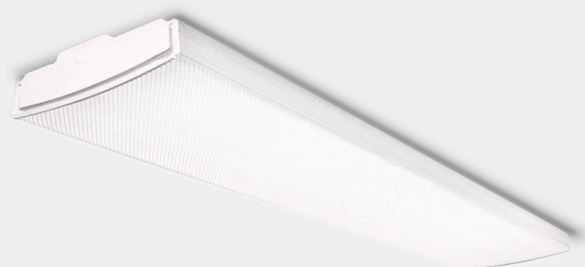

Specifications

Construction

Steel Housing

Dimensions

9.83"W x 2.56"H x 47.83"L

LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning
180,000+ Life Hours (L70)

Efficacy

Up to 153 Lm/W

Watts

20W, 30W, 40W, 60W

Color Temperature

3000K - 5000K

CRI

80 or 90

Voltage

120/277V or 347V

Operating Temperature

-40°C to +45°C | -40°F to +104°F

Lens

Prismatic

Mounting

Surface Mount

Accessories

Occupancy Sensor (on/off)
10kV Surge Protection

Wiring

Black or White Flexible Cord

Finishes

White - RAL 9003

Certifications

cULus



Ordering Guide

Sample Configuration: DEL WRAP - 30 - 80 - 4K - U - PR - WH - 10 - N



DEL WRAP					PR	WH	10		
Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Width	Accessories	

Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Width	Accessories
DEL WRAP	20 30 40 60	80 90	3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	U - 120/277V H - 347V	PR - Prismatic Lens	WH - White BLK - Black	10 - 10"	N - None <i>Optional</i> OCC - Occupancy Sensor (on/off) 10kV - 10kV Surge Protection

Dimensions



W: 9.827"
H: 2.566"

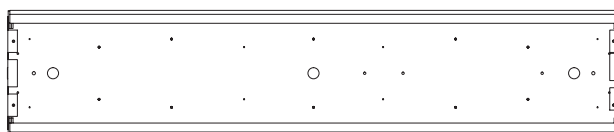

L: 47.826"

Output Performance

Model	Watts	Lm/W	Delivered Lumens
Del Wrap	20	152.6	3,052
	30	151.7	4,551
	40	150.7	6,028
	60	148.8	8,928