


Date	Fixture	Project	Quantity
------	---------	---------	----------

Del Snap 2.0

Metric Troffer

Features

- LED Metric Troffer fixture
- Steel construction
- Diffused acrylic lens
- Easy lay-in installation
- General ceiling light applications
- Dry and damp rated
- Designed and manufactured in North America
- 5 Year Warranty

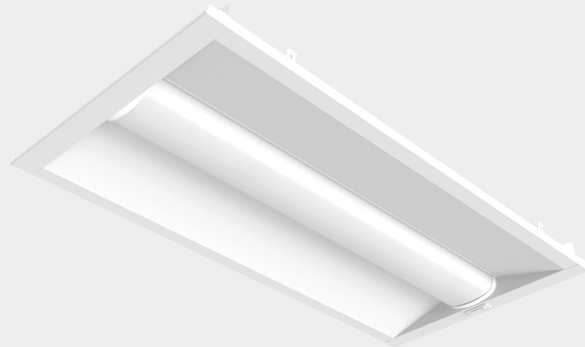

Specifications

Construction

Steel Body
Power Coated Finish

Dimensions: WxHxL

DS Metric 300x1200: 295mm x 106.4 mm x 1195 mm
 DS Metric 300x1500: 295mm x 106.4 mm x 1495 mm
 DS Metric 500x500: 495mm x 106.4 mm x 495 mm
 DS Metric 500x1200: 495mm x 106.4 mm x 1195 mm
 DS Metric 500x1500: 495mm x 106.4 mm x 1495 mm
 DS Metric 600x1500: 595mm x 106.4 mm x 1495 mm

LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning
 200,000+ Life Hours (L70)

Efficacy

130 Lm/W

Watts

DS Metric: 300x1200: 20W - 60W
 DS Metric: 300x1500: 20W - 60W
 DS Metric: 500x500: 20W - 30W
 DS Metric: 500x1200: 20W - 60W
 DS Metric: 500x1500: 20W - 60W
 DS Metric: 600x1500: 20W - 60W

Color Temperature

27000K - 5000K

CRI

80 or 90

Voltage

120/277V or 347V

Controls

0-10V Dimming down to 1%

Lens

Frosted

Mounting

T-Bar

Accessories

Occupancy Sensor (on/off)
 Bi-Level Dimming (100%/10%)
 10kV Surge Protection
 Photo Control
 Air Handling Slots

Wiring

Black or White Flexible Cord

Finishes

White - RAL 9003

Certifications

cULus



Ordering Guide

Sample Configuration: DEL SNAP METRIC 2.0 - 500x500 - 30 - 80 - 4K - U - FR - WH - TBAR - IN - N

DEL SNAP METRIC 2.0						FR	WH	TBAR	
Model	Size	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting	Wiring

Accessories

Model	Size	Watts	CRI	Color Temp	Voltage	Lens	Finish
DEL SNAP METRIC 2.0	300x1200	20, 25, 30, 35, 40, 50, 60	80	27K - 2700K	U - 120/277V H - 347V	FR - Frosted	WH - White
	300x1500	20, 25, 30, 35, 40, 50, 60	90	3K - 3000K			
	500x500	20, 25, 30		35K - 3500K			
	500x1200	20, 25, 30, 35, 40, 50, 60		4K - 4000K			
	500x1500	20, 25, 30, 35, 40, 50, 60		5K - 5000K			
	600x1200	20, 25, 30, 35, 40, 50, 60					

Mounting	Wiring	Accessories		
TBAR - T-Bar	IN - Internal <i>Optional</i> BFC - Black Flexible Cord WFC - White Flexible Cord	N - None <i>Optional</i> OCC - Occupancy Sensor (on/off) EM - Emergency Battery WIFI - Wi-Fi Dimming 10kV - 10kV Surge Protection AH - Air Handling Slots		

Note: For custom configurations please contact factory

Dimensions

Del Snap Metric 300x1200



W: 295mm
H: 106.4mm



L: 1195mm



Del Snap Metric 300x1500



W: 295mm
H: 106.4mm




L: 1495mm




Del Snap Metric 500x500



W: 495mm
H: 106.4mm



L: 495mm




Del Snap Metric 500x1200



W: 495mm
H: 106.4mm



L: 1195mm

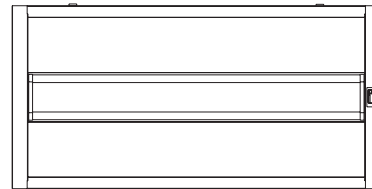


Del Snap Metric 500x1500



W: 495mm
H: 106.4mm



L: 1495mm

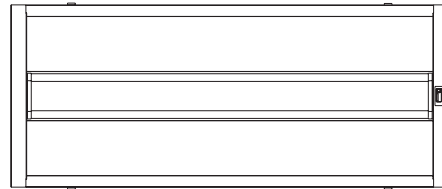


Del Snap Metric 600x1200



W: 595mm
H: 106.4mm



L: 1195mm

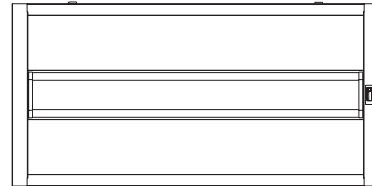

Photometrics

Intensity Summary - Candelas

Angle	0	22.5	45	67.5	90
0	1720	1720	1720	1720	1720
5	1683	1691	1710	1734	1752
10	1659	1669	1692	1718	1735
15	1620	1626	1652	1682	1700
20	1560	1563	1595	1627	1648
25	1484	1486	1524	1561	1583
30	1391	1395	1440	1484	1507
35	1289	1293	1346	1397	1423
40	1175	1181	1243	1301	1332
45	1051	1060	1132	1201	1233
50	992	937	1020	1101	1136
55	794	814	909	1002	1043
60	665	689	797	911	958
65	535	568	687	818	859
70	409	454	599	695	729
75	285	348	467	549	579
80	173	243	325	381	399
85	80	120	162	182	190
90	8	9	13	17	20

Polar Candela Distribution

