


Date	Fixture	Project	Quantity
------	---------	---------	----------

DTL Curve

Suspended

Features

- Architectural luminaire. Contemporary and minimal design
- Pendant mounting
- Direct, direct/indirect, indirect distribution options
- 3 widths with multiple lengths
- Continuous run option
- Multiple finishes
- Dry and damp rated for indoor applications
- Designed and Manufactured in North America
- 5 Year Warranty

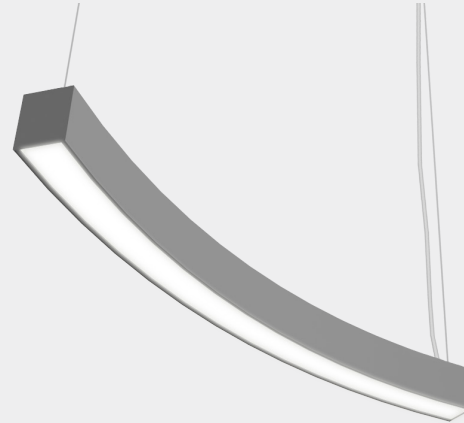

Specifications

Construction

Aluminum Extruded Body
Cast End Caps with Light Block
Powder Coated Finish

Dimensions

Width: 3.18"
Height: 4.125"
Length: 48"

LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning
4000K - 130 Lm/W
3500K - 98%
3000K - 95%
L90>70,000

Lumens/Ft - Direct/Indirect

Min: 250 Lm/ft - Max: 1200 Lm/ft

Color Temperature

2700K - 5000K

CRI

80 or 90

Voltage

120/277V or 347V

Driver

0-10V Dimming down to 1%, DALI, Lutron, Philips SR, ELDO

Driver

0-10V Dimming down to 1%, DALI, Lutron, Philips SR, ELDO

Control Options

Philips SNS 300, Encelium CLM, LG Dongle, Bluetooth Mesh, Enlighted Integral

Lens

Frosted Flat (direct/indirect)

Accessories

10kV Surge Protection, Generator Transfer Device, Emergency Battery,

Mounting

Aircraft Cable (10' std)

Note: For indirect distribution, mount at a minimum distance of 3ft from the ceiling

Wiring

5 Leads
5 Wire
6 Wire (emergency battery option only)

Finishes

Black - RAL 9004, Grey - RAL 7046, White - RAL 9003
Custom RAL finishes available

Certifications

cULus



Ordering Guide

Sample Configuration: DTL CRV - C - 8 - D 500 - D 500 - 80 - 4K - U - FR - WH - AC - DIMOFF - N - 2 - N - 5WIRE - CL - 6 - WH

DTL CRV								FR	
Model	Connection	CR	Direct Lm/Ft	Indirect Lm/Ft	CRI	Color Temp	Voltage	Lens	Finish
AC									
Mounting	Driver	Controls	Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Finish	


Model	Connection	CR - Continuous Run/Sections	Direct Lm/Ft	Indirect Lm/Ft	CRI
DTL CRV	C S	CR: _____ Continuous Run - Specify number of sections	D 250 (min) - D 1200 (max)	I 250 (min) - I 1200 (max)	80 90

Color Temp	Voltage	Lens	Finish	Mounting
27K - 2700K 3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	U - 120/277V H - 347V	FR - Frosted Flat (direct/indirect)	WH - White BLK - Black GRY - Grey CU - Custom* Note: For custom finishes please specify RAL number	AC - Aircraft Cable (10' std) Note: For indirect distribution, mount at a minimum distance of 3ft from the ceiling


Driver	Controls	Circuits	Accessories
DIMOFF - 0-10V Dimming down to 1% Optional DALI - Digital Addressable Lighting Interface LUTRON - Lutron Ecosystem SR - Philips SR ELDO - Dim to 0.11% ELDO (347 only 1-10 5%)	N - None Optional SNS - Philips SNS 300 w/BLD & Daylight CLM - Encelium CLM LG - LG Dongle BT - Bluetooth Mesh EN - Enlighted Integral	1 - 1 Circuit 2 - 2 Circuit (direct/indirect)	N - None Optional 10kV - 10kV Surge Protection EM - Emergency Battery (5 or 6 Wire)* +GTD - Generator Transfer Device Note: EM - Emergency Battery, direct distribution only

Wiring	Wire Color	Wire Length	Canopy Finish
5 WIRE - 5 Wire Optional 6 WIRE - 6 Wire - Emergency Battery Option (black color only) N - 5 Leads	CL - Clear Optional B - Black W - White	Length _____ 6' Standard	WH - White BLK - Black CU - Custom* Note: Please contact factory for custom finishes

Dimensions




W: 3.18"
H: 4.125"

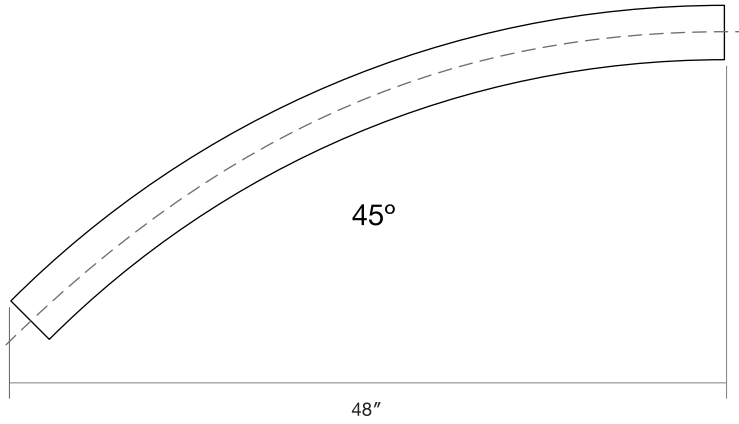


Note: End Cap Thickness=0.1".
Add additional two End Cap thickness of 0.2" to length

Distribution/Lens Options

Direct/Indirect Distribution




Lambertian
Direct: Frosted Flat
Lens



Lambertian
Indirect: Frosted Flat
Lens


Mounting



Ø 4.5"
Power Feed




Ø 2"
Non Power Feed




Aircraft Cable Canopy / Drywall Anchor

Connection Type




C-Connect




S-Connect


Sample Configurations




8x4' Section
Circle



4x4' Section
1/2 Circle



2x4' Section
1/4 Circle



4' Section
Linear Shapes

Finish Options

Standard Finishes



Signal White
RAL 9003

Telegrey 2
RAL 7046

Signal Black
RAL 9004

Custom Finishes



Traffic White
RAL 9016

Papyrus White
RAL 9018

Graphic Grey
RAL 7024

Jet Black
RAL 9005

Graphic Black
RAL 9011

Azure Blue
RAL 5009

Gentian Blue
RAL 5010

Sky Blue
RAL 5015



Pastel Orange
RAL 2003

Pure Orange
RAL 2004

Lemon Yellow
RAL 1012

Zinc Yellow
RAL 1018

Coral Red
RAL 3016

Rose
RAL 3017

Traffic Red
RAL 3020

Salmon Pink
RAL 3022



Olive Green
RAL 6003

Grass Green
RAL 6010

Claret Violet
RAL 4004

Traffic Purple
RAL 4006

Pearl Blackberry
RAL 4012

Beige
RAL 1001

Nut Brown
RAL 8011

Sepia Brown
RAL 8014

Please contact factory for additional and custom Finishes

Canopy Finishes



Signal White
RAL 9003

Telegrey 2
RAL 7046

Signal Black
RAL 9004