

Date	Fixture	Project	Quantity
------	---------	---------	----------

Troffer 1x4

Retrofit

Features

- LED troffer retrofit
- Aluminum body
- Easy installation
- Suitable for offices, corridors, classrooms, hallways, cafeterias, retail, and other general floor lighting applications
- Dry and damp rated
- Designed and Manufactured in North America
- 5 Year Warranty



Specifications

Construction

Aluminum Housing
Powder Coated Finish

Dimensions

6"W x 45.03"L

LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning
150,000+ Life Hours (L70)

Efficacy

153 Lm/W

Watts

15W, 20W, 30W, 40W, 60W

Color Temperature

3000K - 5000K

CRI

80 or 90

Voltage

120/277V or 347V

Controls

0-10V Dimming down to 1%

Operating Temperature

-40°C to +40°C | -40°F to +104°F

Mounting

Retrofit

Finishes

White - RAL 9003

Certifications

cULus



Ordering Guide


Sample Configuration: TRFT2 1x4 - 30 - 80 - 4K - U - WH - RT

TRFT2 1x4					WH	RT			
Model	Watts	CRI	Color Temp	Voltage	Finish	Mounting			

Model	Watts	CRI	Color Temp	Voltage	Finish	Mounting
TRFT2 1x4	15 20 30 40 60	80 90	3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	U - 120/277V* H - 347V Note: TRFT2 1x4 15 - 120/277V	WH - White	RT - Retrofit

Note: For custom configurations please contact factory.

Dimensions

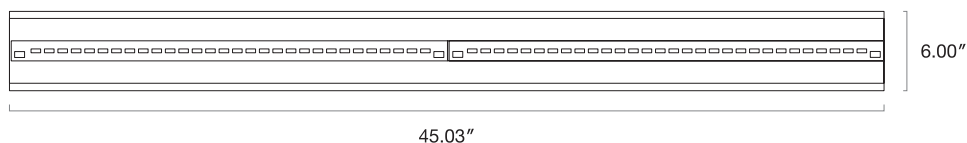

Output Performance

Model	Input Watt	Lm/W	Delivered Lumens
TRFT2 1x4 15*	13.9	153	2126.7
TRFT2 1x4 20	21.6	153	3304.8
TRFT2 1x4 30	30.9	153	4727.7
TRFT2 1x4 40	40.3	153	6165.9
TRFT2 1x4 60	60.1	153	9195.3

Note: TRFT2 1x4 15 - 120/277V