

Date	Fixture	Project	Quantity
------	---------	---------	----------

# Troffer 2x4

## Retrofit

### Features

- LED troffer retrofit
- Aluminum body
- Easy installation
- Suitable for offices, corridors, classrooms, hallways, cafeterias, retail, and other general floor lighting applications
- Dry and damp rated
- Designed and Manufactured in North America
- 5 Year Warranty



### Specifications

#### Construction

Aluminum Housing  
Powder Coated Finish

#### Dimensions

12"W x 45.03"L

#### LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning  
150,000+ Life Hours (L70)

#### Efficacy

153 Lm/W

#### Watts

30W, 40W, 60W, 80W, 120W

#### Color Temperature

3000K - 5000K

#### CRI

80 or 90

#### Voltage

120/277V or 347V

#### Controls

0-10V Dimming down to 1%

#### Operating Temperature

-40°C to +40°C | -40°F to +104°F

#### Mounting

Retrofit

#### Finishes

White - RAL 9003

#### Certifications

cULus

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).



## Ordering Guide


Sample Configuration: TRFT2 2x4 - 30 - 80 - 4K - U - WH - RT



Model	Watts	CRI	Color Temp	Voltage	Finish	Mounting	
TRFT2 2x4	30 40 60 80 120	80 90	3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	U - 120/277V H - 347V	WH - White	RT - Retrofit	

Note: For custom configurations please contact factory.

## Dimensions

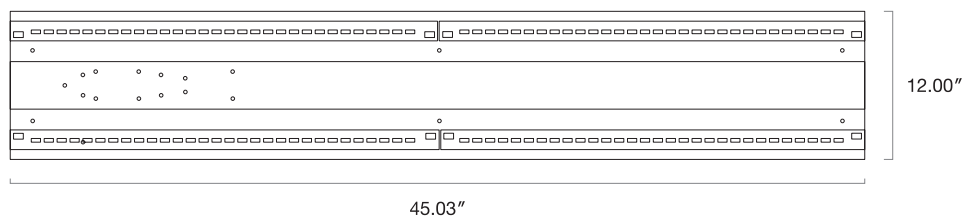

## Output Performance

Model	Watts	Lm/W	Delivered Lumens
TRFT2 2x4 30	27.9	153	4268.7
TRFT2 2x4 40	38.2	153	5844.6
TRFT2 2x2 60	57.6	153	8812.8
TRFT2 2x2 80	77.9	153	11918.7
TRFT2 2x2 120	120	153	18360