

Date	Fixture	Project	Quantity
------	---------	---------	----------

VT4L

Vapor Tight

Features

- Weatherproof LED fixture
- Enclosed and gasketed body protects electronics from harsh weather elements
- Polycarbonate shatterproof housing
- Moisture, vapor, chemical resistant, corrosion free, and dust protective
- NSF available
- Designed and Manufactured in North America
- 5 Year Warranty



Specifications

Construction

Polycarbonate, Shatterproof Housing
 Stainless Steel Latches
 IP 65 (Grey Body - Standard)
 IP 67 (White Body - Custom Order)

Dimensions

17.1"W x 50"L x 4.3"H

LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning
 200,000+ Life Hours (L70)

Efficacy

Up to 153 Lm/W

Watts

120W, 160W, 190W, 240W

Color Temperature

3000K - 5000K

CRI

80 or 90

Voltage

120/277V or 347/480V

Controls

0-10V Dimming down to 1%

Operating Temperature

-40°C to +40°C | -40°F to +104°F
 +55°C | +131°F (option)

Lens

Frosted or Clear

Mounting

Aircraft Cable
 V-Clips

Accessories

Occupancy Sensor (on/off)
 Waterproof Occupancy Sensor,
 Bi-Level Dimming
 Waterproof Bi-Level Dimming,
 10kV Surge Protection
 Emergency Battery

Wiring

Black or White Flexible Cord

Finishes

Grey
 White - Custom

Certifications

DLC Premium
 DLC
 cULus

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designights.org/qpl.



Ordering Guide

Sample Configuration: VT4L - 120 - 80 - 4K - U - CL - GRY - AC - BFC - N - IP65 - N


VT4L									
Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting	Wiring	Accessories
Enclosure	NSF								

Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting
VT4L	120 160 190 240	80 90	3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	U - 120/277V H - 347/480V	FR - Frosted CL - Clear	GRY - Grey <i>Optional</i> WH - White* Note: Custom order, consult factory	AC - Aircraft Cable V - V Hooks



Wiring	Accessories	Enclosure	NSF
BFC - Black Flexible Cord WFC - White Flexible Cord	N - None <i>Optional</i> OCC - Occupancy Sensor (on/off) BLD - Bi-Level Dimming (100%/10%) WBD - Waterproof Bi-Level Dimming (100%/10%) WOC - Waterproof Occupancy Sensor (on/off) 10kV - 10kV Surge Protection EM - Emergency Battery	IP65 - Standard (Grey Body) IP67 - White Body (Custom Order)	N - None NSF - White Body* Note: Custom order, consult factory

Note: For custom configurations please contact factory

Dimensions



W: 17.1"
H: 4.3"

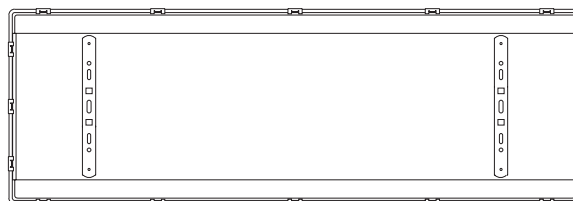

50.0"



Output Performance

Model	Watts	Lm/W	Delivered Lumens
VT4L 120	116.91	152.92	17761
VT4L 160	160.7	151.39	24328
VT4L 190	184.41	150.86	27820
VT4L 240	232.49	149.8	34830

Mounting Bracket (standard)



W: 1.625"
H: 1.625"



5.048"

