

Date	Fixture	Project	Quantity
------	---------	---------	----------

# Thinline DTL

## Recessed SPK

### Features

- Architectural luminaire
- Recessed with spackle flange
- Surface or wall mounting options
- 3 widths with multiple lengths
- Continuous run option
- Dry and damp rated for indoor applications
- Designed and Manufactured in North America
- 5 Year Warranty



### Specifications

#### Construction

Aluminum Extruded Body  
Powder Coated Finish

#### Dimensions

Widths: 2.25", 3.18", 4.5"  
Height: 4"

Lengths (single units): 2' - 8', available in 6" increments  
Continuous Run: Min 2', available in 6" increments  
(100' max for one power drop)

#### LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning  
4000K - 130 Lm/W  
3500K - 98%  
3000K - 95%  
L90>70,000

#### Lumens/Ft - Direct/Indirect

Min: 250 Lm/ft - Max: 1200 Lm/ft

#### Color Temperature

2700K - 5000K

#### CRI

80 or 90

#### Voltage

120/277V or 347V

#### Driver

0-10V Dimming down to 1%, DALI, Lutron, Philips SR, ELDO

#### Control Options

Philips SNS 300, Encelium CLM, LG Dongle, Bluetooth Mesh, Enlighted Integral

#### Lens

Frosted Flat (std), Frosted Regressed, Clear, Louver (w/ frosted regressed lens)

#### Accessories

10kV Surge Protection, Generator Transfer Device, Emergency Battery

#### Mounting

Ceiling  
Wall

#### Wiring

5 Leads  
5 Wire  
6 Wire (emergency battery option only)

#### Finishes

White - RAL 9003

#### Certifications

DLC  
cULus

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).



## Ordering Guide

Sample Configuration: DTL REC SPK - 3.18 - 8 - D500 - 80 - 4K - U - FR - WH - DIMOFF - N - N


<b>DTL REC SPK</b>								<b>WH</b>	
Model	Width	Length/CR	Direct Lm/Ft	CRI	Color Temp	Voltage	Lens	Finish	Mounting
Driver	Controls	Accessories							

Model	Width	Length/CR	Direct Lm/Ft	CRI	Color Temp	Voltage
<b>DTL REC SPK</b>	<b>2.25</b> <b>3.18</b> <b>4.5</b>	<b>2' - 8'</b> (single Units) Available in 6" increments <b>CR</b> - Continuous Run - Min 2', available in 6" increments - Specify Length	<b>D250</b> (min) - <b>D1200</b> (max)	<b>80</b> <b>90</b>	<b>27K</b> - 2700K <b>3K</b> - 3000K <b>35K</b> - 3500K <b>4K</b> - 4000K <b>5K</b> - 5000K	<b>U</b> - 120/277V <b>H</b> - 347V

Lens	Finish	Mounting	Driver
<b>FR</b> - Frosted Flat Optional <b>FFREG</b> - Frosted Regressed <b>ASY</b> - Asymmetric Clear <b>0.5 FRDRP</b> - 0.5" Frosted Drop Lens <b>1.5 FRDRP</b> - 1.5" Frosted Drop Lens* <b>LVR</b> - Louver (w/ frosted regressed lens)  Note: 1.5 Frosted Drop Lens for 2.25 and 3.18 model widths only	<b>WH</b> - White	<b>SU</b> - Surface <b>WM</b> - Wall Mount	<b>DIMOFF</b> - 0-10V Dimming down to 1% Optional <b>DALI</b> - Digital Addressable Lighting Interface <b>LUTRON</b> - Lutron Ecosystem <b>SR</b> - Philips SR <b>ELDO</b> - Dim to 0.11% ELDO (347 only 1-10 5%)

Controls	Accessories
<b>N</b> - None Optional <b>SNS</b> - Philips SNS 300 w/BLD & Daylight <b>CLM</b> - Encelium CLM <b>LG</b> - LG Dongle <b>BT</b> - Bluetooth Mesh <b>EN</b> - Enlighted Integral	<b>N</b> - None Optional <b>10kV</b> - 10kV Surge Protection <b>EM</b> - Emergency Battery (5 or 6 Wire)* <b>+GTD</b> - Generator Transfer Device  Note: <b>EM</b> - 2.25" & 3.18" models - min length 4', 4.5" model - min length 2'


### Dimensions

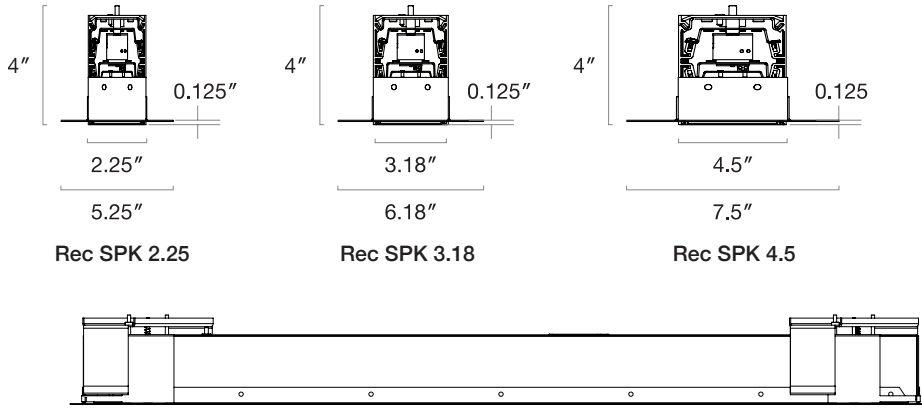

2': 27.2", 3': 39.2", 4': 51.2", 5': 63.2", 6': 75.2", 7': 87.2", 8': 99.2"

Note: Dimensions are for reference only. Please make measurements for actual dimensions

### Distribution/Lens Options

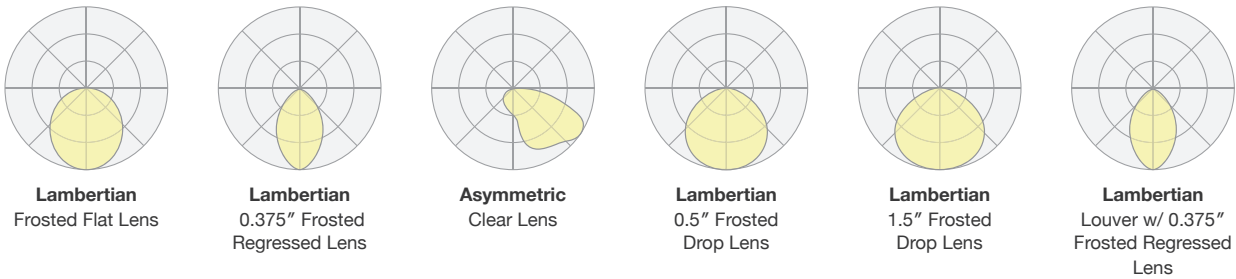

### Mounting

