

Date	Fixture	Project	Quantity
------	---------	---------	----------

Spotline

Wall Mount

Features

- Cylinder style luminaire
- Aluminum extruded body
- Wall mounting
- Direct, direct/indirect, indirect distribution options
- Tunable CCT option - 1800K to 6500K
- Multiple finishes
- Dry and damp rated for indoor applications
- Designed and Manufactured in North America
- 5 Year Warranty



Specifications

Construction

Aluminum Extruded Body
Powder Coated Finish

Dimensions

Diameter: 4.5"
Height: 12"

Watts/Lumens

26W / 2600 Lumens(max)

Distribution

Direct, Direct/Indirect, Indirect

Color Temperature

2700K - 5000K (Fixed)
1800K - 6500K (Tunable)

Note: Bluetooth LE commissioning with ERP tunable white app (IOS)

CRI

90

Voltage

120/277V

Driver

0-10V Dimming down to 1%
Triac

Note: Using Bianco TMW2 series light engine

Spot Reflector

Narrow - 20°
Medium - 30°
Wide - 50°

Mounting

Wall Mount Bracket

Wiring

5 Leads
5 Wire
6 Leads for Tunable Option

Finishes

Black - RAL 9004
Grey - RAL 7046
White - RAL 9003
Custom RAL finishes available

Certifications

cULus

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.



Ordering Guide


Sample Configuration: SPOTLINE - D - 90 - 12 - 90 - T - 4K- N - WH - WM - DIMOFF - 5 WIRE

SPOTLINE			12	90					WM
Model	Distribution	Watts/Spot	Size	CRI	Color Temp Tunable	Color Temp Fixed	Spot Reflector	Finish	Mounting
Driver	Wiring								


Model	Distribution	Watts/Spot	Size	CRI	Color Temp Tunable	Color Temp Fixed	Spot Reflector
SPOTLINE	D - Direct D/I - Direct/Indirect I - Indirect	26W 52W 26W	12	90	T - Tunable (18K-65K)	27K - 2700K 3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	N - Narrow 20° M - Medium 30° W - Wide 50°

Finish	Mounting	Driver	Wiring
WH - White BLK - Black GRY - Grey CU - Custom* Note: For custom finishes please specify RAL number	WM - Wall Mount	DIMOFF - 0-10V Dimming down to 1% TRIAC - Triac	5 WIRE - 5 Wire Optional 6 WIRE - 6 Wire* N - 5 Leads Note: 6 wires for Tunable option

Dimensions

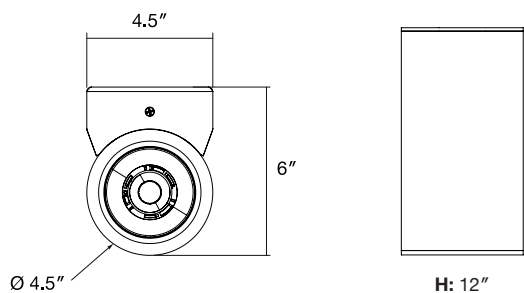

Mounting Options

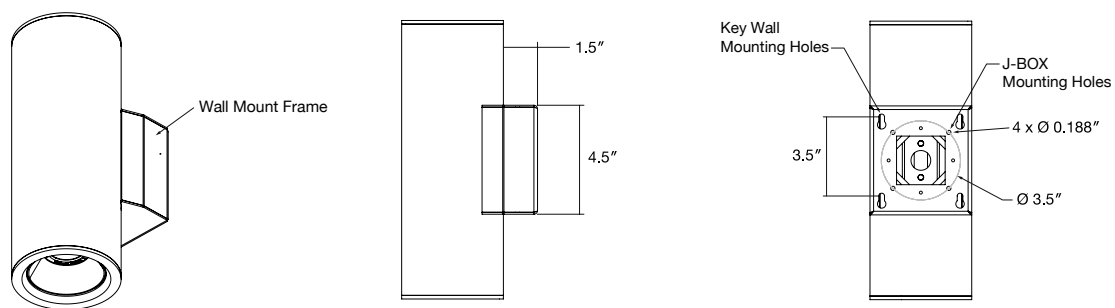

RAL Finish Options

Standard Finishes



Signal White
RAL 9003

Telegrey 2
RAL 7046

Signal Black
RAL 9004

Sample Custom Finishes



Traffic White
RAL 9016

Papyrus White
RAL 9018

Graphic Grey
RAL 7024

Jet Black
RAL 9005

Graphic Black
RAL 9011

Azure Blue
RAL 5009

Gentian Blue
RAL 5010

Sky Blue
RAL 5015



Pastel Orange
RAL 2003

Pure Orange
RAL 2004

Lemon Yellow
RAL 1012

Zinc Yellow
RAL 1018

Coral Red
RAL 3016

Rose
RAL 3017

Traffic Red
RAL 3020

Salmon Pink
RAL 3022



Olive Green
RAL 6003

Grass Green
RAL 6010

Claret Violet
RAL 4004

Traffic Purple
RAL 4006

Pearl Blackberry
RAL 4012

Beige
RAL 1001

Nut Brown
RAL 8011

Sepia Brown
RAL 8014



Additional RAL Finishes

Please Contact Factory