

Fixture: _____ QTY: _____ Project : _____


Thinline Spot Multiple

Suspended Direct

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Pendant mounting. Cast end caps with light block. Multiple spotlight positions. Spotlight driver 0-10V dimming. Universal 120/277 voltage. 4.5" wide. 2' - 8' Lengths. Dry and damp rated.

cULus Listed

Designed and manufactured in North America
5 Year Warranty

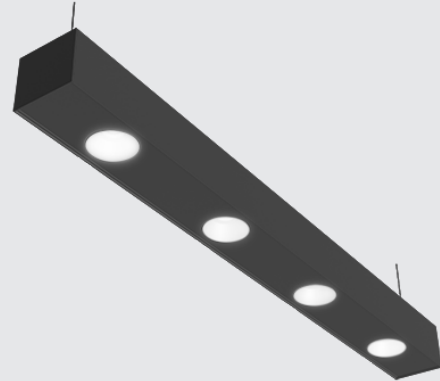

Performance

4000K - 166 Lm/W | 3500K - 165 Lm/W | 3000K - 161 Lm/W

Ordering Options

Sample Configuration: DTL MLT - 10W - 8 - 80 - 4K - M - WH - AC - DIMOFF - N - N - 5 WIRE - CL - 10 - WH

Model	Watts	Lengths - #Spots	CRI	Color Temp	Spot Reflector	Finish	Mounting
DTL MLT	10W	2' - 2 Spots	80	27K 2700K	N Narrow - 20°	WH White	AC Aircraft Cable 10' (Std)
		3' - 3 Spots	90	3K 3000K	M Medium - 30°	BLK Black	<i>Optional</i> TR Threaded Rod TB9/16 T-Bar 9/16 Clip TB15/16 T-Bar 15/16 Clip - For threaded rod, please specify length
	4' - 4 Spots		35K 3500K	W Wide - 50°	GRY Grey		
	5' - 5 Spots		4K 4000K		CU Custom		
	6' - 6 Spots		5K 5000K		- For custom finishes please specify RAL number		
	7' - 7 Spots				- See Finish Options		
	8' - 8 Spots						

DTL MLT

Driver	Controls	Accessories	Wiring	Wire Color
DIMOFF 0-10V DIMOFF	N None	N None	5 WIRE 5 Wire (Std)	CL Clear
<i>Optional</i>	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>
TRI Triac Dimming	SNS Philips SNS 300 w/BLD & Daylight	10kV 10kV Surge Protection	N 5 Leads	B Black
ELV Electronic Low Voltage	CLM Encelium CLM	+GTD Generator Transfer Device		W White
	LG LG Dongle			
	BT Bluetooth Mesh			
	EN Enlighted Integral			


Wire Length	Canopy Finish
Length(Ft) 6ft (std)	WH White BLK Black CU Custom
	- For custom finishes please specify RAL number - See Finish Options

Output Performance - Spotlight


Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 10	11.4	2700K	80	151	1,732
	11.4	3000K	80	161	1,840
	11.4	3500K	80	165	1,883
	11.4	4000K	80	166	1,894
	11.4	5000K	80	167	1,916

Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 15	16.3	2700K	80	151	2,474
	16.3	3000K	80	161	2,628
	16.3	3500K	80	165	2,690
	16.3	4000K	80	166	2,706
	16.3	5000K	80	167	2,737


Spot Beam

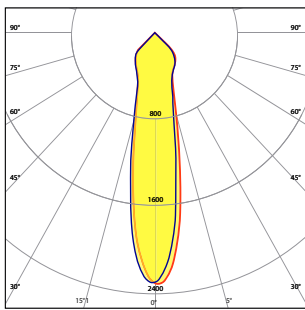

20° Spot Beam

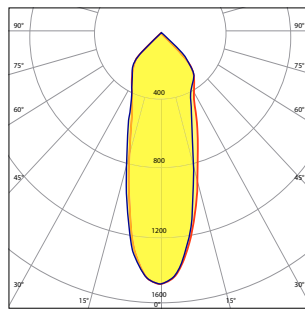


30° Medium Beam

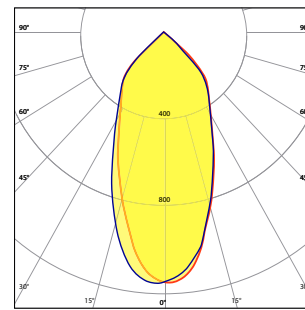


50° Wide Beam


Dimensions

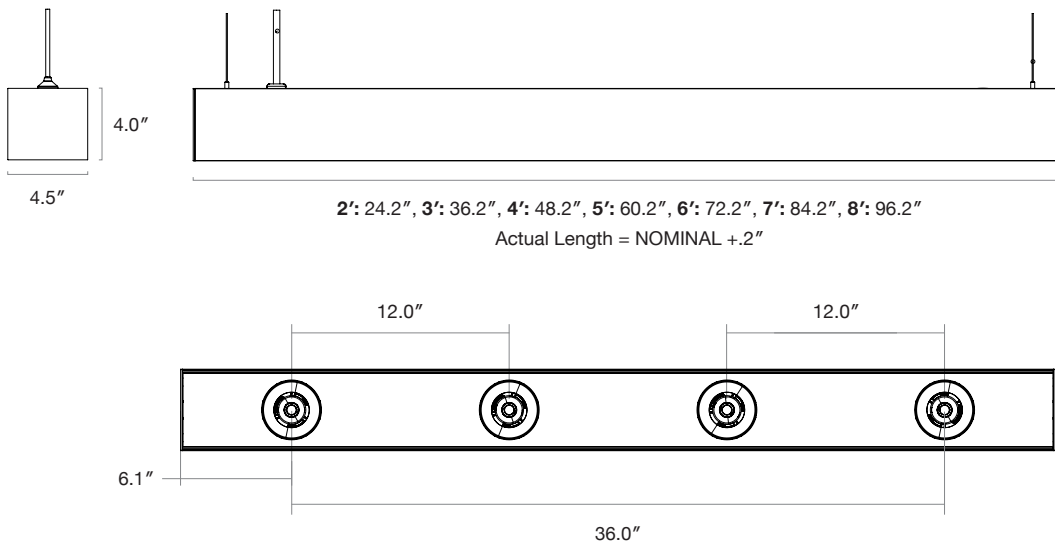

Mounting Options

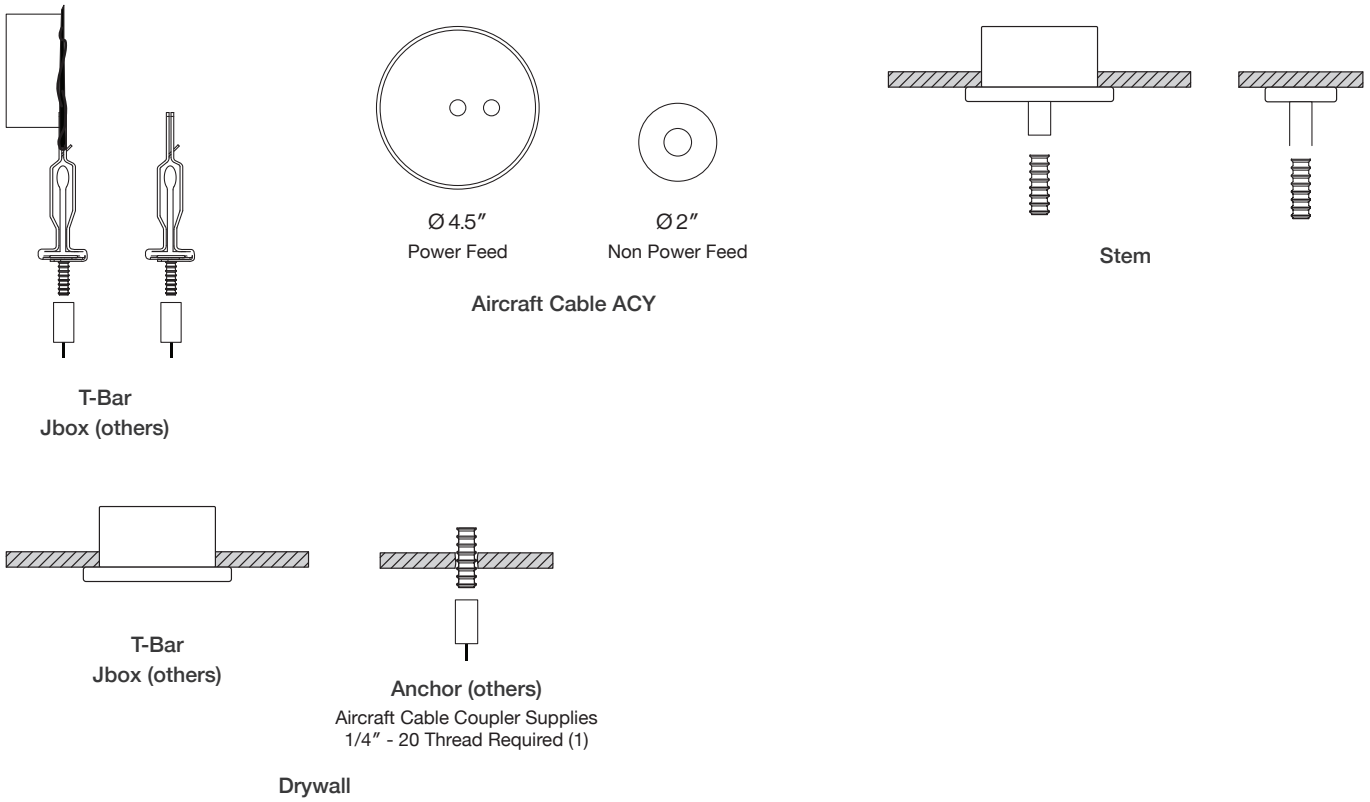


Mounting Locations

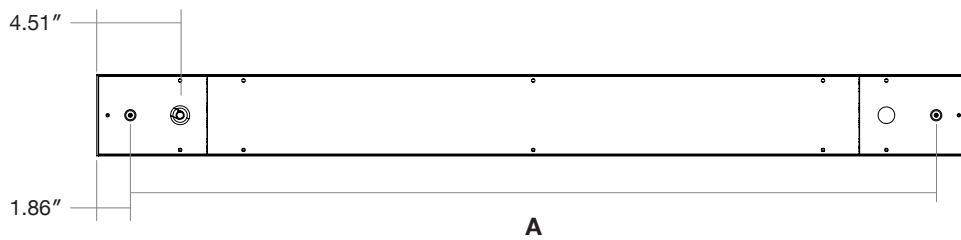

Model	Lengths - A
DTL 2	20.5"
DTL 3	32.5"
DTL 4	44.5"
DTL 5	56.5"
DTL 6	68.5"
DTL 7	80.5"
DTL 8	92.5"

Finish Options

Standard RAL Finishes



Signal White
RAL 9003




Telegrey 2
RAL 7046




Signal Black
RAL 9004


Sample Custom RAL Finishes




Traffic White
RAL 9016



Papyrus White
RAL 9018



Graphic Grey
RAL 7024



Light Grey
RAL 7035



Jet Black
RAL 9005



Graphic Black
RAL 9011



Azure Blue
RAL 5009



Gentian Blue
RAL 5010



Sky Blue
RAL 5015



Pastel Orange
RAL 2003




Pure Orange
RAL 2004




Daffodil Yellow
RAL 1007




Lemon Yellow
RAL 1012



Zinc Yellow
RAL 1018




Coral Red
RAL 3016



Rose
RAL 3017



Traffic Red
RAL 3020



Salmon Pink
RAL 3022



Olive Green
RAL 6003




Moss Green
RA 6005




Grass Green
RAL 6010




Claret Violet
RAL 4004




Traffic Purple
RAL 4006




Pearl Blackberry
RAL 4012




Beige
RAL 1001



Nut Brown
RAL 8011



Sepia Brown
RAL 8014



Mahogany Brown
RAL 8016

Custom Finishes - Please contact factory
Additional Finishes Available - Please contact factory