

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_

# Thinline Spot Multiple

## Surface Direct


Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Surface mounting. Cast end caps with light block. Multiple spot light positions. Spot light driver 0-10V dimming. Universal 120/277 voltage. 4.5" wide. 2' - 8' Lengths. Dry and damp rated.

cULus Listed

Designed and manufactured in North America  
5 Year Warranty

### Performance

4000K - 166 Lm/W | 3500K - 165 Lm/W | 3000K - 161 Lm/W

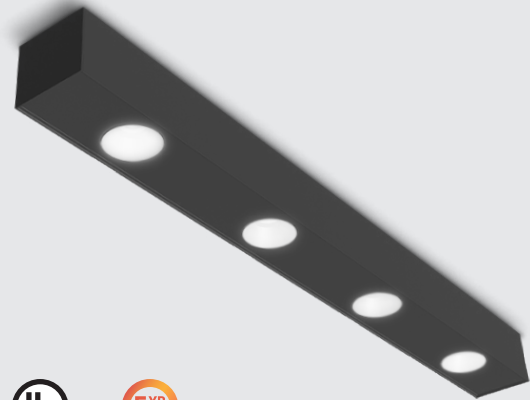

### Ordering Options

Sample Configuration: DTL MLT SU - 10W - 5 - 80 - 4K - M - BLK - SU - DIMOFF - N - N - N

Model	Watts	Lengths - #Spots	CRI	Color Temp	Spot Reflector	Finish	Mounting
DTL MLT SU	10W	2' - 2 Spots	80	27K 2700K	N Narrow - 20°	WH White	SU Surface
		3' - 3 Spots	90	3K 3000K	M Medium - 30°	BLK Black	
	4' - 4 Spots		35K 3500K	W Wide - 50°	GRY Grey		
	5' - 5 Spots		4K 4000K		CU Custom		
	6' - 6 Spots		5K 5000K				
	7' - 7 Spots						
	8' - 8 Spots						
						- For custom finishes please specify RAL number - See Finish Options	

DTL MLT SU         **SU**


Driver	Controls	Accessories	Wiring
<b>DIMOFF</b> 0-10V DIMOFF	<b>N</b> None	<b>N</b> None	<b>N</b> 5 Leads
<i>Optional</i>	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>
<b>TRI</b> Triac Dimming	<b>SNS</b> Philips SNS 300 w/BLD & Daylight	<b>10kV</b> 10kV Surge Protection	<b>5 WIRE</b> 5 Wire
<b>ELV</b> Electronic Low Voltage	<b>CLM</b> Encelium CLM	<b>+GTD</b> Generator Transfer Device	
	<b>LG</b> LG Dongle		
	<b>BT</b> Bluetooth Mesh		
	<b>EN</b> Enlighted Integral		

### Output Performance


Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 10	11.4	2700K	80	151	1,732
	11.4	3000K	80	161	1,840
	11.4	3500K	80	165	1,883
	11.4	4000K	80	166	1,894
	11.4	5000K	80	167	1,916

Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 15	16.3	2700K	80	151	2,474
	16.3	3000K	80	161	2,628
	16.3	3500K	80	165	2,690
	16.3	4000K	80	166	2,706
	16.3	5000K	80	167	2,737


### Spot Beam

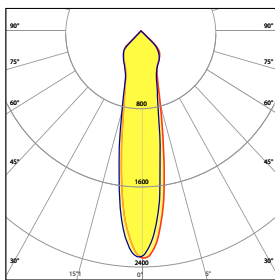

20° Spot Beam

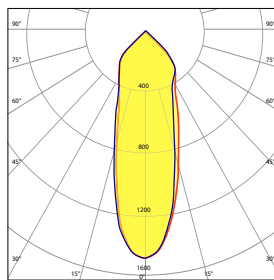


30° Medium Beam

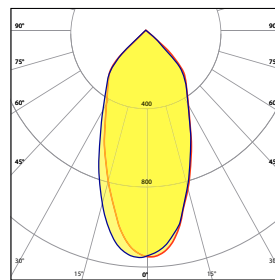


50° Wide Beam


### Dimensions

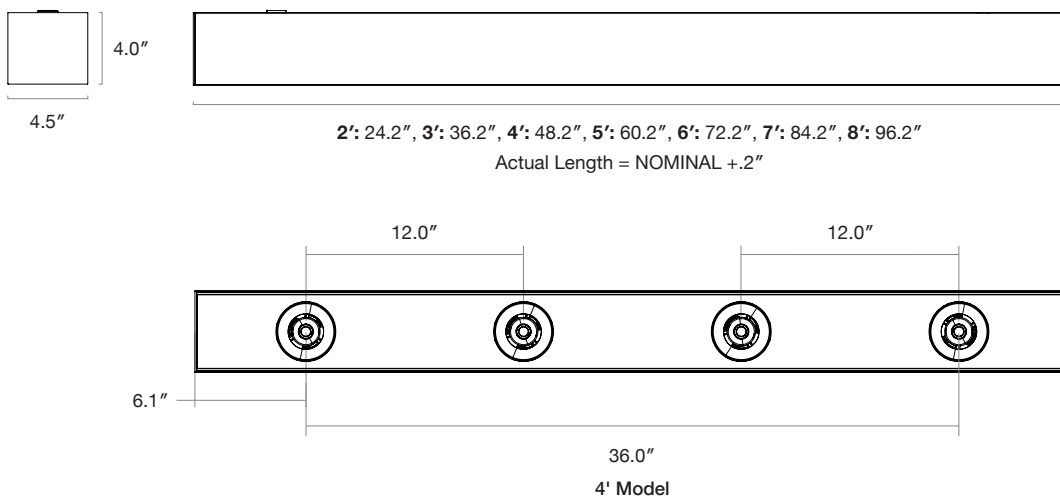

### Mounting

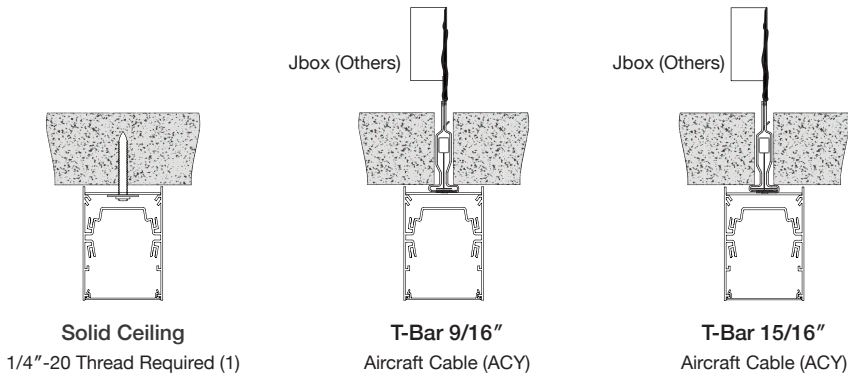


### Surface Mount Power Access

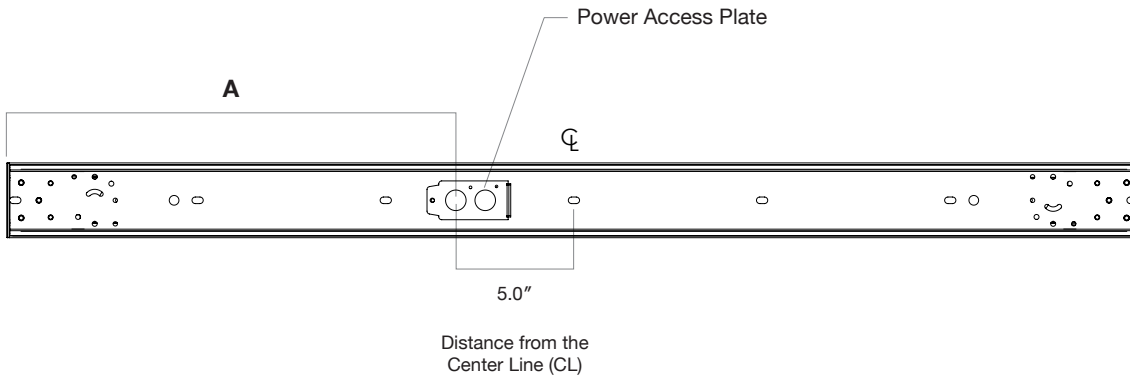

Model	Distance from End
DTL 2Ft	7.1"
DTL 3Ft	13.1"
DTL 4Ft	19.1"
DTL 5Ft	25.1"
DTL 6Ft	31.1"
DTL 7Ft	37.1"
DTL 8Ft	43.1"

## Finish Options

### Standard RAL Finishes



**Signal White**  
RAL 9003




**Telegrey 2**  
RAL 7046




**Signal Black**  
RAL 9004


### Sample Custom RAL Finishes




**Traffic White**  
RAL 9016



**Papyrus White**  
RAL 9018



**Graphic Grey**  
RAL 7024



**Light Grey**  
RAL 7035



**Jet Black**  
RAL 9005



**Graphic Black**  
RAL 9011




**Azure Blue**  
RAL 5009




**Gentian Blue**  
RAL 5010



**Sky Blue**  
RAL 5015



**Pastel Orange**  
RAL 2003



**Pure Orange**  
RAL 2004



**Daffodil Yellow**  
RAL 1007



**Lemon Yellow**  
RAL 1012



**Zinc Yellow**  
RAL 1018




**Coral Red**  
RAL 3016



**Rose**  
RAL 3017



**Traffic Red**  
RAL 3020



**Salmon Pink**  
RAL 3022



**Olive Green**  
RAL 6003



**Moss Green**  
RA 6005



**Grass Green**  
RAL 6010



**Claret Violet**  
RAL 4004



**Traffic Purple**  
RAL 4006



**Pearl Blackberry**  
RAL 4012



**Beige**  
RAL 1001



**Nut Brown**  
RAL 8011



**Sepia Brown**  
RAL 8014



**Mahogany Brown**  
RAL 8016

Custom Finishes - Please contact factory  
Additional Finishes Available - Please contact factory