


Fixture: _____ QTY: _____ Project : _____

Thinline Spot

Wall Mount Direct | Direct/Indirect

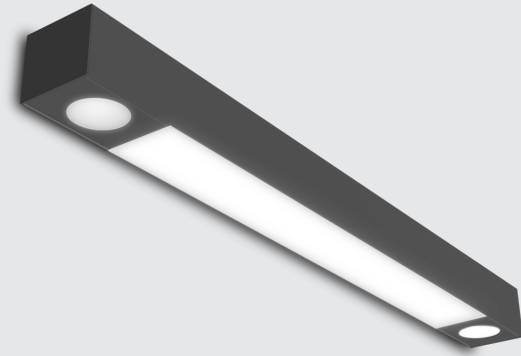

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Wall mounting. Direct, direct/indirect distributions. Cast end caps with light block. Multiple spot light positions. Spot light driver 0-10V dimming. Universal 120/277 voltage. 4.5" wide. 2' - 8' Lengths. Dry and damp rated.

cULus Listed

Designed and manufactured in North America
5 Year Warranty

Performance

4000K - 166 Lm/W | 3500K - 165 Lm/W | 3000K - 161 Lm/W



Ordering Options

Sample Configuration: DTL SPL WMD - 10W - SE - D250 - I250 - 80 - 4K - N - FR - FR - WH- WM - DIMOFF - N - 1 - N - 5WIRE

Model	Lengths (Ft)	Watts (Spot)	Spots (Position)	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp
DTL SPL WMD	2' - 8'	10W	SE Start, End	D 250	I 250	80	27K 2700K
DTL SPL SWMDI	(1' increments)	15W	SME Start, Middle, End	D 500	I 500	90	3K 3000K
				D 750	I 750		35K 3500K
				D 1000	I 1000		4K 4000K
				D _____ (custom up to 1200)	I _____ (custom up to 1200)		5K 5000K

WMD - Wall Mount Direct
WMDI - Wall Mount Dir-Ind

Note: - SME for
6' - 8' Lengths only

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

Spot Reflector	Direct Lens	Indirect Lens	Finish	Mounting	Driver - Linear
N Narrow - 20° M Medium - 30° W Wide - 50°	FR Frosted Flat	FR Frosted <i>Optional</i> ASY Asymmetric Clear BW Batwing	WH White BLK Black GRY Grey CU Custom - For custom finishes please specify RAL number - See Finish Options	WM Wall Mount <i>Optional</i> 12EX 12" Extended Arm	DIMOFF 0-10V DIMOFF <i>Optional</i> DALI Digital Addressable Lighting Interface LUTRON Lutron Ecosystem SR Philips SR ELDO .1% ELDO (347 only 1-10 5%)

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

Controls	Circuits	Accessories	Wiring
N None <i>Optional</i> DMX Digital Multiplex SNS Philips SNS 300w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral	1 1 Circuit 2 2 Circuits	N None <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device Note: - For Emergency Battery (EM), minimum length is 4' (direct distribution), 6' (indirect distribution)	5 WIRE 5 Wire (Std) <i>Optional</i> N 5 Leads 6 WIRE 6 Wire - Cable (EM - emergency battery option)

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----------------------	----------------------

LED

L90>70,000

Samsung 301 3-Step MacAdam Binning

4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%

Output Performance - Spotlight


Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 10	11.4	2700K	80	151	1,732
	11.4	3000K	80	161	1,840
	11.4	3500K	80	165	1,883
	11.4	4000K	80	166	1,894
	11.4	5000K	80	167	1,916
Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 15	16.3	2700K	80	151	2,474
	16.3	3000K	80	161	2,628
	16.3	3500K	80	165	2,690
	16.3	4000K	80	166	2,706
	16.3	5000K	80	167	2,737

Lens Options - Direct Distribution




Frosted Flat


Lens Options - Indirect Distribution



Standard
Frosted




Asymmetric




Batwing


Spot Beam



20° Spot Beam





30° Medium Beam




50° Wide Beam

Dimensions

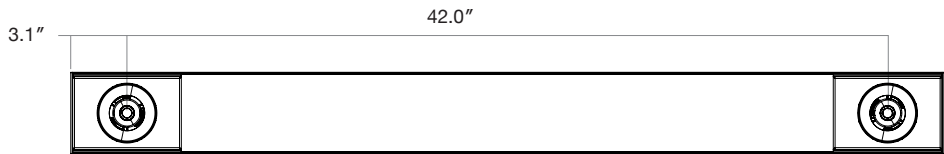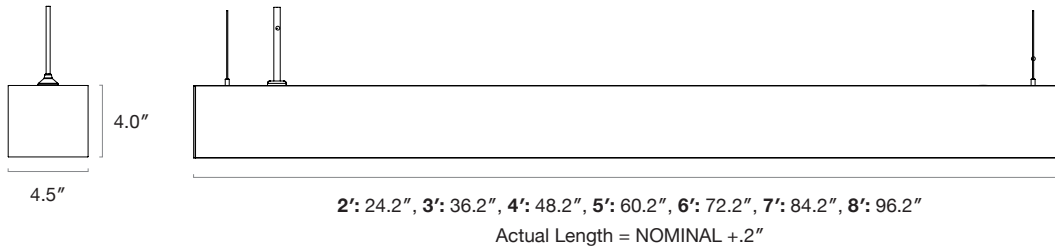


**Spot Light Locations
6' - 8' Models**

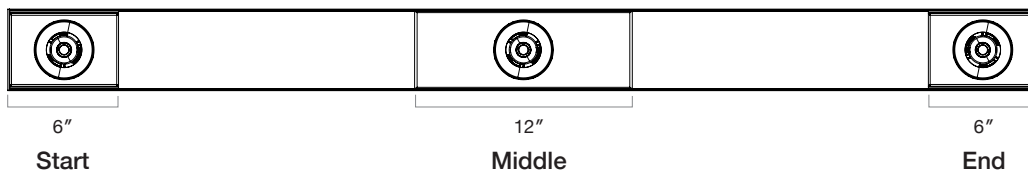


Mounting

Wall Mount Bracket

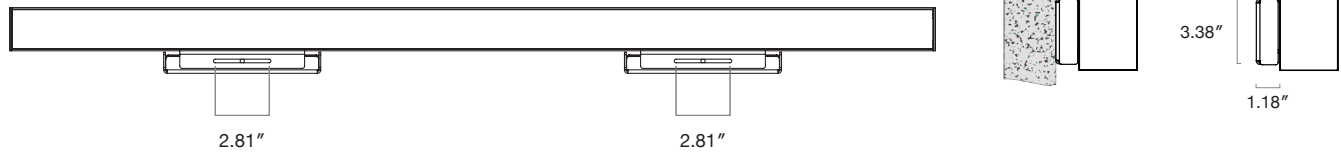


This is the central position of the wall mount bracket.
It can be adjusted Left/Right by 1.4". Secure light fixture using #8-32 screws (2x).

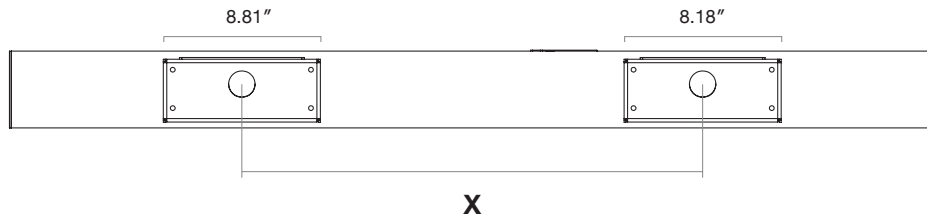

Mounting Locations


Model	Mounting Reference	Mounting Bracket (QTY)
DTL 2	Centerline	1
DTL 3		1
DTL 4	8" From Fixture Ends	2
DTL 5		2
DTL 6		2
DTL 7	Centerline & 8" From Fixture Ends	3
DTL 8		3

12" Extended Arm



Finish Options

Standard RAL Finishes



Signal White
RAL 9003




Telegrey 2
RAL 7046




Signal Black
RAL 9004

Sample Custom RAL Finishes




Traffic White
RAL 9016



Papyrus White
RAL 9018



Graphic Grey
RAL 7024



Light Grey
RAL 7035



Jet Black
RAL 9005



Graphic Black
RAL 9011



Azure Blue
RAL 5009



Gentian Blue
RAL 5010



Sky Blue
RAL 5015



Pastel Orange
RAL 2003



Pure Orange
RAL 2004



Daffodil Yellow
RAL 1007



Lemon Yellow
RAL 1012



Zinc Yellow
RAL 1018



Coral Red
RAL 3016



Rose
RAL 3017



Traffic Red
RAL 3020



Salmon Pink
RAL 3022



Olive Green
RAL 6003



Moss Green
RAL 6005



Grass Green
RAL 6010



Claret Violet
RAL 4004



Traffic Purple
RAL 4006



Pearl Blackberry
RAL 4012



Beige
RAL 1001



Nut Brown
RAL 8011



Sepia Brown
RAL 8014



Mahogany Brown
RAL 8016

Custom Finishes - Please contact factory

Additional Finishes Available - Please contact factory