

DelTask

Installation Manual

Safety & Warnings:

Failure to follow these instructions and warnings may result in death, serious injury or significant property damage.

Warning: Risk of Fire and Electrical Shock. Fixture must be installed by a qualified electrician only in accordance with National, Local Building, and Electrical Codes. Disconnect power at the electrical panel before servicing.




General contractor is responsible for the installation of appropriate anchors to support the load of the fixture at positions detailed in the installation manual. Installation of such anchors or other support systems must be completed in accordance with applicable building/ installation code.

Note: Applies to 48"/96" lengths and 4.25" and 5" widths


Steps

1.
 - Disassemble existing fixture by disconnecting power and disconnecting Black and White power supply wires from the existing ballast.
2.
 - Remove existing fixture door/louver.
3.
 - Remove existing fixture interior parts. Remove the lamps, ballast cover, socket-bars, sockets, ballast and the wiring between the ballast and the sockets.
4.
 - Assembly: Tether the DelTask retrofit kit to the existing shell using the self-drilling screws provided.

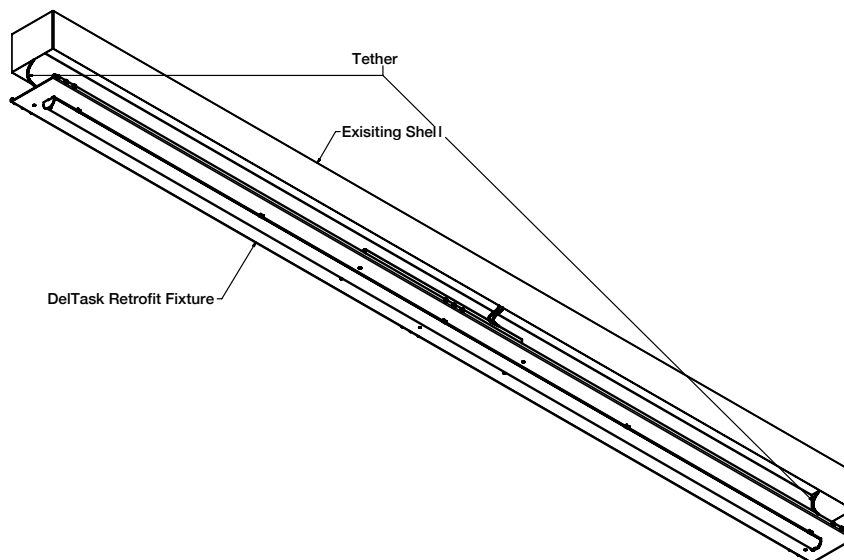

5.
 - Connect the wires from the electrical disconnect to the AC wires ensuring that the positive and negative wires are aligned.

- 5.
- Attach the DelTask Retrofit to the existing shell by using self-drilling screws at the locations indicated.

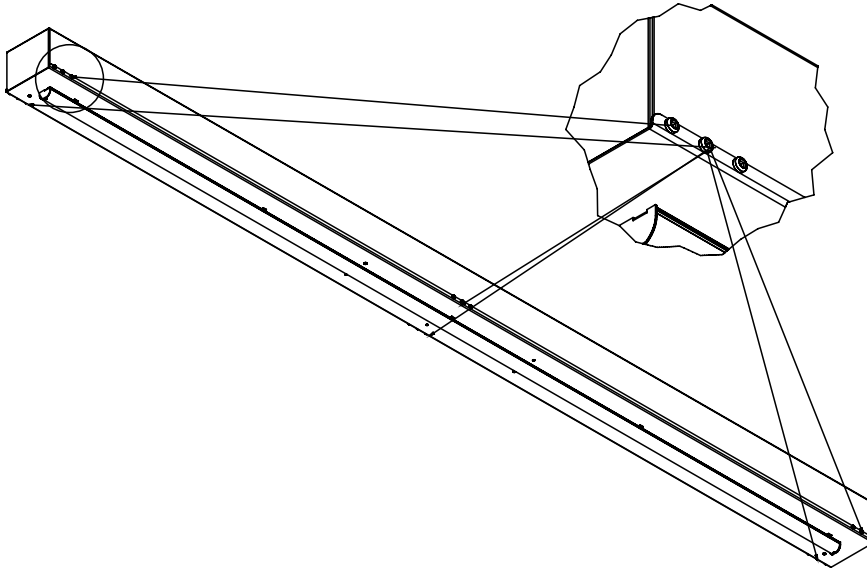

- 6.
- Reconnect power to the fixture. Fixture is now complete.