


Date	Fixture	Notes
Project		

Thinline DTL SM

Features

Architectural surface mount luminaire.
 Contemporary and minimal design.
 Acoustic felt for sound absorption.
 35 vibrant felt colours
 Dry and damp rated for indoor applications.
 Designed and Manufactured in North America.

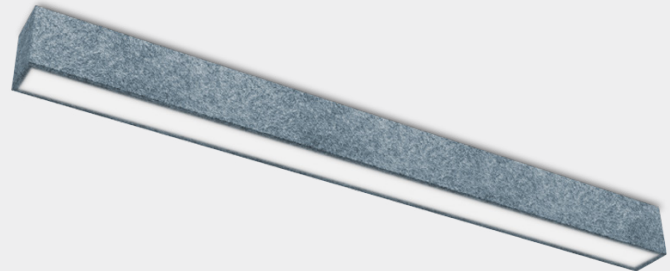

Specifications

Construction

Aluminum Extruded Body
 Cast End Caps with Light Block
 Powder Coated Finish

Dimensions

Widths: 2.25", 3.18", 4.5"
 Height: 4"
 Lengths (single units): 2' - 8', available in 6" increments
 Continuous Run: Min 2', available in 6" increments
 (100' max for one power drop)

LED

4000K - 130 Lm/W
 3500K - 98%
 3000K - 95%
 2700K-5000K
 CRI 80 | 90

Lumens/Ft - Direct

Min: 250 Lm/ft - Max: 1200 Lm/ft

Lumen Maintenance

L90>70,000

Voltage

120/277V or 347V

Driver

0-10V Dimming down to 1%, DALI, Lutron, Philips SR, ELDO

Lens: Direct

Frosted: Flat, Regressed,
 Clear, Louver,
 Frosted Drop Lens (0.5" or 1.5")

Lens: Indirect

Frosted, Asymmetric, Batwing

Finishes

Rigid Panels - 9.5mm | 0.37" Thick
 1500 GSM (44 opsy)
 60% Recycled PET Fiber
 35 Vibrant Colors

Certifications

DLC
 cULus

Warranty

5-Years

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.



Ordering Guide

Sample Configuration: DTL A SM - 3.18 - 8 - D500 - 80 - 4K - U - FR - DB-01 - SM - DIMOFF - N - N - 5 WIRE

DTL A SM										
Model	Width	Length/CR	Direct Lm/Ft	CRI	Color Temp	Voltage	Lens	Felt Color	Mounting	Driver
Controls	Accessories	Wiring								

Model	Width	Length/CR	Direct Lm/Ft	CRI	Color Temp	Voltage
DTL A SM	2.25 3.18 4.5	2' - 8' (single units) Available in 6" increments CR - Continuous Run - Min 2', available in 6" increments - Specify Length	D 250 (min) - D 1200 (max)	80 90	27K - 2700K 3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	U - 120/277V H - 347V

Lens	Felt Color	Mounting	Driver
FR - Frosted Flat Optional FFREG - Frosted Regressed ASY - Asymmetric Clear 0.5 FRDRP - 0.5" Frosted Drop Lens 1.5 FRDRP - 1.5" Frosted Drop Lens* LVR - Louver (w/ frosted regressed lens) Note: 1.5 Frosted Drop Lens for 2.25 and 3.18 model widths only	Color Code # ____ Please see felt option colors (page 5)	SM - Surface Mount	DIMOFF - 0-10V Dimming down to 1% Optional DALI - Digital Addressable Lighting Interface LUTRON - Lutron Ecosystem SR - Philips SR ELDO - Dim to 0.11% ELDO (347 only 1-10 5%)

Controls	Accessories	Wiring
N - None Optional SNS - Philips SNS 300 w/BLD & Daylight CLM - Encellium CLM LG - LG Dongle BT - Bluetooth Mesh EN - Enlighted Integral	N - None Optional 10kV - 10kV Surge Protection EM - Emergency Battery (5 or 6 Wire)* +GTD - Generator Transfer Device Note: EM - 2.25" & 3.18" models - min length 4', 4.5" model - min length 2'	5 WIRE - 5 Wire Optional 6 WIRE - 6 Wire - Emergency Battery Option (black color only) N - 5 Leads


Dimensions



W: 2.25"
H: 4.0"



W: 3.18"
H: 4.0"




W: 4.5"
H: 4.0"




2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"
Actual Length = NOMINAL +.2"

Distribution/Lens Options


Direct Distribution




Lambertian
Frosted Flat Lens




Lambertian
0.375" Frosted
Regressed Lens




Asymmetric
Clear Lens



Lambertian
0.5" Frosted
Drop Lens




Lambertian
1.5" Frosted
Drop Lens




Lambertian
Louver w/ 0.375"
Frosted Regressed
Lens


Indirect Distribution



Lambertian
Frosted Lens





Batwing
Frosted Lens




Asymmetric
Clear Lens

Mounting Options


Wall Mount Bracket

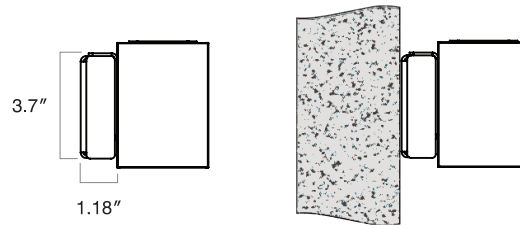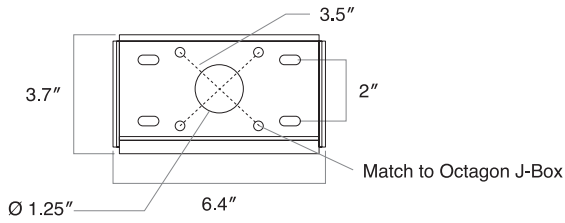

12" Extended Wall Mounted Arm

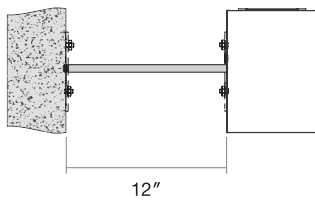

Mounting Locations

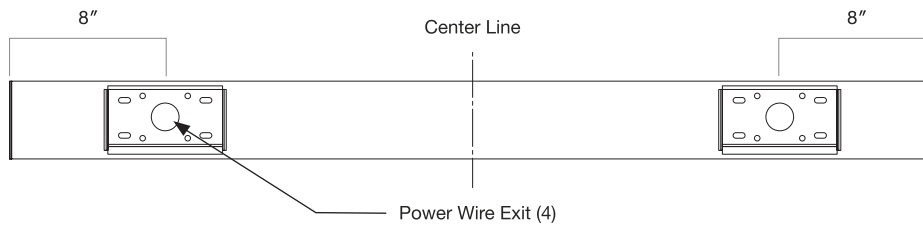

Model	Mounting Reference
DTL 2	Centerline
DTL 3	8" From Fixture Ends
DTL 4	
DTL 5	Centerline & 8" From Fixture Ends
DTL 6	
DTL 7	
DTL 8	

Designer Board Felt

9.5mm | 0.37 inches Thick
1500 GSM (44 ospy)



DB-01
Sand Dollar



DB-02
Oat



DB-03
Marble



DB-05
White



DB-06
Periwinkle



DB-07
Salmon



DB-08
Lemon



DB-09
Yellow



DB-10
Red



DB-11
Berry



DB-12
Pink



DB-13
Lilac



DB-14
Violet



DB-15
Purple



DB-16
Orange




DB-17
Pumpkin




DB-18
Maroon




DB-19
Pear



DB-20
Lime



DB-21
Green




DB-22
Heather Green




DB-23
Honey Dew



DB-24
Sky Blue



DB-25
Navy



DB-26
Midnight Blue



DB-27
Teal




DB-28
Hickory



DB-29
Brown



DB-30
Earth Brown



DB-31
Blue Jean



DB-32
Stone




DB-33
Grey



DB-34
Charcoal



DB-35
Pepper



DB-36
Black