


Date	Fixture	Project	Quantity
------	---------	---------	----------

VT4L

Vapor Tight

Features

- Weatherproof LED fixture
- Enclosed and gasketed body protects electronics from harsh weather elements
- Polycarbonate shatterproof housing
- Moisture, vapor, chemical resistant, corrosion free, and dust protective
- NSF available
- Designed and Manufactured in North America
- 5 Year Warranty

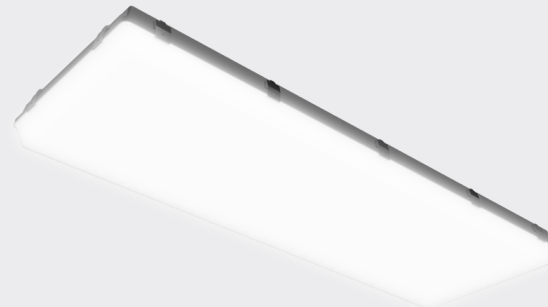

Specifications

Construction

Polycarbonate, Shatterproof Housing
 Stainless Steel Latches
 IP 65 (Grey Body - Standard)
 IP 67 (White Body - Custom Order)

Dimensions

17.1"W x 50"L x 4.3"H

LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning
 200,000+ Life Hours (L70)

Efficacy

Up to 153 Lm/W

Watts

120W, 160W, 190W, 240W

Color Temperature

3000K - 5000K

CRI

80 or 90

Voltage

120/277V or 347/480V

Controls

0-10V Dimming down to 1%

Operating Temperature

-40°C to +40°C | -40°F to +104°F
 +55°C | +131°F (option)

Lens

Frosted or Clear

Mounting

Aircraft Cable
 Surface Mount Brackets
 V-Clips

Accessories

Occupancy Sensor (on/off)
 Waterproof Occupancy Sensor,
 Bi-Level Dimming
 Waterproof Bi-Level Dimming,
 10kV Surge Protection
 Emergency Battery

Wiring

Black or White Flexible Cord, Internal

Finishes

Grey
 White - Custom

Certifications

DLC Premium
 DLC
 cULus

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.



Ordering Guide

Sample Configuration: VT4L - 120 - 80 - 4K - U - CL - GRY - AC - BFC - N - IP65 - N


VT4L									
Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting	Wiring	Accessories
Enclosure	NSF								

Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting
VT4L	120	80	3K - 3000K	U - 120/277V	FR - Frosted	GRY - Grey	AC - Aircraft Cable
	160	90	35K - 3500K	H - 347/480V	CL - Clear	<i>Optional</i>	BKTS - Surface Mount
	190		4K - 4000K			WH - White*	Brackets
	240		5K - 5000K			Note: Custom order, consult factory	V - V Hooks



Wiring	Accessories	Enclosure	NSF
BFC - Black Flexible Cord WFC - White Flexible Cord IN - Internal	N - None <i>Optional</i> OCC - Occupancy Sensor (on/off) BLD - Bi-Level Dimming (100%/10%) WBD - Waterproof Bi-Level Dimming (100%/10%) WOC - Waterproof Occupancy Sensor (on/off) 10kV - 10kV Surge Protection EM - Emergency Battery	IP65 - Standard (Grey Body) IP67 - White Body (Custom Order)	N - None NSF - White Body* Note: Custom order, consult factory

Note: For custom configurations please contact factory

Dimensions



W: 17.1"
H: 4.3"

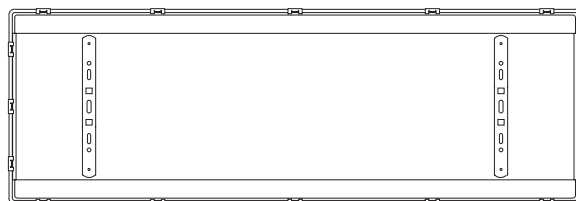

50.0"



Output Performance

Model	Watts	Lm/W	Delivered Lumens
VT4L 120	116.91	152.92	17761
VT4L 160	160.7	151.39	24328
VT4L 190	184.41	150.86	27820
VT4L 240	232.49	149.8	34830

Mounting Bracket (standard)



W: 1.625"
H: 1.625"



5.048"

