


Date	Fixture	Notes
Project		

## Del Snap 2.0

### Troffer

#### Features

- LED troffer fixture.
- Diffused acrylic lens.
- Easy Lay-in installation.
- General ceiling light applications.
- Dry and damp rated.
- Designed and Manufactured in North America.

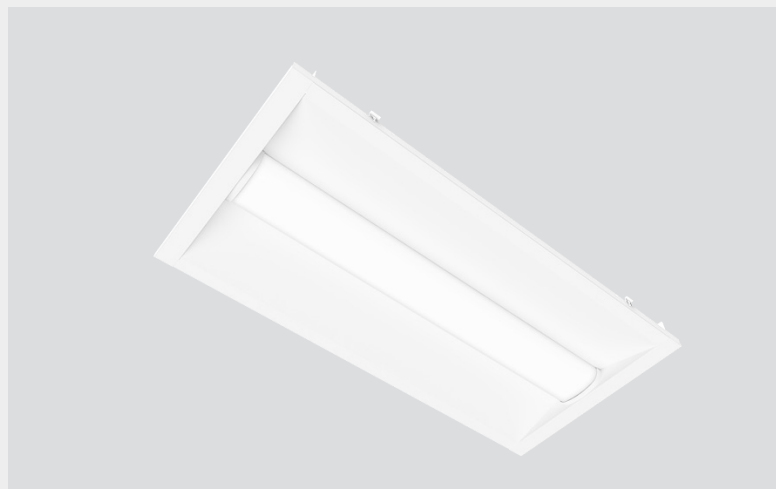

#### Specifications

##### Construction

Steel Body  
Powder Coated Finish

##### Dimensions

1x4: 11.75"W x 4"H x 47.75"L  
2x2: 19.5"W x 4"H x 23.75"L  
2x4: 23.75"W x 4"H x 47.75"L  
20x30: 19.75"W x 4"H x 29.75"L  
20x60: 19.75"W x 4"H x 59.75"L

##### LED

Samsung LM281B Plus Pro (3-Step MacAdam Binning)  
200,000+ Life Hours (L70)

##### Efficacy

130 Lm/W

##### Watts

1x4: 20W - 60W  
2x2: 20W - 30W  
2x4: 20W - 60W  
20x30: 20W - 30W  
20x60: 25W - 60W

##### Color Temperature

27000K - 5000K

##### CRI

80 or 90

##### Voltage

120/277V or 347V

##### Controls

0-10V Dimming down to 1%

##### Lens

Diffused Acrylic Lens

##### Mounting

T-Bar  
Drywall Kit

##### Accessories

Occupancy Sensor (on/off)  
Bi-Level Dimming (100%/10%)  
10kV Surge Protection  
Photo Control  
Air Handling Slots

##### Wiring

Black or White Flexible Cord

##### Finishes

White - RAL 9003  
Antimicrobial Powder Coating

##### Certifications

DLC  
cULus

##### Warranty

5-Year Warranty

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).



## Ordering Guide

Sample Configuration: DEL SNAP 2.0 - 2x2 - 30 - 80 - 4K - U - FR - WH - TBAR - IN - N

DEL SNAP 2.0						FR		
Model	Size	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting
Wiring	Accessories							

Model	Size	Watts	CRI	Color Temp	Voltage	Lens	Finish
DEL SNAP 2.0	1x4	20 - 60	80	27K - 2700K	U - 120/277V H - 347V	FR - Frosted	WH - White AM - Antimicrobial Powder Coating
	2x2	20, 25, 30	90	3K - 3000K			
	2x4	20 - 60		35K - 3500K			
	20x30	20, 25, 30		4K - 4000K			
	20x60	25 - 60		5K - 5000K			

Mounting	Wiring	Accessories		
<b>TBAR</b> - T-Bar <i>Optional</i> <b>DTRK</b> - Drywall Trim Kit	<b>IN</b> - Internal <i>Optional</i> <b>BFC</b> - Black Flexible Cord <b>WFC</b> - White Flexible Cord	<b>N</b> - None <i>Optional</i> <b>OCC</b> - Occupancy Sensor (on/off) <b>EM</b> - Emergency Battery <b>WIFI</b> - Wi-Fi Dimming <b>10kV</b> - 10kV Surge Protection <b>AH</b> - Air Handling Slots		

Note: For custom configurations please contact factory

## Dimensions

### Del Snap 1x4



W: 11.75"  
H: 4"




L: 47.75"




### Del Snap 2x2




W: 19.75"  
H: 4"



L: 23.75"




### Del Snap 2x4



W: 23.75"  
H: 4"




L: 47.75"

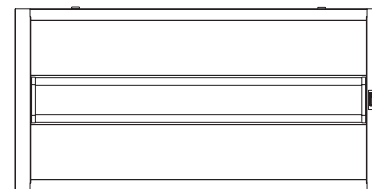


### Del Snap 20x30



W: 19.75"  
H: 4"



L: 29.75"




### Del Snap 20x60



W: 19.75"  
H: 4"



L: 59.75"

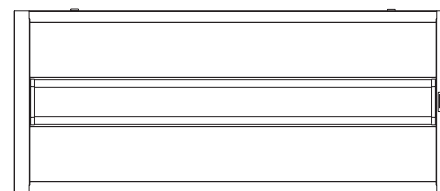


## Output Performance at 4K

Model	Watts	Lm/W	Delivered Lumens
Del Snap 1x4	20	136	2704
Del Snap 1x4	30	140	4306
Del Snap 1x4	40	136	5423
Del Snap 1x4	60	140	8600

Model	Watts	Lm/W	Delivered Lumens
Del Snap 2x4	20	136	2074
Del Snap 2x4	30	140	4306
Del Snap 2x4	40	136	5423
Del Snap 2x4	60	140	8600

Model	Watts	Lm/W	Delivered Lumens
Del Snap 2x2	22.5	116	2625
Del Snap 2x2	25	127	3180
Del Snap 2x2	31.5	128	4002

## Photometrics



Del Snap 2.0  
2x4, 4K

### ZONAL LUMEN SUMMARY

Zone	Lumens	% of Fixture
0° - 30°	1434	26%
0° - 60°	4116	76%
0° - 90°	5422	100%
90° - 120°	0	0%
90° - 150°	0	0%
90° - 180°	0	9%
0° - 180°	5422	100%
20° - 50°	2578	48%

### ZONAL LUMEN SUMMARY

Zone	Lumens
0° - 10°	178
10° - 20°	502
20° - 30°	754
30° - 40°	897
40° - 50°	928
50° - 60°	857
60° - 70°	698
70° - 80°	466
80° - 90°	143
90° - 100°	0
100° - 110°	0
110° - 120°	0
120° - 130°	0
130° - 140°	0
140° - 150°	0
150° - 160°	0
160° - 170°	0
170° - 180°	0