

Date	Fixture	Project	Quantity
------	---------	---------	----------

Zip Cloud

Recessed Drywall Ceiling

Features

- Architectural luminaire
- Sleek circular shape
- 4 size options
- Multiple finishes
- Designed and Manufactured in North America
- 5 Year Warranty



Specifications

Construction

Aluminum extruded body
Dry and damp rated for indoor applications

Dimensions

Diameter: 18", 24", 36", 44"
Height: 4"

LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning
120 Lm/W
L70>200,000

Watts

Zip Cloud 18: 20W, 40W, 60W, 70W
Zip Cloud 24: 20W, 40W, 60W, 80W
Zip Cloud 36: 40W, 80W, 120W, 160W
Zip Cloud 44: 80W, 120W, 160W

Color Temperature

2700K - 5000K

CRI

80 or 90

Voltage

120/277V or 347V

Driver

0-10V Dimming down to 1%
No Dimming

Lens

Frosted Flat

Mounting

Recessed Drywall Ceiling

Wiring

Black and White 3 Conductor Wire (No Dimming)
Black and White 5 Conductor Wire

Finishes

White - RAL 9003

Certifications

cULus



Ordering Guide


Sample Configuration: ZIP CLOUD REC - 18 - 70 - 80 - 4K - U - FR - DIRECT - WH - REC - DIMOFF - IN

ZIP CLOUD REC						FR	DIRECT	WH	REC
Model	Size	Watts	CRI	Color Temp	Voltage	Lens	Distribution	Finish	Mounting
Driver	Wiring								

Model	Size	Watts	CRI	Color Temp	Voltage	Lens	Distribution
ZIP CLOUD REC	18	18: 20, 40, 60, 70	80	3K - 3000K	U - 120/277V H - 347V	FR - Frosted Flat	DIRECT
	24	24: 20, 40, 60, 80	90	35K - 3500K			
	36	36: 40, 80, 120, 160		4K - 4000K			
	44	44: 80, 120, 160		5K - 5000K			

Finish	Mounting	Driver	Wiring
WH - White	REC - Recessed (Drywall Ceiling)	DIMOFF - 0-10V Dimming down to 1% ND - No Dimming	IN - Internal <i>Optional</i> BFC 3 Wire - Black 3 Conductor Wire (no dimming) WFC 3 Wire - White 3 Conductor Wire (no dimming) BFC 5 Wire - Black 5 Conductor Wire WFC 5 Wire - White 5 Conductor Wire

Dimensions

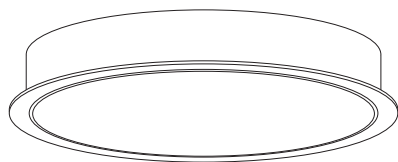

Ø: 18", 24", 36", 44"
 Ø(w/ trim): 18.75", 25", 37.25", 45"
 H: 4.0"

Output Performance

Model	Watts	Lm/W	Delivered Lumens
Zip Cloud 18	20	120	2,400
	40		4,800
	60		7,200
	70		8,400
Zip Cloud 24	20	120	2,400
	40		4,800
	60		7,200
	80		9,600
Zip Cloud 36	40	120	4,800
	80		9,600
	120		14,400
	160		19,200
Zip Cloud 44	80	120	9,600
	120		14,400
	160		19,200

Mounting

