



Date: _____ Fixture: _____

QTY: _____ Project: _____

DelSnap

Metric Troffer Fixture

PRODUCT DETAILS

LED Metric Troffer luminaire. Steel construction. White finish with frosted lens. T-Bar mounting. Easy lay-in installation. 10kV surge protection and occupancy sensor options. Wifi dimming option. General ceiling light applications. 10 Year Warranty.

SPECIFICATIONS

Efficacy: 116 Lm/W

CRI: 83+

Color Temperature: 2700K, 3000K, 3500K, 4000K, 5000K

Lumen Maintenance: 180,000+ Life Hours (L70)

Watts: 20W, 30W, 40W, 60W

Voltage: 120/277V | 347V

Controls: 0-10V Dimming | Wifi dimming option

Operating Temperature: -40°C to +40°C

MOUNTING OPTION

T-Bar

ACCESSORIES

Occupancy Sensor (on/off), 10kV Surge Protection

OUTPUT PERFORMANCE

Model	Watts	Lm/W	Delivered Lumens
300 x 300	20	116	2,320
300 x 300	30	116	3,480
300 x 300	40	116	4,640

Model	Watts	Lm/W	Delivered Lumens
300 x 1200	20	116	2,320
300 x 1200	30	116	3,480
300 x 1200	40	116	4,640
300 x 1200	60	116	6,960

Model	Watts	Lm/W	Delivered Lumens
300 x 1500	30	116	3,480
300 x 1500	40	116	4,640
300 x 1500	60	116	6,960


Model	Watts	Lm/W	Delivered Lumens
500 x 1200	20	116	2,320
500 x 1200	30	116	3,480
500 x 1200	40	116	4,640
500 x 1200	60	116	6,960

Model	Watts	Lm/W	Delivered Lumens
500 x 1500	20	116	2,320
500 x 1500	30	116	3,480
500 x 1500	40	116	4,640

Specifications subject to change without notice.

DIMENSIONS

Sizes: 300 x 300 | 300 x 1200 | 300 x 1500 | 500 X 1200 | 500 x 1500

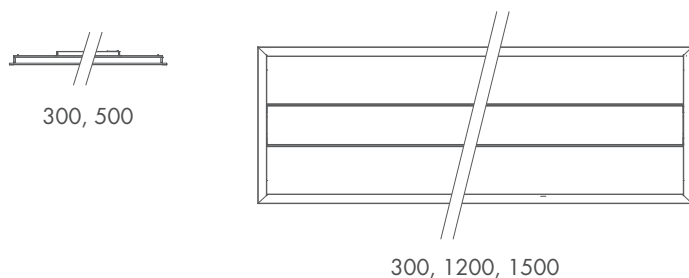

ORDERING OPTIONS

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
DelSnap 300x300	20,30,40	27K 2700K	U 120/277V	NL Normal Frosted Lens (Standard)	WH White	T BAR T Bar
DelSnap 300x1200	20,30,40,60	3K 3000K	H 347V			
DelSnap 300x1500	30,40,60	35K 3500K				
DelSnap 500x1200	20,30,40, 60	4K 4000K				
DelSnap 500x1500	20,30,40	5K 5000K				

NL

WH

T BAR

WIRING	ACCESSORIES	PLUG OPTION
BFC Black Flexible Cord	N None	N None
WFC White Flexible Cord	*OCC Occupancy Sensor (on/off)	*See Plug Options
	10kV 10kV Surge Protection	
	WIFI Wifi Dimming	

NOTE

OCC - Occupancy Sensor - Please consult factory

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug	6-20P - 250V AC 20A Plug	24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L5-15P - 125V 15A Locking Plug	L6-20P - 250V 20A Locking Plug	L24-20P - 347V 20A Locking Plug
5-20P - 125V AC 20A T-Slot Plug	7-15P - 277V 15A 3W/2P NEMA 7-15 Plug	24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15
L5-20P - 125V 20A Locking Plug	L7-15P - 277V 15A Locking Plug	
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15	7-20P - 277V AC 20A Plug	
L6-15P - 250V 15A Locking Plug	L7-20P - 277V 20A Locking Plug	