

10YR
WARRANTY


Date: _____ Fixture: _____

QTY: _____ Project: _____



TitanHB C

High Bay

LED high bay luminaire. Aluminum construction with polycarbonate protective lens. Dry and Damp rated. Natatorium option available. Driver accessible drawer. Commercial, industrial, sports arenas, sport complex and gymnasium applications. DLC and cULus listed. 10 Year Warranty.

Ordering Options

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
TitanHB	C80 C120 C160 C240 C320 C480	3K 3000K 35K 3500K 4K 4000K 5K 5000K	U 120/277V H 347/480V	FR Frosted CL Clear CLG Clear Glass	WH White CU Custom	V V Hook JC72 Jack Chain Set 4 X 72" w/ "S" hooks included JC96 Jack Chain Set 4 X 96" w/ "S" hooks included JC144 Jack Chain Set 4 X 144" w/ "S" hooks included ACY120 Aircraft Cable 120" W/Y Toggles & Adjusters ACY200 Aircraft Cable 200" W/Y Toggles & Adjusters

TITAN HB						
----------	--	--	--	--	--	--

MOUNTING (CONT.)		WIRING	ACCESSORIES	PLUG OPTIONS
MS3-1/2W	Mounting Stem 1/2" IPS (7/8" O.D.) 3' threaded at both ends	BFC Black Flexible Cord	N None	N None
MS4-1/2W	Mounting Stem 1/2" IPS (7/8" O.D.) 4' threaded at both ends	WFC White Flexible Cord	OCC Occupancy Sensor (on/off)	*See Plug Options
MS6-1/2W	Mounting Stem 1/2" IPS (7/8" O.D.) 6' threaded at both ends		*WC Wireless Controls	
MS8-1/2W	Mounting Stem 1/2" IPS (7/8" O.D.) 8' threaded at both ends		BLD Bi Level Dimming (100%/10%)	
1/2 NPT	Diecast Mounting Plate with 1/2" NPT		GCC Gasketed and Conformal Coated	
3/4 NPT	Diecast Mounting Plate with 3/4" NPT		DA Dimming Wire Accessible	
IND	Indirect-Uplight mounting bracket		10kV 10kV Surge Protection	
*TG	T-Grid (Kit)			

--	--	--	--

SAMPLE: TITANHB - C120 - 4K - U - FR - WH - V - BFC - N - N

TG - See TitanHB 80 and TitanHB 160 with recessed kit specification sheet or consult factory

WC - Please consult factory

TitanHB Natatorium - includes conformal coated boards and gasketing for damp and chlorine rated environments

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug

L5-15P - 125V 15A Locking Plug

5-20P - 125V AC 20A T-Slot Plug

L5-20P - 125V 20A Locking Plug

6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15

L6-15P - 250V 15A Locking Plug

6-20P - 250V AC 20A Plug

L6-20P - 250V 20A Locking Plug

7-15P - 277V 15A 3W/2P NEMA 7-15 Plug

L7-15P - 277V 15A Locking Plug

7-20P - 277V AC 20A Plug

L7-20P - 277V 20A Locking Plug

24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20

L24-20P - 347V 20A Locking Plug

24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Specifications subject to change without notice.

Product Details

Specifications

Efficacy: Up to 154 Lm/W

CRI: 86

Color Temperature: 3000K, 3500K, 4000K, 5000K

Lumen Maintenance: 200,000+ Life Hours (L70)

Voltage: 120/277V | 347/480V

Operating Temperature: -25°C to +40° | -25°C to +55° - option available

Controls

0-10V Dimming, Wifi, Occupancy Sensor, Bi-Level Dimming

Mounting

V Hook, Jack Chain, Aircraft Cable, Mounting Stem, Diecast Mounting Plate, Indirect-Uplight Mounting Bracket

Accessories

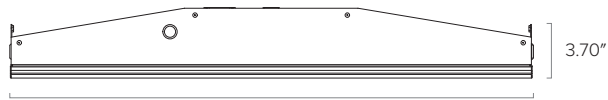
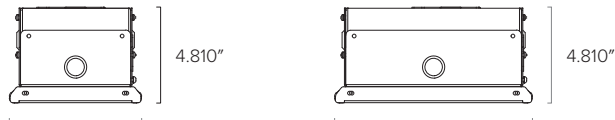
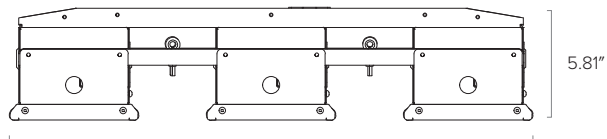

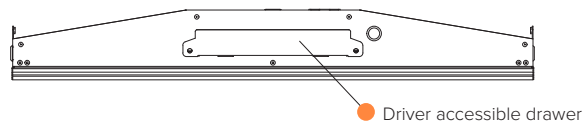
Gasketed and Conformal Coated, Dimming, Wire Accessible, 10kV Surge Protection

Output Performance

Model	Watts	Lm/W	Lumens
TitanHB 80c	75.8	144	11,057
TitanHB 120c	111.7	153	17,312
TitanHB 160c	156	146	22,725
TitanHB 240c	223	149	33,346
TitanHB 320c	296	148	43,595
TitanHB 480c	444	154	68,620

Specifications subject to change without notice.

Dimensions


A

B
C

C

Models	Nominal Length	Width	Width
	A	B	C
Titan HB 80	24"	6.654"	
Titan HB 120	36"	6.654"	
Titan HB 160	47.5"	6.654"	
Titan HB 240	36"		12.60"
Titan HB 320	47.5"		12.60"
Titan HB 480	47.5"		27.22"

Specifications subject to change without notice.