



EMI Compliance:
FCC Part 15 Class A

Date: _____ Fixture: _____

QTY: _____ Project: _____



Airflex High Bay

Commercial and industrial LED high bay. Suspended mounting. Steel construction with high gloss white finish. 2' and 4' lengths. Occupancy Sensor, Bi-Level Dimming and 10kV Surge protection available options. Dry and damp rated. DLC and cULus listed. 10 Year Warranty.

Ordering Options

MODEL	LENGTH	WATTS: 2ft	WATTS: 4ft	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
Airflex	2	80	80	3K 3000K	U 120/277V	NL No Lens (standard)	WH White	V V Clips
	4	110 135	110 135 160 240 190 320 400 480	35K 3500K 4K 4000K 5K 5000K	H 347/480V	FR Frosted CL Clear		AC Aircraft Cable

AIRFLEX

WIRING	ACCESSORIES	REFLECTOR	AISLE OPTICS	PLUG OPTIONS
BFC Black Flexible Cord WFC White Flexible Cord	N None OCC Occupancy Sensor (on/off) BLD Bi-Level Dimming (100%/10%) 10kV 10kV Surge Protection EMBAT Emergency Battery	N None 60AF 60 Deg. Aisle Reflector	N None AISLE OPTICS	N None *See Plug Options

SAMPLE: Airflex - 2- 80 - 4K - U - FR - WH - AC - BFC - N - N - N - N

PLUG OPTIONS

- 5-15P** - 125V 15A T-Slot Plug
- 15-15P** - 125V 15A Locking Plug
- 5-20P** - 125V AC 20A T-Slot Plug
- L5-20P** - 125V 20A Locking Plug
- 6-15P** - 250V AC 15A 3W/2P Plug NEMA 6-15
- L6-15P** - 250V 15A Locking Plug
- 6-20P** - 250V AC 20A Plug
- L6-20P** - 250V 20A Locking Plug
- 7-15P** - 277V 15A 3W/2P NEMA 7-15 Plug
- L7-15P** - 277V 15A Locking Plug
- 7-20P** - 277V AC 20A Plug
- L7-20P** - 277V 20A Locking Plug
- 24-20P** - 347V AV 20A 3W/2P Plug NEMA 24-20
- L24-20P** - 347V 20A Locking Plug
- 24-15P** - 347V AC 15A 3W/2 Plug NEMA 24-15

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Specifications subject to change without notice.

Product Details

Specifications

Efficacy: 2: Up to 147 Lm/W | 4: Up to 157 Lm/W
 CRI: 83
 Color Temperature: 3000K, 3500K, 4000K, 5000K
 Lumen Maintenance: 200,000+ Life Hours (L70)
 Voltage: 120/277V | 347/480V
 Operating Temperature: -20°C to +55°C

Controls

0-10 V Dimming

Mounting

V Clips, Aircraft Cable

Accessories

Occupancy Sensor (on/off)
 Bi Level Dimming (100%/10%)
 10kV Surge Protection
 60 Deg Aisle Reflectors
 Emergency Battery


Output Performance

Model: Airflex 2	Watts	Lm/W	Lumens	Model: Airflex 4	Watts	Lm/W	Lumens
Airflex 2 80	80	144	11,331	Airflex 4 80	80	156.7	12,348
Airflex 2 110	105	142	14,910	Airflex 4 110	105	151	15,845
Airflex 2 135	135	146.5	19,837	Airflex 4 135	135	147	19,854
				Airflex 4 160	160	142.5	22,940
				Airflex 4 190	190	145	27,550
				Airflex 4 240	240	142.5	34,411
				Airflex 4 320	320	142.5	45,881
				Airflex 4 400	400	142.5	57,352
				Airflex 4 480	480	142.5	68,822


Specifications subject to change without notice.

Dimensions


Airflex 2

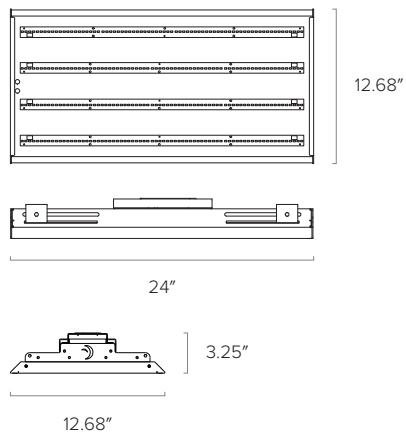


Airflex 4

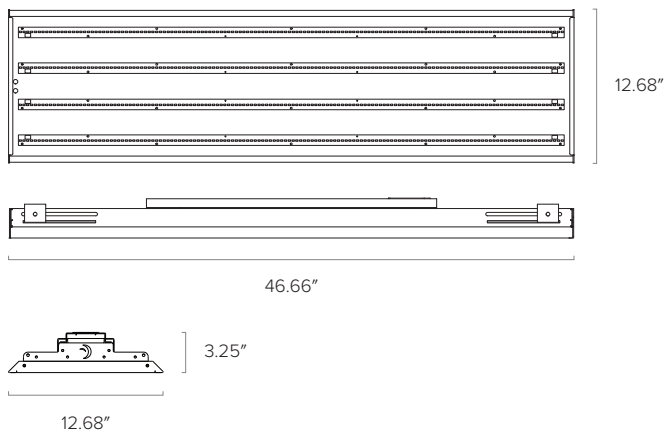

Airflex 4 - 320W

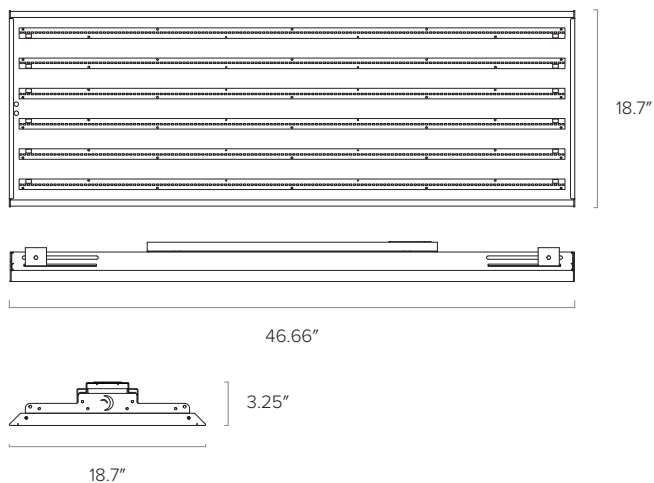

Airflex 4 - 400W

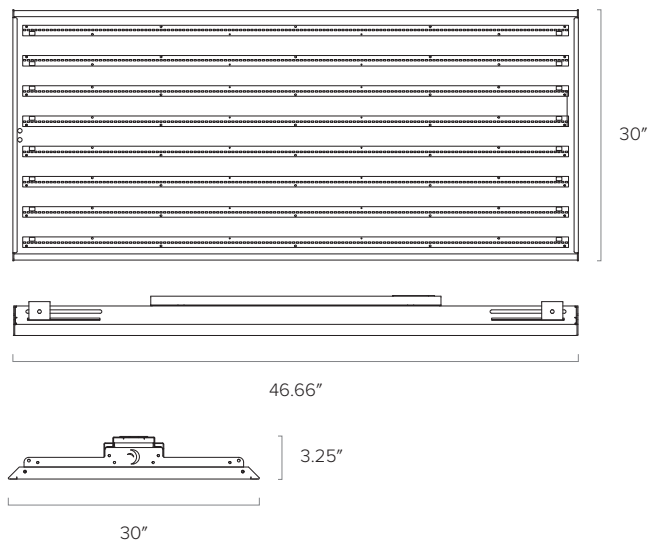

Specifications subject to change without notice.