



 DLC on Some  
Linear Models

Date: \_\_\_\_\_ Fixture: \_\_\_\_\_

QTY: \_\_\_\_\_ Project: \_\_\_\_\_

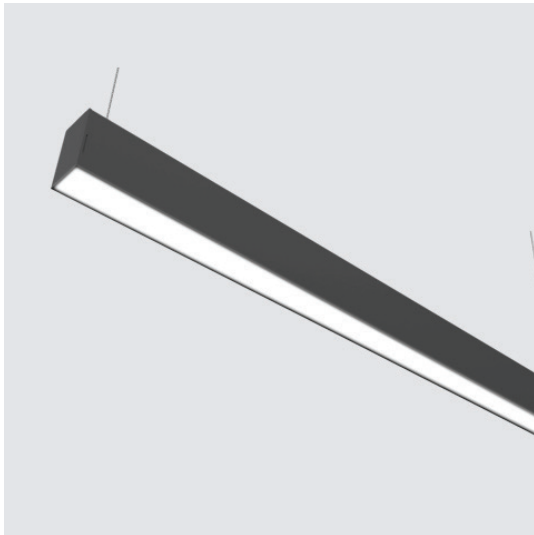

## Thinline 2.25

### Suspended Direct

### Cast End Caps with Light Block

### Multiple Lens and Customizations Available

Architectural luminaire. Pendant mounting. Slim contemporary design. Aluminum extruded body. Continuous runs with lit corners available. L90 > 70K Hours. Designed and manufactured in North America. 10 Year Warranty.

### Performance

Color Temp	Lm/W
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W

### Ordering Options

MODEL	CONTINUOUS RUN	DIR LUMENS	CRI	COLOR TEMP	VOLTAGE	LENS	FINISH
<b>DTL SD 2.25</b>	CR _____ - Min 2' - Available in 6" increments - Unibody, up to 8'	D 250 D 500 D 750 D 1000 D _____ Custom Up to 1200	80 90	27K 2700K 3K 3000K 35K 3500K 4K 4000K 5K 5000K BIOS	U 120/277V H 347V	FR Frosted FRREG Frosted Regressed ASY Asymmetric .5" FR DROP 1.5" FR DROP	GRY Grey WH White BLK Black CU Custom

<b>DTL SD 2.25</b>							
--------------------	--	--	--	--	--	--	--

MOUNTING	DRIVER	CONTROLS	CIRCUITS	ACCESSORIES
AC Aircraft Cable 10' Std TR Threaded Rod _____ TB9 T Bar 9/16 TB15 T Bar 15/16	DIMOFF 0-10 1% DIMOFF Driver LUTRON Lutron Ecosystem Driver SR Philips SR DALI ELDO .1% ELDO LED Driver * 347 only in 1 - 10 5%	N None DMX SNS Philips SNS 300 w/ BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral	1 One circuit 2 Two circuits	N None 10kV 10kV Surge Protection EMBAT 6W 90 Min BAT

--	--	--	--	--

WIRING	WIRE COLOR	WIRE LENGTH
5 WIRE 6 WIRE (NL) +GTD Generator Transfer Device N None	G Grey W White B Black C Clear	_____'

--	--	--	--	--

SAMPLE: DTL SD 2.25 - CR8 - D500 - 80 - 4K - U - FR - WH - S - DIMOFF - N - 1 - N - 5WIRE - W - 6'

Available with BIOS® (please consult factory)  
Specifications subject to change without notice.

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

**10YR**  
WARRANTY

## LED

L90 > 70,000

Samsung 301 3 McAdam Binning

4000K 120 Lm/W

3500K 98%

3000K 96%

90 CRI 85%

## Optics



Flat


0.25" Regressed

Asymmetric



0.5" Drop Lens

1.5" Drop Lens



## Lens Options





Standard  
Frosted Flat





0.25"  
Regressed Lens




Asymmetric



0.5" Drop Lens




1.5" Drop Lens




## Mounting


### T BAR

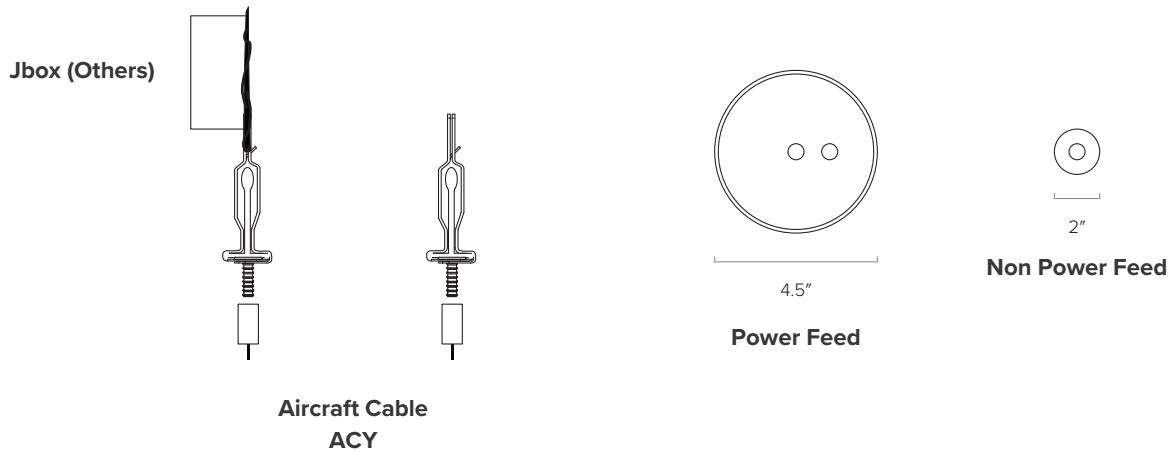


### DRYWALL

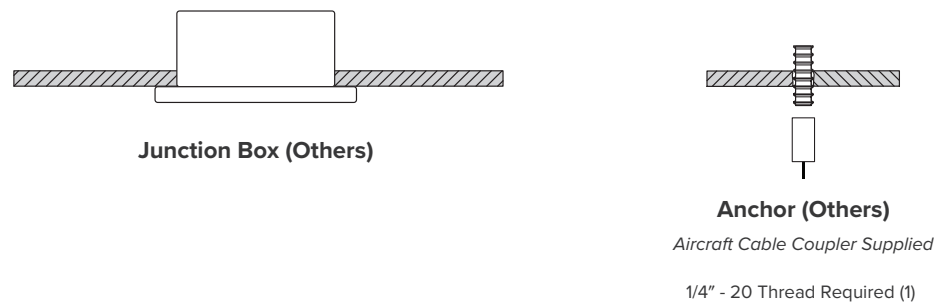

### STEM

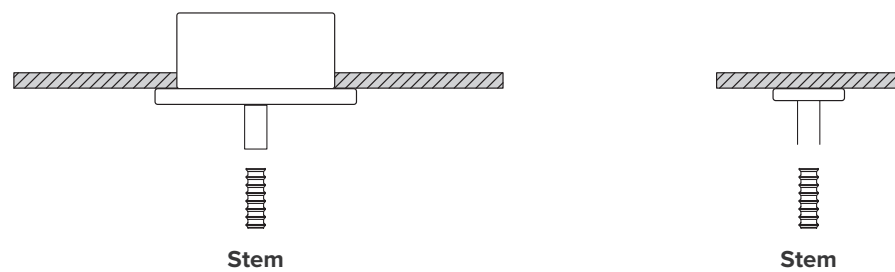


## Measurements



2.25"

4"




2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"

Actual Length = NOMINAL +.2"

## Lit Corner Hubs



Lit Corner 90°



Lit Corner 135°



T-Hub



Y-Hub




X-Hub


**\*\* Custom Available \*\***

## Lit Corner Hubs - Shapes


### Sample Configurations




*Lit Corner Hub 90°*



*Lit Corner Hub 90°*

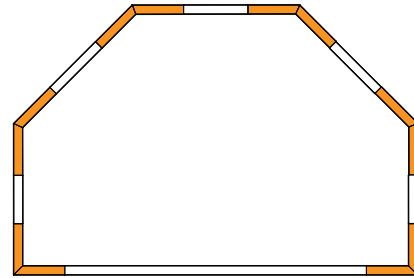


*Lit Corner Hub 90° & Lit Corner Hub 135°*

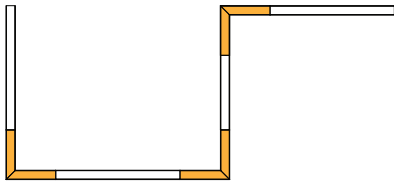


*Lit Corner Hub 90°*




*Lit Corner Hub 90°*

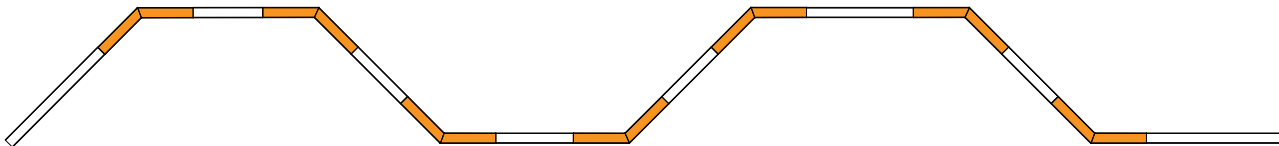


*Lit Corner Hub 135°*

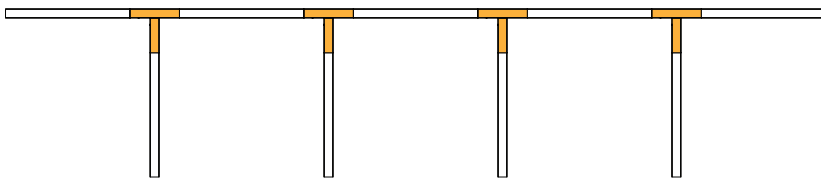

*Lit Corner T-Hub*




*Lit Corner X-Hub*




*Lit Corner Y-Hub*

## Finishes


### Standard Finishes



**Delviro Grey**  
RAL 7046  
Sandtex




**Delviro White**  
RAL 9003  
Sandtex




**Delviro Black**  
RAL 9004  
Sandtex


### Custom Finishes




**Delviro Orange**  
RAL 2009  
Sandtex



**Delviro Blue**  
RAL 5012  
Sandtex



**Delviro Yellow**  
RAL 1037  
Sandtex



**Delviro Green**  
RAL 6010  
Sandtex

*Additional Finishes Available - Please consult factory*