


10[★]
WARRANTY

DATE	FIXTURE	QTY	PROJECT

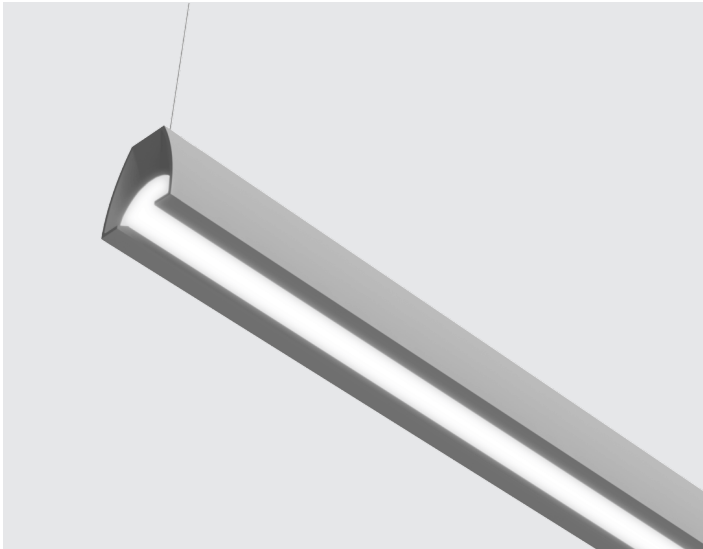

Thinline Arch

Pendant Mounting
Direct | Direct-Indirect

Architectural luminaire. Contemporary design. Aluminum housing. Direct and Direct - Indirect options. 4, 6, and 8 foot length options. Frosted lens. Standard Grey, white and black finishes. Custom finishes available. Designed and manufactured in North America. 10 Year Warranty.

ORDERING GUIDE

MODEL	LENGTH	DIRECT: WATTS/FT	INDIRECT: WATTS/FT	COLOR TEMP	VOLTAGE	LENS OPTIONS
DTL	4'	2.5	2.5	27K	U H 120/277V 347V	FR Frosted
	6'	3.5	3.5	3K 3000K		
	8'	5	5	35K 3500K		
	7.5	7.5	4K 4000K			
	10	10	5K 5000K			
DTL						FR

FINISH	MOUNTING	WIRING	ACCESSORIES	FIXTURE TYPE
GRY Grey WH White BLK Black CU Custom (consult factory)	AC Aircraft Cable	BFC Black Flexible Cord WFC White Flexible Cord GFC Grey Flexible Cord 3 WIRE 3 Conductor Wire _____ 5 WIRE 5 Conductor Wire _____ N No Cord	N None DALI DMX 10kV 10kV Surge Protection EMBAT Emergency Battery Backup	ARCH
	AC			ARCH

SAMPLE: DTL-4-6-2.5-2.5-4K-U-FR-GRY-AC-BFC-N-ARCH

SPECIFICATIONS

Efficacy: 75 Lm/W
 CRI: 80+
 Color Temperature: 3000K, 3500K, 4000K, 5000K
 Lumen Maintenance: 200,000+ Life Hours (L70)
 Voltage: 120/277V | 347V
 Operating Temperature: -20°C to +40°C

Controls

0-10V Dimming
 DMX
 DALI

Mounting

Aircraft Cable

Wiring

Black, White, and Grey flexible cord
 3 and 5 Conductor Wire

OUTPUT PERFORMANCE

Distribution	Watts/ft	Delivered Lumens/ft
Direct	2.5	187.5
	3.5	262.5
	5	375
	7.5	562.5
	10	750

Distribution	Watts/ft	Delivered Lumens/ft
Indirect	2.5	187.5
	3.5	262.5
	5	375
	7.5	562.5
	10	750

MEASUREMENTS

