



Date:	Quantity:	Fixture:	Project:



# Zip Eco

## Linear

LED Luminaire. 4' and 8' length options. Steel construction. High impact acrylic lens. Wall mountable option. Screw in LED pan single ground screw for easy installation. Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment. Dry and Damp rated. Designed and manufactured in North America. 10 Year Warranty.

## Ordering Options

MODEL	WATTS	COLOR TEMP		VOLTAGE		LENS		FINISH		MOUNTING		WIRING	
Zip 4 Zip 8	20, 30, 40, 60 40, 60, 80, 100, 120, 160	3K 35K 4K 5K	3000K 3500K 4000K 5000K	U H	120/277V 347V	FR	Frosted	WH	White	V FM	V Hooks Flush Mount	N BFC	No Cord Black Flexible Cord
						FR		WH					

ACCESSORIES	TYPE
N OCC 10kV WG RFL EMBAT	None Occupancy Sensor (on/off) 10kV Surge Protection Wire Guard Reflector Emergency Battery Backup
	Zip Eco
	ZIP ECO

SAMPLE: ZIP - 4 - 40 - 4K - U - FR - WH - V - BFC - N - ZIP ECO

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

## Specifications

Efficacy: 4: Up to 145 Lm/W | 8: Up to 146 Lm/W  
 CRI: 86  
 Color Temperature: 3000K, 3500K, 4000K, 5000K  
 Lumen Maintenance: 200,000+ Life Hours (L70)  
 Voltage: 120/277V | 347V  
 Operating Temperature: -20°C to +40°C

### Mounting

Suspended, Flush Mount

### Controls

0-10V Dimming (347V)




### Accessories

Occupancy Sensor  
 10kV Surge Protection  
 Wire Guard  
 9.91" Reflector  
 Emergency Battery Backup


## Output Performance

Model	Input Watts	Lm/W	Delivered Lumens	Model	Input Watts	Lm/W	Delivered Lumens
Zip 4 20	20	3K 137 Lm/W	2,740	Zip 8 40	38	140	5,320
		35K 140 Lm/W	2,800	Zip 8 60	60	146	8,760
		4K 143 Lm/W	2,860	Zip 8 80	75	140	10,500
		5K 145 Lm/W	2,900	Zip 8 100	100	140	14,000
Zip 4 30	30	3K 137 Lm/W	4,110	Zip 8 120	120	140	16,800
		35K 140 Lm/W	4,200	Zip 8 160	160	140	22,400
		4K 143 Lm/W	4,290				
		5K 145 Lm/W	4,350				
Zip 4 40	40	3K 137 Lm/W	5,480				
		35K 140 Lm/W	5,600				
		4K 143 Lm/W	5,720				
		5K 145 Lm/W	5,800				
Zip 4 60	60	3K 134 Lm/W	8,040				
		35K 137 Lm/W	8,220				
		4K 140 Lm/W	8,400				
		5K 142 Lm/W	8,520				


### Dimensions

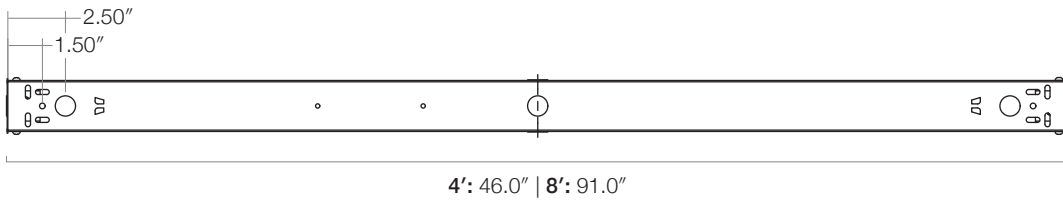


### Wire Guard Option

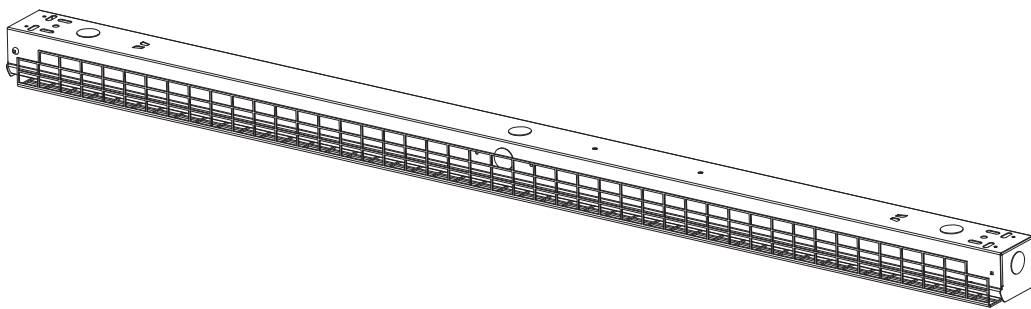

**Reflector Option**

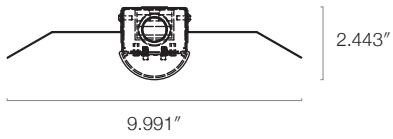

**Zip Eco 4**

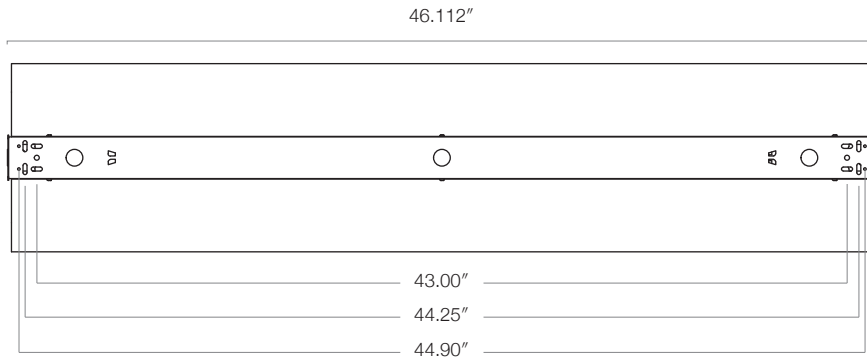

**Zip Eco 8**

