


10YR
WARRANTY

Date: _____ Fixture: _____

QTY: _____ Project: _____



Zip

Linear Luminaire

LED Luminaire. 2', 4', and 8' length options. High impact acrylic lens. Wall mountable option. Screw in LED pan single ground screw for easy installation. Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment. Dry and Damp rated. DLC Listed. cULus listed. 10 Year Warranty.

Ordering Options

MODEL	LENGTH	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
Zip	2	2: 15, 20, 30	3K 3000K	U 120/277V	FR Frosted	WH White	V V Hooks
	4	4: 15, 20, 30, 40, 60, 80, 100	35K 3500K	H 347V	CL Clear		SM Surface Mount
	8	8: 40, 60, 80, 100, 120	4K 4000K 5K 5000K				

ZIP						WH	
-----	--	--	--	--	--	----	--

WIRING	ACCESSORIES	PLUG OPTIONS
BFC Black Flexible Cord WFC White Flexible Cord IN Internal 5WIRE	N None OCC Occupancy Sensor (on/off) UOCC Ultrasonic BLD Sensor BLD Bi Level Dimming (100%/10%) - Programmable DELBLD 5 Min 50% Delviro Sensor EMBAT Emergency Battery 10kV 10kV Surge Protection MICRO Microwave Sensor	N None *See Plug Options

--	--	--

SAMPLE: ZIP - 4 - 60 - 4K - U - FR - WH - V - BFC - N - N

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug

L5-15P - 125V 15A Locking Plug

5-20P - 125V AC 20A T-Slot Plug

L5-20P - 125V 20A Locking Plug

6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15

L6-15P - 250V 15A Locking Plug

6-20P - 250V AC 20A Plug

L6-20P - 250V 20A Locking Plug

7-15P - 277V 15A 3W/2P NEMA 7-15 Plug

L7-15P - 277V 15A Locking Plug

7-20P - 277V AC 20A Plug

L7-20P - 277V 20A Locking Plug

24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20

L24-20P - 347V 20A Locking Plug

24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Specifications subject to change without notice.

Product Details

Specifications

Efficacy: 2: Up to 136 Lm/W | 4: Up to 140 Lm/W | 8: Up to 156 Lm/W

CRI: 86

Color Temperature: 3000K, 3500K, 4000K, 5000K

Lumen Maintenance: 200,000+ Life Hours (L70)

Voltage: 120/277V | 347V

Watts: 2: 15, 20, 30 | 4: 15, 20, 30, 40, 60, 80, 100

8: 40, 60, 80, 100, 120

Controls: 0-10V Dimming

Operating Temperature: -35°C to +45°C

Mounting

V Hook, Flush Mount

Accessories

Occupancy Sensor

Ultrasonic BLD sensor

Bi Level Dimming

5 min 50% Sensor

Emergency Backup

10kV Surge Protection

Performance

Model	Input Watts	Lm/W	Delivered Lumens
Zip 2 15	13.65	134.5	1,836
Zip 2 20	22.1	135.1	2,999
Zip 2 30	30.67	135.7	4,161

Model	Input Watts	Lm/W	Delivered Lumens
Zip 4 15	15	140	1,766
Zip 4 20	20.3	140	2,885
Zip 4 30	29.8	140	4,003
Zip 4 40	41.6	140	5,378
Zip 4 60	59.7	140	8,272
Zip 4 80	79	140	11,060
Zip 4 100*	97.8	139	13,659


Note: Zip 4 100 - 120/277V

Model	Input Watts	Lm/W	Delivered Lumens
Zip 8 40	38	156	5,911
Zip 8 60	57	156	8,765
Zip 8 80	75	155	11,602
Zip 8 100*	99.2	155	15,400
Zip 8 120*	116	152	17,830

Note: Zip 8 100 - 120/277V

Specifications subject to change without notice.

Photometrics

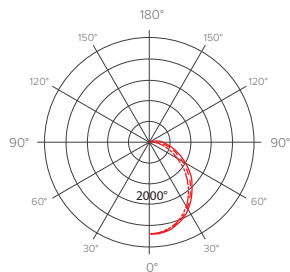

Zip 4 40




CANDLE POWER SUMMARY

ALONG	22.5	45	67.5	ACROSS	OUTPUT LUMENS	ANGLE	ZONE	LUMENS	% LAMP	% LUMINAIRE
1575	1575	1575	1575	1575		0	0 - 30	1200	27.07	27.07
1560	1568	1562	1570	1576	151	5	0 - 40	1930	43.55	43.55
1485	1498	1499	1507	1516	422	15	0 - 60	3296	74.36	74.36
1336	1350	1365	1380	1390	637	25	0 - 90	4291	96.80	96.80
1125	1144	1174	1198	1209	731	35	40 - 90	2361	53.26	53.26
877	903	952	990	1003	729	45	60 - 90	994	22.44	22.44
624	657	732	770	785	637	55	90 - 180	141	3.20	3.20
392	430	504	559	557	490	65	0 - 180	4434	100.00	100.00
199	240	317	373	391	325	75				
52	98	175	229	245	179	85				
0	51	122	172	187	83	90				
0	22	80	125	139	35	95				
0	3	31	60	71	14	105				
0	1	11	27	33	6	115				
0	0	5	13	16	2	125				
0	0	2	6	7	1	135				
0	0	0	3	3	0	145				
0	0	0	0	0	0	155				
0	0	0	0	0	0	165				
0	0	0	0	0		175				
0	0	0	0	0		180				

ELECTRICAL CONSUMPTION

Input Voltage: 120 VRMS
 Input Voltage: 0.328 ARMS
 Input Wattage: 38.92
 Power Factor: 0.989

Dimensions

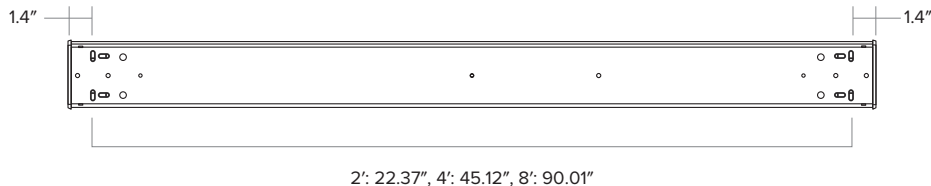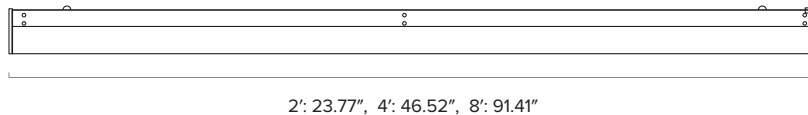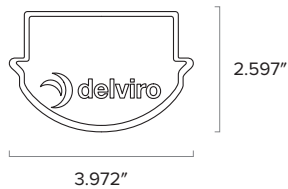

Specifications subject to change without notice.