


10YR
WARRANTY

Date: _____ Fixture: _____

QTY: _____ Project: _____



Zip Square

Linear Luminaire

LED Luminaire. Square profile. 2', 4', and 8' length options. High impact frosted acrylic lens. Suspended and wall mounting options. Screw in LED pan single ground screw for easy installation. Enclosed lens prevents dust, insects and other debris into the lamp compartment. Dry and Damp rated. DLC and cULus listed. 10 Year Warranty.

Ordering Options

MODEL	LENGTH	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
Zip	2	2: 15, 20, 30	3K 3000K	U 120/277V	FR Frosted	WH White	V V Hooks
	4	4: 15, 20, 30, 40, 60, 80, 100	35K 3500K	H 347V	CL Clear		FM Flush Mount
	8	8: 40, 60, 80, 100, 120	4K 4000K 5K 5000K				

ZIP						WH	
-----	--	--	--	--	--	----	--

WIRING	ACCESSORIES	TYPE	PLUG OPTIONS
BFC Black Flexible Cord WFC White Flexible Cord IN Internal	N None OCC Occupancy Sensor (on/off) UOCC Ultrasonic BLD Sensor BLD Bi Level Dimming (100%/10%) - Programmable DELBLD 5 Min 50% Delviro Sensor EMBAT Emergency Battery 10kV 10kV Surge Protection	SQ Square	N None *See Plug Options

		SQ	
--	--	----	--

SAMPLE: ZIP - 4 - 60 - 4K - U - FR - WH - V - BFC - N - SQ - N

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug

L5-15P - 125V 15A Locking Plug

5-20P - 125V AC 20A T-Slot Plug

L5-20P - 125V 20A Locking Plug

6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15

L6-15P - 250V 15A Locking Plug

6-20P - 250V AC 20A Plug

L6-20P - 250V 20A Locking Plug

7-15P - 277V 15A 3W/2P NEMA 7-15 Plug

L7-15P - 277V 15A Locking Plug

7-20P - 277V AC 20A Plug

L7-20P - 277V 20A Locking Plug

24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20

L24-20P - 347V 20A Locking Plug

24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Specifications subject to change without notice.

Product Details

Specifications

Efficacy: 2': Up to 136 Lm/W | 4': Up to 140 Lm/W | 8': Up to 156 Lm/W

CRI: 86

Color Temperature: 3000K, 3500K, 4000K, 5000K

Lumen Maintenance: 200,000+ Life Hours (L70)

Voltage: 120/277V | 347V

Operating Temperature: -35°C to +45°C

Mounting

0-10V Dimming

Mounting

V Hook, Flush Mount

Accessories

Occupancy Sensor

Ultrasonic BLD sensor

Battery Backup

Bi Level Dimming

5 min 50% Sensor

Emergency Backup

10kV Surge Protection

Performance

Model	Input Watts	Lm/W	Delivered Lumens
Zip 2 15	13.65	134.5	1,836
Zip 2 20	22.1	135.1	2,999
Zip 2 30	30.67	135.7	4,161

Model	Input Watts	Lm/W	Delivered Lumens
Zip 4 15	15	140	1,766
Zip 4 20	20.3	140	2,885
Zip 4 30	29.8	140	4,003
Zip 4 40	41.6	140	5,378
Zip 4 60	59.7	140	8,272
Zip 4 80	79	140	11,060
Zip 4 100*	97.8	139	13,659




Note: Zip 4 100 - 120/277V

Model	Input Watts	Lm/W	Delivered Lumens
Zip 8 40	38	156	5,911
Zip 8 60	57	156	8,765
Zip 8 80	75	155	11,602
Zip 8 100*	99.2	155	15,400
Zip 8 120*	116	152	17,830

Note: Zip 8 100 - 120/277V

Specifications subject to change without notice.

Dimensions

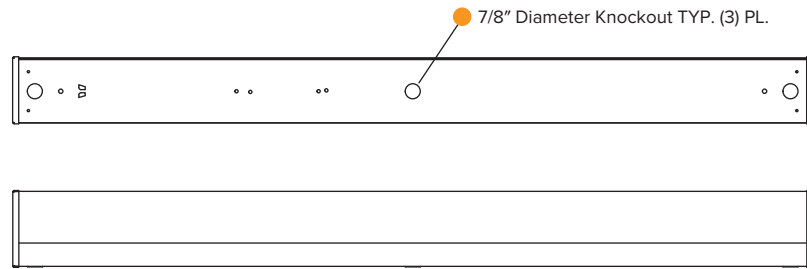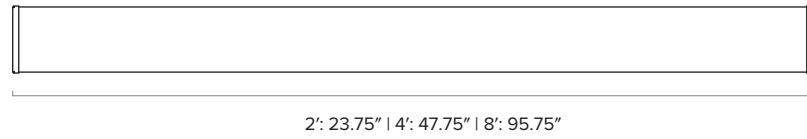

Specifications subject to change without notice.