




Date: _____ Fixture: _____

Qty: _____ Project: _____

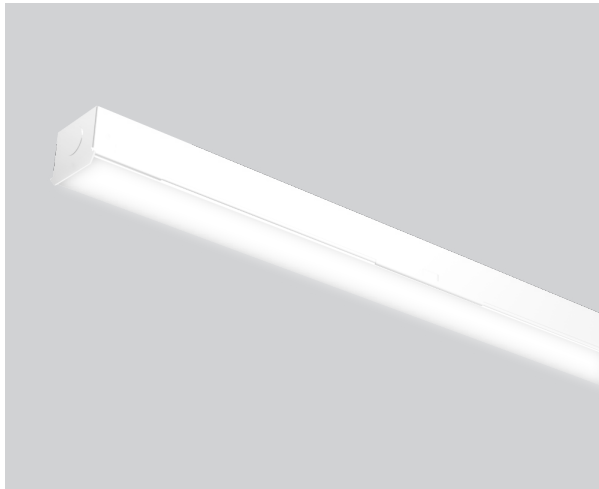

Zip Flat Linear Luminaire

LED Luminaire. 4' and 8' length options. 3' option available (consult factory). Steel construction. Frosted flat acrylic lens. Wall mountable option. Continuous run option. Screw in LED pan single ground screw for easy installation. Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment. Dry and Damp rated. DLC listed. cULus Listed. Designed and manufactured in North America. 10 Year Warranty.

Ordering Options

Model	Length	Color Temp	Voltage	Lens	Finish	Mounting
Zip 4	15, 20, 30, 40, 60	3K 3000K	U 120/277V	FRFL Frosted Flat	WH White	V V Hooks
Zip 8	40, 60, 80, 100, 120	35K 3500K	H 347V		CUBLK Custom Black	FM Flush Mount
CU 96"		4K 4000K				CR Continuous Run
		5K 5000K				
				FRFL		
Wiring		Accessories		Type	Plug Options	
BFC Black Flexible Cord		N None		FLT Flat	N None	See Plug Options Below
WFC White Flexible Cord		OCC Occupancy Sensor (on/off)				
		MICRO Microwave Sensor				
		EMBAT Emergency Battery				
		10kV 10kV Surge Protection		FLT		

Sample: ZIP-4-60-4K-U-FR-WH-V-BFC-N-FLT-N

Plug Options

5-15P 125V 15A T Slot Plug	6-20P 250V AC 20A Plug	24-20P 347V AV 20A 3W/2P Plug NEMA 24-20
L5-15P 125V 15A Locking Plug	L6-20P 250V 20A Locking Plug	L24-20P 347V 20A Locking Plug
5-20P 125V AC 20A T-Slot Plug	7-15P 277V 15A 3W/2P NEMA 7-15 Plug	24-15P 347V AC 15A 3W/2 Plug NEMA 24-15
L5-20P 125V 20A Locking Plug	L7-15P 277V 15A Locking Plug	
6-15P 250V AC 15A 3W/2P Plug NEMA 6-15	7-20P 277V AC 20A Plug	
L6-15P 250V 15A Locking Plug	L7-20P 277V 20A Locking Plug	

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Product Specifications

Efficacy:	Zip 4: Up to 140 Lm/W Zip 8: Up to 156 Lm/W
CRI:	86
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-35°C to +45°C -31°F to +113°F
Controls:	0-10V Dimming (347)
Mounting:	V Hook, Flush Mount, Continuous Run
Accessories:	Occupancy Sensor(on/off), Microwave Sensor, Emergency Battery, 10kV Surge Protection

Output Performance

Model	Input Watts	Lm/W	Delivered Lumens
Zip 4 15	15	140	1,766
Zip 4 20	20.3	140	2,885
Zip 4 30	29.8	140	4,003
Zip 4 40	41.6	140	5,378
Zip 4 60	59.7	140	8,272

Model	Input Watts	Lm/W	Delivered Lumens
Zip 8 40	38	156	5,911
Zip 8 60	57	156	8,765
Zip 8 80	75	155	11,602
Zip 8 100	99.2	155	15,400
Zip 8 120	116	152	17,830

Dimensions

