



Date: _____ Fixture: _____
QTY: _____ Project: _____



Zoom High Bay 16

Energy efficient LED luminaire. Suspended mounting. Architectural, retail, industrial, and commercial high bay applications. Aluminum construction. White finish. Custom finishes available. Aluminum and acrylic reflector options. DLC listed. cULus listed. 10 Year Warranty.

Ordering Options

MODEL	WATTS	COLOR TEMP	VOLTAGE	DOME TYPE	FINISH	MOUNTING	WIRING
Zoom	50	3K 3000K	U 120/277V	16AC 16 Clear Acrylic 16AL 16 Aluminum	WH White *CU Custom	H Hook	BFC Black Flexible Cord WFC White Flexible Cord
	70	35K 3500K	H 347/480V				
	90	4K 4000K					
	120	5K 5000K					
	150						
	180 195						

ZOOM						H	
------	--	--	--	--	--	---	--

ACCESSORIES	LENS	CRI
N None D Dimming Wire Accessible 10kV 10kV Surge Protection DIMOFF 0-10 1% Dim to off Driver	NL No Lens CLD Clear Diffused	ST Standard HD High Definition

--	--	--

SAMPLE: ZOOM - 150 - 4K - U - 16AC- WH - H - BFC - N - NL - ST

CU - Please consult factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Specifications subject to change without notice.

Product Details

Specifications

Efficacy: Up to 138 Lm/W
 CRI: 86 | 93 available
 Color Temperature: 3000K, 3500K, 4000K, 5000K
 Lumen Maintenance: 150,000+ Life Hours (L70)
 Voltage: 120/277V | 347/480V
 Operating Temperature: -20°C to +40°C

Controls

0 - 10V Dimming


Mounting

Hook

Output Performance

Model	Watts	Lm/W	Lumens
Zoom 50	50	125	6,250
Zoom 70	75.6	138.1	10,709
Zoom 90	87.4	132.9	11,617
Zoom 120	120.1	114.7	15,405
Zoom 150	152.3	122.9	18,722
Zoom 180	178.7	121.0	21,623
Zoom 195	199.8	119.7	23,911

Dimensions

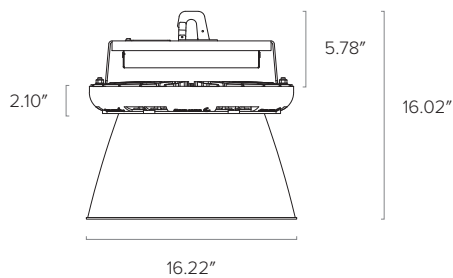

Specifications subject to change without notice.