



DATE: _____ FIXTURE: _____
 QTY: _____ PROJECT: _____



Zip Cloud Square

Suspended Direct | Direct Indirect

Contemporary LED luminaire. Square design. Pendant mounting. 2' x 2' size. Direct and Direct-Indirect distribution. Integrated driver. Multiple finishes. Designed and manufactured in North America. 10 Year Warranty.

Ordering Options

Model	Distribution	Watts	Color Temp	Voltage	Lens	Finish
Zip Cloud Square	Direct	20, 40, 60	3K 3000K	120V	FR Frosted	WH White
	Direct-Indirect	20 - 20	35K 3500K	277V		BLK Black
		20 - 40	4K 4000K	347V		CU Custom (<i>contact factory</i>)
		40 - 20	5K 5000K	Univ		
		40 - 40				
		60 - 20				
60 - 40						
ZipCloudSquare					FR	

Mounting	Wiring	Accessories	Canopy Finish
SUSD Suspended Direct	BFC 3 WIRE Black 3 Conductor Wire____	N None	WH White (<i>default</i>)
SUSD/I Suspended Direct-Indirect	BFC 5 WIRE Black 5 Conductor Wire____	OCC Occupany Sensor	CU Custom (<i>contact factory</i>)
	WFC 3 WIRE White 3 Conductor Wire____	DLS Daylight Sensor	
	WFC 5 WIRE White 5 Conductor Wire____	DLOCC Daylight Sensor w/Occupancy Sensor	
	GFC Grey Flexible Cord (<i>consult factory</i>)	DIMOFF 0-10 1% Dim to off Driver	
	N No Cord		
Note: OCC, DLS, DLOCC (<i>consult factory</i>)			

Sample: ZipCloudSquare - Direct - 20 - 4K - 120V - FR - WH - SUSD - BFC3WIRE - N - WH

Specifications

Efficacy:	100 Lm/W
CRI:	80
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120V, 277V, 347V, Univ
Controls:	0-10V Dimming
Mounting:	Aircraft Cable
Accessories:	0-10V 1% Dim to Off Driver, Occupancy Sensor, Daylight Sensor


Output Performance

Distribution	Watts	Delivered Lumens
Direct	20	2,000
	40	4,000
	60	6,000

Distribution	Watts	Delivered Lumens
Indirect	20 - 20	2,000 - 2,000
	20 - 40	2,000 - 4,000
	40 - 20	4,000 - 2,000
	40 - 40	4,000 - 4,000
	60 - 20	6,000 - 2,000
	60 - 40	6,000 - 4,000

Measurements

Suspended Direct

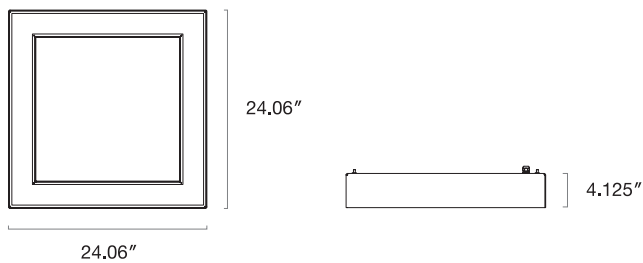

Suspended Direct - Indirect

