




Date: \_\_\_\_\_ Fixture: \_\_\_\_\_

QTY: \_\_\_\_\_ Project: \_\_\_\_\_

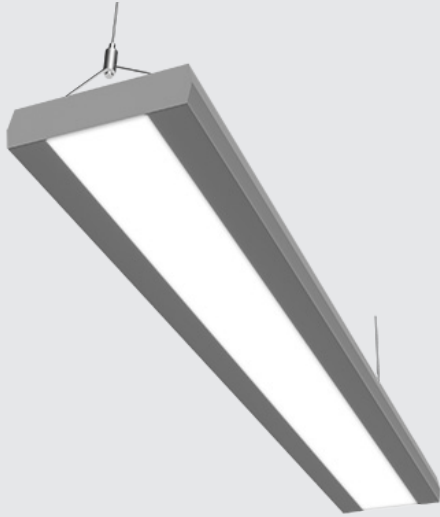

# Thinline Flat

## Suspended Direct | Direct-Indirect

Architectural luminaire. Contemporary design. 8" wide by 2" high. 2' to 8' length options. Direct and Direct-Indirect distribution. Multiple finishes. cULus Listed. Designed and manufactured in North America. 10 Year Warranty.

### Performance

<b>Model</b>	4000K	3500K	3000K
<b>Lm/W</b>	120 Lm/W	116 Lm/W	112 Lm/W



### Ordering Options

Model	Continuous Run	Direct Lumens/Ft	Indirect Lumens/Ft	CRI	Color Temp	Voltage
DTL FLT	CR _____ Min 2Ft - Available in 6in increments - Unibody up to 8Ft	D 250 D 500 D 750 D 1000 D _____ (custom up to 1200)	I 250 I 500 I 750 I 1000 I _____ (custom up to 1200)	80 90	27K 2700K 3K 3000K 35K 3500K 4K 4000K 5K 5000K BIOS BIOS (consult factory)	U 120/277V H 347V

DTL FLT						
---------	--	--	--	--	--	--

Direct Lens	Indirect Lens	Finish	Mounting	Driver	Controls
FR Frosted	FR Frosted CL Clear BATWING Batwing (contact factory)	GRY Grey WH White BLK Black CU Custom (consult factory)	AC Aircraft Cable (10Ft standard)	DIMOFF 0-10 1% DIMOFF LUTRON Lutron Ecosystem SR Philips SR DALI .1% ELDO (347 only 1-10 5%) ELDO	N None DMX SNS Philips SNS 300 w/BLD&Daylight Encelium CLM CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral

FR			AC		
----	--	--	----	--	--

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit 2 2 Circuits	N None 10kV 10kV Surge Protection EMBAT 6W 90 Min Battery	N None 5 WIRE 5 Wire 6 WIRE(NL) 6 Wire +GTD Generator Transfer Device	G Grey W White B Black C Clear	Length ____'	WH White BLK Black CU Custom


--	--	--	--	--	--

Sample Configuration: DTL FLT - CR8 - D500 - I500 - 90 - 4K - U - FR - FR - GRY - AC - DIMOFF - N - 1 - N - N - G - 8 - WH

**LED**


L90 > 70,000  
 Samsung 301 3 McAdam Binning  
 4000K 120 Lm/W  
 3500K 98%  
 3000K 96%  
 90 CRI 85%

**Dimensions**

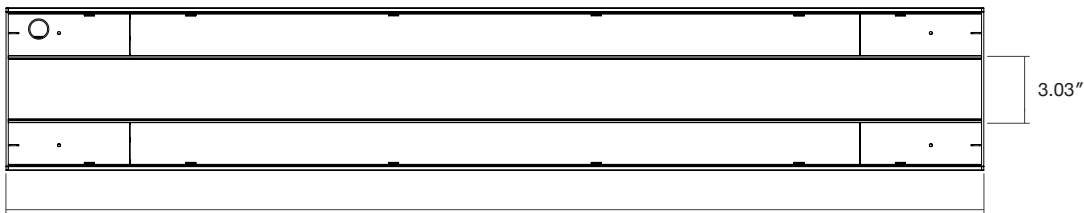


2': 24.2" 3': 36.2" 4': 48.2" 5': 60.2" 6': 72.2" 7': 84.2" 8': 96.2"  
 Actual Length = NOMINAL +.2"


Top

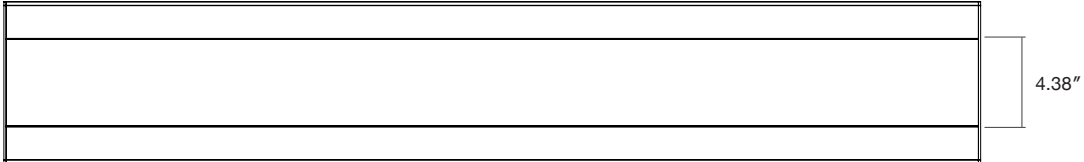

Bottom



## Mounting

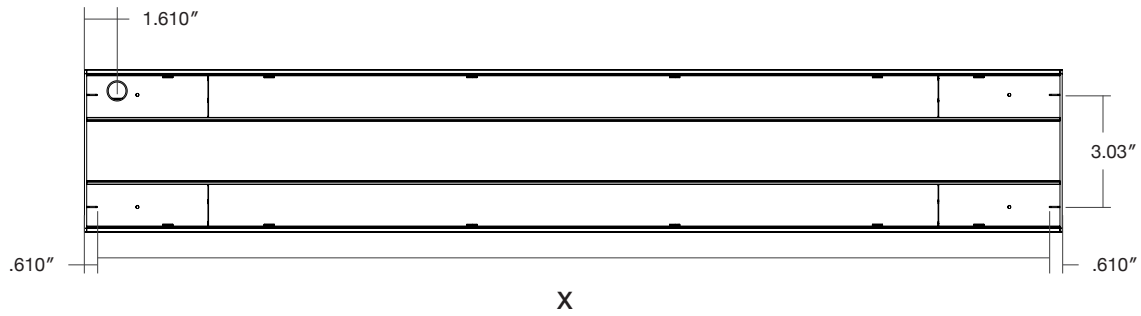

### Mounting Lengths - X

Models	Lengths
DTL FLT 2	23"
DTL FLT 3	35"
DTL FLT 4	47"
DTL FLT 5	59"
DTL FLT 6	71"
DTL FLT 7	83"
DTL FLT 8	95"