




Date: \_\_\_\_\_ Fixture: \_\_\_\_\_

QTY: \_\_\_\_\_ Project: \_\_\_\_\_

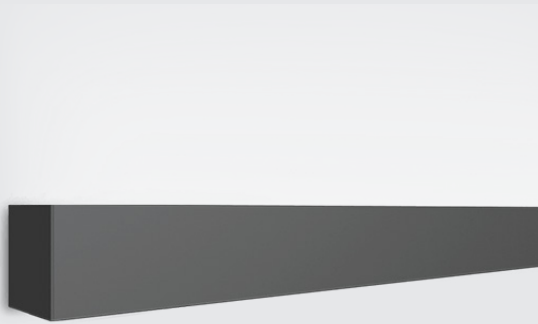

# Thinline

## Wall Mount Indirect

Cast End Caps with Light Block  
Multiple Lens and Customizations Available

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Wall mount applications. Indirect distribution. 2.25", 3.18", and 4.5" widths. Continuous runs available. L90>70K hours. cULus Listed.

Designed and manufactured in North America.  
10 Year Warranty.



Model Shown: Thinline 3.18

### Ordering Options

Model	Width	Continuous Run	Indirect Lm/ft	CRI	Color Temp	Voltage	Lens
DTL WM I	2.25	CR _____	I 250	80	27K 2700K	U 120/277V	FR Frosted
	3.18	Min 2Ft	I 500	90	3K 3000K	H 347V	ASY Asymmetric
	4.5	- Available in 6in increments - Unibody up to 8Ft	I 750 I 1000 I _____ (custom up to 1200)		35K 3500K 4K 4000K 5K 5000K BIOS BIOS (consult factory)		BATWING Batwing

DTL WM I

Finish	Mounting	Driver	Controls	Circuits
<b>GRY</b> Grey	<b>WM</b> Wall Mount Bracket	<b>DIMOFF</b> 0-10 1% DIMOFF	<b>N</b> None	<b>1</b> 1 Circuit
<b>WH</b> White	<b>12EX</b> 12" Extended Arm	<b>LUTRON</b> Lutron Ecosystem	<b>DMX</b>	
<b>BLK</b> Black		<b>SR</b> Philips SR	<b>SNS</b> Philips SNS 300 w/BLD & Daylight	
<b>CU</b> Custom (consult factory)		<b>DALI</b>	<b>CLM</b> Encelium CLM	
		<b>ELDO</b> .1% ELDO (347 only 1-10 5%)	<b>LG</b> LG Dongle	
			<b>BT</b> Bluetooth Mesh	
			<b>EN</b> Enlighted Integral	

1

Accessories	Wiring	Spotlight (4.5 model only)
<b>N</b> None	<b>N</b> None	<b>SPT#</b> Spotlight #
<b>10kV</b> 10kV Surge Protection	(will provide 5 leads from mounting plate)	<b>POS</b> Position: Start, Middle, End, Multiple
<b>EMBAT</b> 6W 90 Min Battery		

N SPT# POS

Sample Configuration: DTL WM I 4.5 - 8 - D250 - 80 - 4K - U - FR - GRY - WM - DIMOFF - N - 1 - N - N - 0 - 0


## LED

L90 > 70,000  
 Samsung 301 3 McAdam Binning  
 4000K 120 Lm/W  
 3500K 98%  
 3000K 96%  
 90 CRI 85%

## Performance

Model	Lm/W
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W

## Lens Options - Indirect


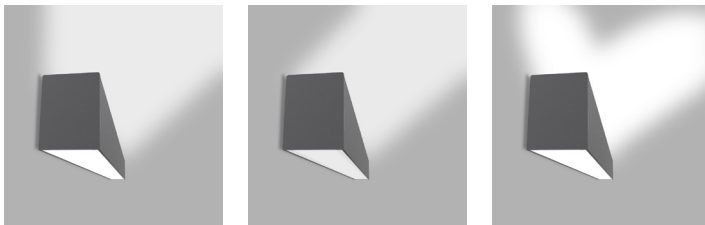


Flat

Asymmetric

Batwing


## Dimensions

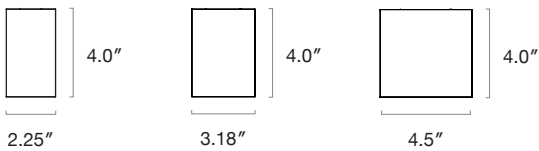



2': 24.2" 3': 36.2" 4': 48.2" 5': 60.2" 6': 72.2" 7': 84.2" 8': 96.2"

Actual Length = NOMINAL +.2"

### Mounting - Wall Mount Bracket

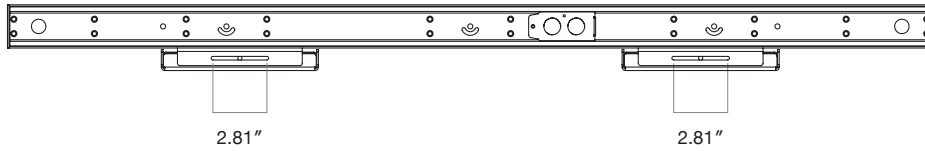


This is the central position of the wall mount bracket.  
It can be adjusted Left/Right by 1.4". Secure light fixture using #8-32 screws (2x).

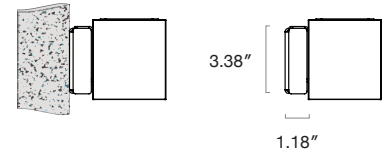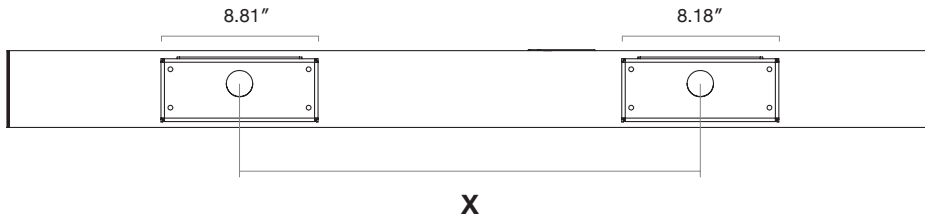

### Mounting Locations

Thinline Model	Mounting Reference
DTL 2	Centerline
DTL 3	
DTL 4	8" From Fixture Ends
DTL 5	
DTL 6	
DTL 7	Centerline & 8" From Fixture Ends
DTL 8	

### 12" Extended Arm

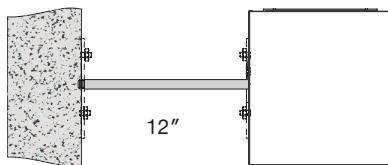

## Finish Options

### Standard Finishes



Grey  
RAL 7046  
Sandtex



White  
RAL 9003  
Sandtex



Black  
RAL 9004  
Sandtex

### Custom Finishes



Orange  
RAL 2009  
Sandtex



Green  
RAL 6010  
Sandtex



Blue  
RAL 5012  
Sandtex



Yellow  
RAL 1037  
Sandtex

Additional finishes - *Please contact factory*