




Date: \_\_\_\_\_ Fixture: \_\_\_\_\_

QTY: \_\_\_\_\_ Project: \_\_\_\_\_

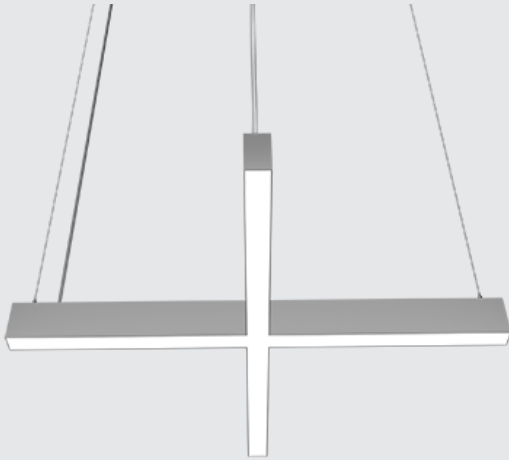

# Thinline X 90

## Suspended Direct-Indirect

Architectural luminaire. 90° X Shaped light fixture. Pendant mounting. Direct-Indirect distribution. Available in 3 sizes. 2.25" wide. Multiple finishes. Designed and manufactured in North America. 10 Year Warranty.



### Ordering Options

| Model    | Size                                            | Direct Lm/ft                   | Indirect Lm/ft                 | CRI | Color Temp | Voltage    | Direct Lens             |
|----------|-------------------------------------------------|--------------------------------|--------------------------------|-----|------------|------------|-------------------------|
| DTL X 90 | 4 x 2FT                                         | D 250                          | I 250                          | 80  | 27K 2700K  | U 120/277V | FR Frosted              |
|          | 4 x 3FT                                         | D 500                          | I 500                          | 90  | 3K 3000K   | H 347V     | FRREG Frosted Regressed |
|          | 4 x 4FT                                         | D 750                          | I 750                          |     | 35K 3500K  |            |                         |
|          |                                                 | D 1000                         | I 1000                         |     | 4K 4000K   |            |                         |
|          | Custom Sizes Available - Please Consult Factory | D _____<br>(custom up to 1200) | I _____<br>(custom up to 1200) |     | 5K 5000K   |            |                         |

|          |  |  |  |  |  |  |  |
|----------|--|--|--|--|--|--|--|
| DTL X 90 |  |  |  |  |  |  |  |
|----------|--|--|--|--|--|--|--|

| Indirect Lens                                | Finish           | Mounting                 | Driver                                  | Controls                                    | Circuits            |
|----------------------------------------------|------------------|--------------------------|-----------------------------------------|---------------------------------------------|---------------------|
| <b>FR</b> Frosted                            | <b>GRY</b> Grey  | <b>AC</b> Aircraft Cable | <b>DIMOFF</b> 0-10 1% DIMOFF            | <b>N</b> None                               | <b>1</b> 1 Circuit  |
| <b>BATWING</b> Batwing                       | <b>WH</b> White  | 10' Std                  | <b>LUTRON</b> Lutron Ecosystem          | <b>DMX</b>                                  | <b>2</b> 2 Circuits |
|                                              | <b>BLK</b> Black |                          | <b>SR</b> Philips SR                    | <b>SNS</b> Philips SNS 300 w/BLD & Daylight |                     |
| <i>Indirect Lens: Minimum size 4FT x 2FT</i> | <b>CU</b> Custom |                          | <b>DALI</b>                             | <b>CLM</b> Encelium CLM                     |                     |
|                                              |                  |                          | <b>ELDO</b> .1% ELDO (347 only 1-10 5%) | <b>LG</b> LG Dongle                         |                     |
|                                              |                  |                          |                                         | <b>BT</b> Bluetooth Mesh                    |                     |
|                                              |                  |                          |                                         | <b>EN</b> Enlighted Integral                |                     |

|  |  |           |  |  |  |
|--|--|-----------|--|--|--|
|  |  | <b>AC</b> |  |  |  |
|--|--|-----------|--|--|--|

| Accessories                       | Wiring                                  | Wire Color     | Wire Length             | Canopy Color     |
|-----------------------------------|-----------------------------------------|----------------|-------------------------|------------------|
| <b>N</b> None                     | <b>N</b> None                           | <b>G</b> Grey  | _____ FT (6FT Standard) | <b>WH</b> White  |
| <b>10kV</b> 10kV Surge Protection | <b>BFC3</b> 3 Wire Cord Black           | <b>W</b> White |                         | <b>BLK</b> Black |
| <b>EMBAT</b> 6W 90 Min Battery    | <b>WFC3</b> 3 Wire Cord White           | <b>B</b> Black |                         | <b>CU</b> Custom |
|                                   | <b>IN3</b> 3 Wire Internal              | <b>C</b> Clear |                         |                  |
|                                   | <b>IN5</b> 5 Wire Internal              |                |                         |                  |
|                                   | <b>CFC</b> Architectural Cable - 5 Wire |                |                         |                  |
|                                   | <b>BFC5</b> 5 Wire Cord Black           |                |                         |                  |
|                                   | <b>WFC5</b> 5 Wire Cord White           |                |                         |                  |

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|--|--|--|--|--|

Sample: DTL X 90 - 4FT x 2FT - D 500 - I 500 - 90 - 4K - U - FR - GRY - AC - DIMOFF - N - 1 - N - N - G - 6 - WH


## LED

L90 > 70,000  
 Samsung 301 3 McAdam Binning  
 4000K 120 Lm/W  
 3500K 98%  
 3000K 96%  
 90 CRI 85%

## Performance


| Model | Lm/W     |
|-------|----------|
| 4000K | 120 Lm/W |
| 3500K | 116 Lm/W |
| 3000K | 112 Lm/W |

## Dimensions

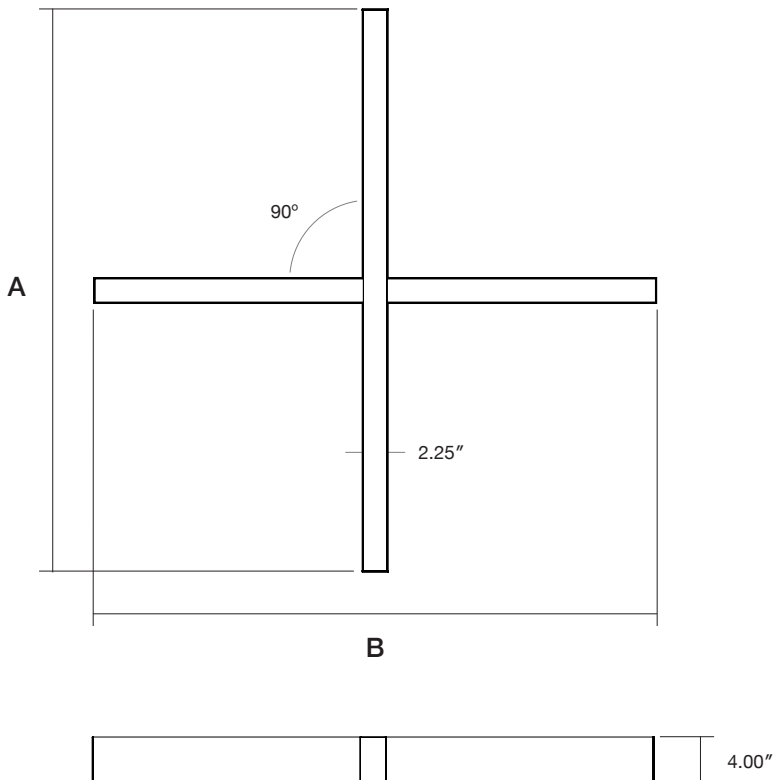

| MODEL   | A      | B      |
|---------|--------|--------|
| 4 x 2FT | 48.71" | 48.71" |
| 4 x 3FT | 72.71" | 72.71" |
| 4 x 4FT | 96.71" | 96.71" |

### Mounting

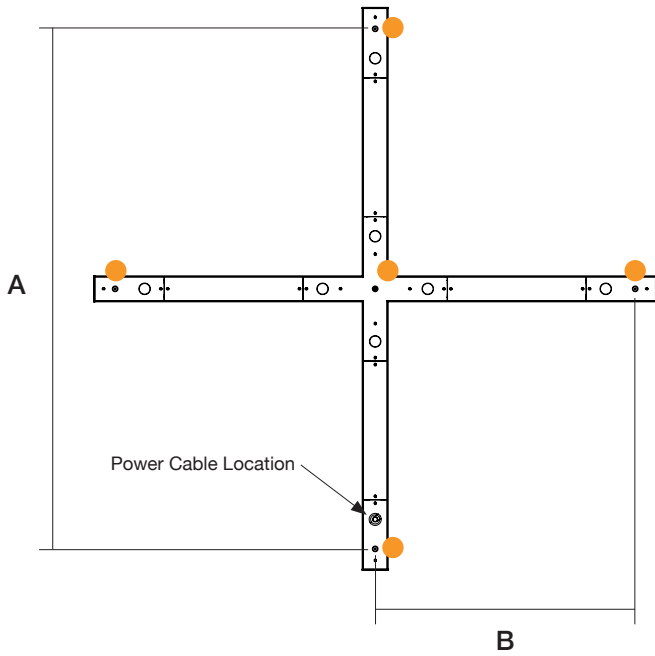

| MODEL   | A      | B      |
|---------|--------|--------|
| 4 x 2FT | 45.00" | 22.50" |
| 4 x 3FT | 69.00" | 34.50" |
| 4 x 4FT | 93.00" | 46.50" |

● Mounting Locations

### Finish Options

#### Standard Finishes



Grey  
RAL 7046  
Sandtex

White  
RAL 9003  
Sandtex

Black  
RAL 9004  
Sandtex

#### Custom Finishes



Orange  
RAL 2009  
Sandtex

Blue  
RAL 5012  
Sandtex

Yellow  
RAL 1037  
Sandtex

Green  
RAL 6010  
Sandtex

Additional finishes - Please contact factory