



Date: _____ Fixture: _____

QTY: _____ Project: _____



Airflex C High Bay

Commercial LED high bay. Steel construction with high gloss white finish. 2' and 4' lengths. Occupancy sensor, Bi-Level dimming, and 10kV surge protection available. Dry and damp rated.

DLC Listed. cULus listed.
Designed and manufactured in North America.
10 Year Warranty.

Ordering Options

Model	Length	Watts: 2Ft	Watts: 4Ft	CRI	Color Temp	Voltage	Lens	Finish
AIRFLEX C	2	80c	80c 240c	80	3K 3000K	U 120/277V	NL No Lens (standard)	WH White
	4	95c	95c 320c	90	35K 3500K	H 347V	FR Frosted	
		110c	110c 400c		4K 4000K		CL Clear (shatterproof polycarbonate)	
		135c	135c 480c		5K 5000K			
		160c	160c					
190c	190c							
AIRFLEX C							WH	

Mounting	Wiring	Accessories	Reflector	Aisle Optics	Packaging
V V Clips AC Aircraft Cable	BFC Black Flexible Cord WFC White Flexible Cord	N None OCC Occupancy Sensor (on/off) BLD Bi-Level Dimming (100%/10%) 10kV 10kV Surge Protection EMBAT Emergency Battery	N None 60AR 60° Aisle Reflector	N None Aisle Optics Aisle Optics	IB Individually Boxed SKE Skidded w/ End Caps

Sample Configuration: AIRFLEX C - 2 - 80c - 80 - 4K - U - FR - WH - V - BFC - OCC - N - N - IB

Note: For custom configurations please contact factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Features & Specifications

Efficacy:	2': Up to 181 Lm/W 4': Up to 195 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347/480V
Operating Temperature:	-20°C to +55°C -4°F to +131°F
Controls:	0-10V Dimming
Mounting:	V Clips, Aircraft Cable
Accessories:	Occupancy Sensor (on/off), Bi-Level Dimming (100%/10%), 10kV Surge Protection, Emergency Battery, 60° Aisle Reflector

Output Performance


Model	Watts	Lm/W	Delivered Lumens
Airflex 2 80c	76	181	13,756
Airflex 2 95c	90.5	178	16,122
Airflex 2 110c	105	178	18,690
Airflex 2 135c	128	176	22,528
Airflex 2 160c	154	174	26,830
Airflex 2 190c	183	174	31,861

Model	Watts	Lm/W	Delivered Lumens
Airflex 4 80c	74	195	14,551
Airflex 4 95c	90.5	178	16,122
Airflex 4 110c	105	181	18,909
Airflex 4 135c	128	181	23,206
Airflex 4 160c	154	174	26,830
Airflex 4 190c	183	174	31,861
Airflex 4 240c	234	166	39,110
Airflex 4 320c	315	164	51,473
Airflex 4 400c	394	163	64,090
Airflex 4 480c	473	162	76,705

Dimensions


Airflex 2

Models: 80c, 95c, 110c, 135c, 160c, 190c

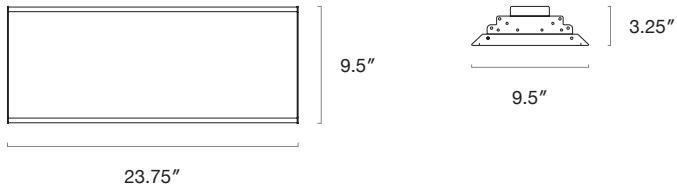


Airflex 4

Models: 80c 95c, 110c

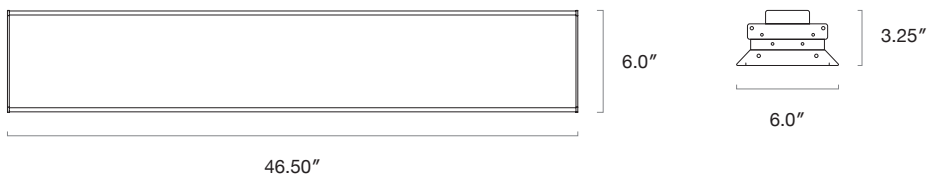

Airflex 4

Models: 135c, 160c, 190c, 240c, 320c

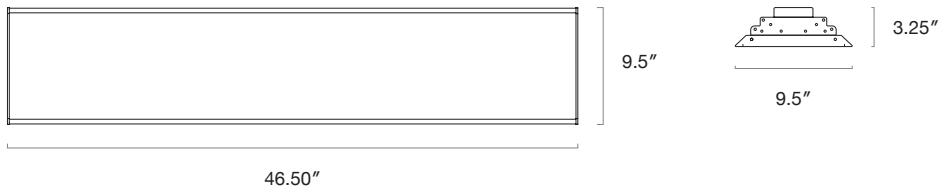

Airflex 4

Models: 400c, 480c

