



Date: _____ Fixture: _____

QTY: _____ Project: _____



Del Snap 2.0 Troffer Fixture

LED Troffer fixture. Steel construction. White finish. Diffused acrylic lens. Easy lay-in installation. General ceiling light applications.

cULus Listed

Designed and manufactured in North America.

5 Year Warranty.

Ordering Options

Model	Size	Watts	CRI	Color Temp	Voltage	Lens	Finish
DEL SNAP 2.0	1x4	15, 20, 25, 30, 35, 40, 50, 60	80	27K 2700K	U 120/277V H 347V	FR Frosted	WH White
	2x2	15, 20, 25, 30	90	3K 3000K			
	2x4	15, 20, 25, 30, 35, 40, 50, 60		35K 3500K			
	20x30	15, 20, 25, 30		4K 4000K			
	20x60	15, 20, 25, 30, 35, 40, 50, 60		5K 5000K			
DEL SNAP 2.0						FR	WH

Mounting

TBAR T-Bar
DTRK Drywall Trim Kit

Wiring

IN Internal (*standard*)
BFC Black Flexible Cord
WFC White Flexible Cord

Accessories

N None
OCC Occupancy Sensor (*on/off*) - (*please consult factory*)
10kV 10kV Surge Protection
EM Emergency Battery
WIFI Wifi Dimming
AH Air Handling Slots

Sample Configuration: DEL SNAP 2.0 - 1x4 - 30 - 80 - 4K - U - FR - WH - TBAR - IN - N

Note: For custom configurations please contact factory

Features & Specifications

Efficacy:	130 Lm/W
CRI:	80 90
Color Temperature:	2700K, 3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-40°C to +40°C -40°F to +104°F
Controls:	0-10V Dimming
Mounting:	T-Bar, Drywall Kit
Accessories:	Occupancy Sensor (on/off), 10kV Surge Protection, Emergency Battery, WIFI Dimming, Air Handling Slots

Output Performance

Model	Watts	Lm/W	Delivered Lumens	
Del Snap 1x4	15	130	1,950	
	20	130	2,600	
	25	130	3,250	
	30	130	3,900	
	35	130	4,550	
	40	130	5,200	
	50	130	6,500	
	60	130	7,800	
Model	Watts	Lm/W	Delivered Lumens	
Del Snap 2x2	15	130	1,950	
	20	130	2,600	
	25	130	3,250	
	30	130	3,900	
	Model	Watts	Lm/W	Delivered Lumens
	Del Snap 2x4	15	130	1,950
		20	130	2,600
		25	130	3,250
30		130	3,900	
35		130	4,550	
40		130	5,200	
50		130	6,500	
60		130	7,800	


Model	Watts	Lm/W	Delivered Lumens
Del Snap 20x30	15	130	1,950
	20	130	2,600
	25	130	3,250
	30	130	3,900
Model	Watts	Lm/W	Delivered Lumens
Del Snap 20x60	15	130	1,950
	20	130	2,600
	25	130	3,250
	30	130	3,900
	35	130	4,550
	40	130	5,200
	50	130	6,500
	60	130	7,800

Photometrics


Intensity Summary - Candelas

Angle	0	22.5	45	67.5	90
0	1720	1720	1720	1720	1720
5	1683	1691	1710	1734	1752
10	1659	1669	1692	1718	1735
15	1620	1626	1652	1682	1700
20	1560	1563	1595	1627	1648
25	1484	1486	1524	1561	1583
30	1391	1395	1440	1484	1507
35	1289	1293	1346	1397	1423
40	1175	1181	1243	1301	1332
45	1051	1060	1132	1201	1233
50	992	937	1020	1101	1136
55	794	814	909	1002	1043
60	665	689	797	911	958
65	535	568	687	818	859
70	409	454	599	695	729
75	285	348	467	549	579
80	173	243	325	381	399
85	80	120	162	182	190
90	8	9	13	17	20


Polar Candela Distribution

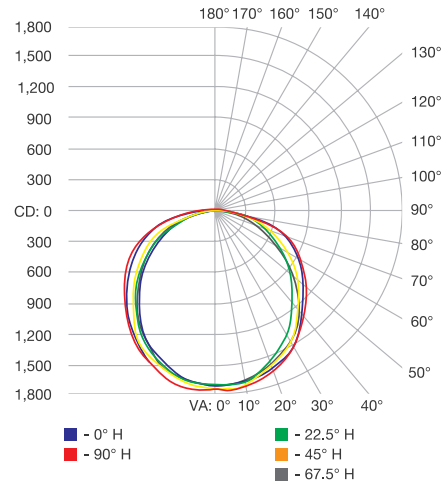


Del Snap 1x4

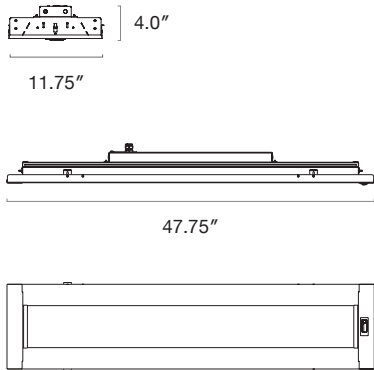



Del Snap 2x2

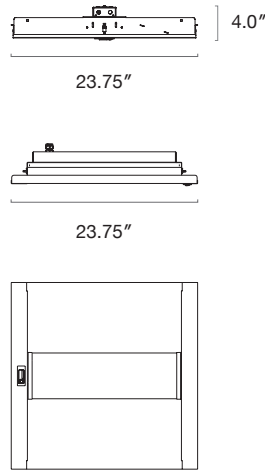

Del Snap 2x4

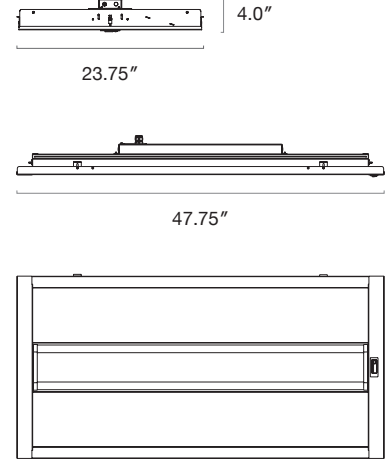

Del Snap 20x30



Del Snap 20x60

