



Date: _____ Fixture: _____

QTY: _____ Project: _____



Del Snap Metric 2.0 Troffer Fixture

LED Metric Troffer fixture. Steel construction. White finish. Diffused acrylic lens. Easy lay-in installation. General ceiling light applications.

cULus Listed
Designed and manufactured in North America.
5 Year Warranty.

Ordering Options

Model	Size	Watts	CRI	Color Temp	Voltage	Lens	Finish
DEL SNAP METRIC 2.0	300x1200	15, 20, 25, 30, 35, 40, 50, 60	80	27K 2700K	U 120/277V H 347V	FR Frosted	WH White
	300x1500	15, 20, 25, 30, 35, 40, 50, 60	90	3K 3000K			
	500x500	15, 20, 25, 30		35K 3500K			
	500x1200	15, 20, 25, 30, 35, 40, 50, 60		4K 4000K			
	500x1500	15, 20, 25, 30, 35, 40, 50, 60		5K 5000K			
DEL SNAP Metric 2.0						FR	WH

Mounting	Wiring	Accessories
TBAR T-Bar	IN Internal (standard)	N None
DTRK Drywall Trim Kit	BFC Black Flexible Cord	OCC Occupancy Sensor (on/off) - (please consult factory)
	WFC White Flexible Cord	10kV 10kV Surge Protection
		EM Emergency Battery
		WIFI Wifi Dimming
		AH Air Handling Slots

Sample Configuration: DEL SNAP METRIC 2.0 - 1x4 - 30 - 80 - 4K - U - FR - WH - TBAR - IN - N

Note: For custom configurations please contact factory

Features & Specifications

Efficacy:	130 Lm/W
CRI:	80 90
Color Temperature:	2700K, 3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-40°C to +40°C -40°F to +104°F
Controls:	0-10V Dimming
Mounting:	T-Bar, Drywall Kit
Accessories:	Occupancy Sensor (on/off), 10kV Surge Protection, Emergency Battery, WIFI Dimming, Air Handling Slots

Output Performance


Model	Watts	Lm/W	Delivered Lumens	Model	Watts	Lm/W	Delivered Lumens
Del Snap 300x1200	15	130	1,950	Del Snap 500x1200	15	130	1,950
	20	130	2,600		20	130	2,600
	25	130	3,250		25	130	3,250
	30	130	3,900		30	130	3,900
	35	130	4,550		35	130	4,550
	40	130	5,200		40	130	5,200
	50	130	6,500		50	130	6,500
	60	130	7,800		60	130	7,800
Model	Watts	Lm/W	Delivered Lumens	Model	Watts	Lm/W	Delivered Lumens
Del Snap 300x1500	15	130	1,950	Del Snap 500x1500	15	130	1,950
	20	130	2,600		20	130	2,600
	25	130	3,250		25	130	3,250
	30	130	3,900		30	130	3,900
	35	130	4,550		35	130	4,550
	40	130	5,200		40	130	5,200
	50	130	6,500		50	130	6,500
	60	130	7,800		60	130	7,800
Model	Watts	Lm/W	Delivered Lumens				
Del Snap 500x500	15	130	1,950				
	20	130	2,600				
	25	130	3,250				
	30	130	3,900				

Photometrics

Intensity Summary - Candelas




Angle	0	22.5	45	67.5	90
0	1720	1720	1720	1720	1720
5	1683	1691	1710	1734	1752
10	1659	1669	1692	1718	1735
15	1620	1626	1652	1682	1700
20	1560	1563	1595	1627	1648
25	1484	1486	1524	1561	1583
30	1391	1395	1440	1484	1507
35	1289	1293	1346	1397	1423
40	1175	1181	1243	1301	1332
45	1051	1060	1132	1201	1233
50	992	937	1020	1101	1136
55	794	814	909	1002	1043
60	665	689	797	911	958
65	535	568	687	818	859
70	409	454	599	695	729
75	285	348	467	549	579
80	173	243	325	381	399
85	80	120	162	182	190
90	8	9	13	17	20

Polar Candela Distribution



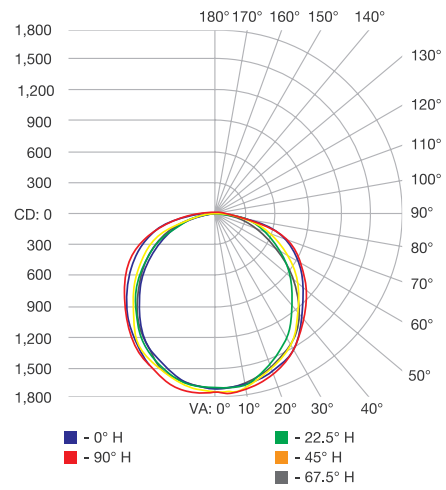


Dimensions



Del Snap 300x1200

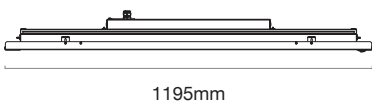




Del Snap 300x1500



Del Snap 500x500



Del Snap 500x1200



Del Snap 500x1500

