




Date: _____ Fixture: _____

QTY: _____ Project: _____

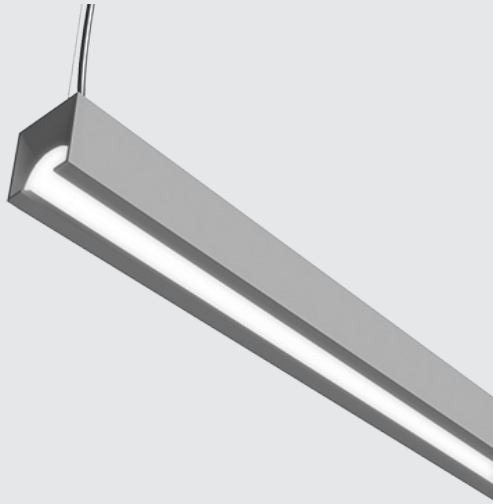

Thinline Arch Square

Suspended Direct | Direct-Indirect

Architectural luminaire. Contemporary design. Square profile. Aluminum housing. Pendant mounting. Direct and Direct-Indirect distribution. 4', 6', and 8' lengths. Frosted lens. Continuous run option. Standard Grey, white and black finishes. Custom finishes available. cULus Listed.

Designed and manufactured in North America.
5 Year Warranty.

Ordering Options

Model	Length	Direct Watts/Ft	Indirect Watts/Ft	CRI	Color Temp	Voltage	Lens	Finish
DTL	4	2.5	2.5	80	3K 3000K	U 120/277V	FR Frosted (direct, indirect)	GRY Grey
	6	3.5	3.5	90	35K 3500K	H 347V		WH White
	8	5	5		4K 4000K			BLK Black
		7.5			5K 5000K			CU Custom (consult factory)
		10						

DTL							FR	
-----	--	--	--	--	--	--	----	--

Mounting	Wiring	Accessories	Fixture Type
AC Aircraft Cable	BFC Black Flexible Cord WFC White Flexible Cord GFC Grey Flexible Cord 3 WIRE 3 Conductor Wire _____ 5 WIRE 5 Conductor Wire _____ N No Cord	N N 10kV 10kV Surge Protection EMBAT Emergency Battery DALI DMX	ARCH SQ

AC			ARCH SQ
----	--	--	---------

Sample Configuration: DTL - 4 - 2.5 - 2.5 - 4K - U - FR - GRY - AC - GFC - N - ARCH SQ

Features & Specifications

Efficacy:	75 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-20°C to +40°C -4°F to +104°F
Controls:	0-10V Dimming, Wireless (<i>consult factory</i>)
Mounting:	Aircraft Cable
Accessories:	DALI, DMX, 10kV Surge Protection, Emergency Battery

Output Performance

Distribution	Watts/FT	Delivered Lumens
Direct	2.5	187.5
	3.5	262.5
	5	375
	7.5	562.5
	10	750
Indirect	2.5	187.5
	3.5	262.5
	5	375

Dimensions

