




Date: _____ Fixture: _____

QTY: _____ Project: _____

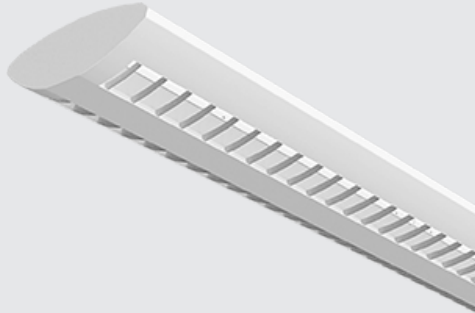

Thinline Ellipse

Suspended Direct-Indirect

Architectural luminaire. Contemporary design. Elliptical shape. One piece body. 4' and 8' length options. Continuous run options. cULus Listed.

Designed and manufactured in North America.
5 Year Warranty.

Ordering Options

| Model | Length | Watts/Ft | CRI | Color Temp | Voltage | Finish | Mounting |
|-------------|----------|----------|-----|------------|------------|--------------------------------|--|
| DTL ELLIPSE | 4 | 2.5 | 80 | 3K 3000K | U 120/277V | WH White | AC Aircraft Cable |
| | 6 | 3.5 | 90 | 35K 3500K | H 347V | CU Custom (consult factory) | ST Stem (please specify length: 3', 4', 6', 8') |
| | GR _____ | 5 | | 4K 4000K | | | |
| | | 7.5 | | 5K 5000K | | | |
| | | 10 | | | | | |
| DTL ELLIPSE | | | | | | | |

| Wiring | Accessories | Distribution | Custom Length (DTLCR) |
|--|---|---|---|
| BFC Black Flexible Cord WFC White Flexible Cord 5 WIRE 5 Conductor Wire _____ | N None EMBAT Emergency Battery Backup DIMOFF 0-10 1% Dim to off Driver | DIRECT DIRECT-INDIRECT | Specify Length: 4' and 8' Segments |
| _____ | | | |

Sample Configuration: DTL ELLIPSE - 8 - 10 - 4K - U - WH - AC - BFC - N - DIRECT - 4


Features & Specifications

| | |
|-------------------------------|--|
| Efficacy: | 140 Lm/W |
| CRI: | 80 90 |
| Color Temperature: | 3000K, 3500K, 4000K, 5000K |
| Lumen Maintenance: | 200,000+ Life Hours (L70) |
| Voltage: | 120/277V 347V |
| Operating Temperature: | -20°C to +40°C -4°F to +104°F |
| Controls: | 0-10V Dimming |
| Mounting: | Aircraft Cable, Stem |
| Accessories: | Emergency Battery, 0-10 1% Dim to off Driver |



Performance

| Model | Watts |
|-------|----------|
| 4000K | 120 Lm/W |
| 3500K | 116 Lm/W |
| 3000K | 112 Lm/W |

Distribution


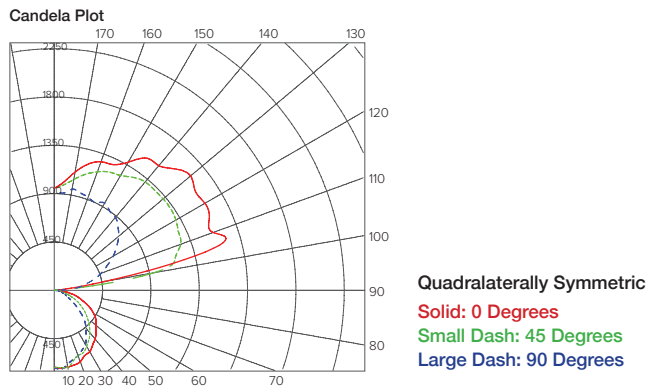


Dimensions

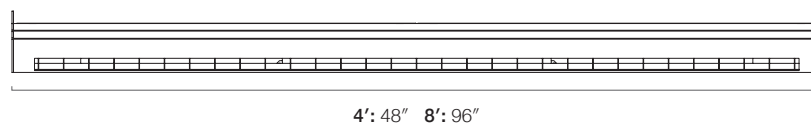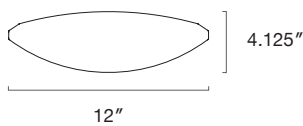


Mounting

Aircraft Cable

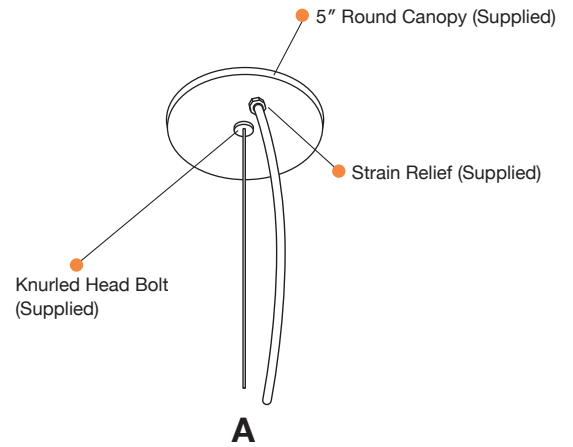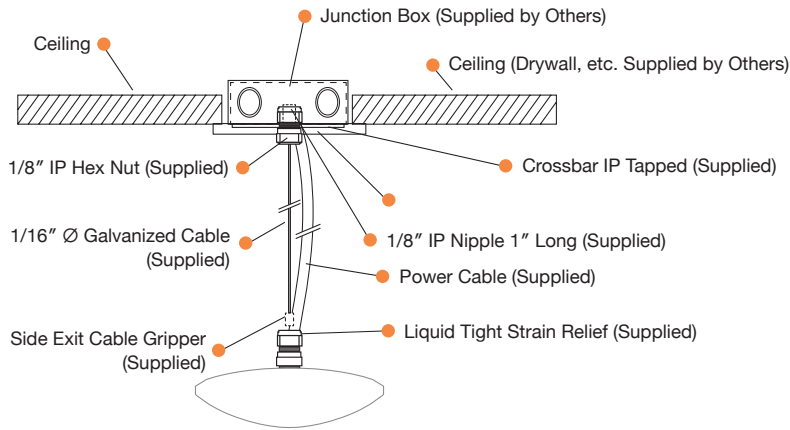

Stem

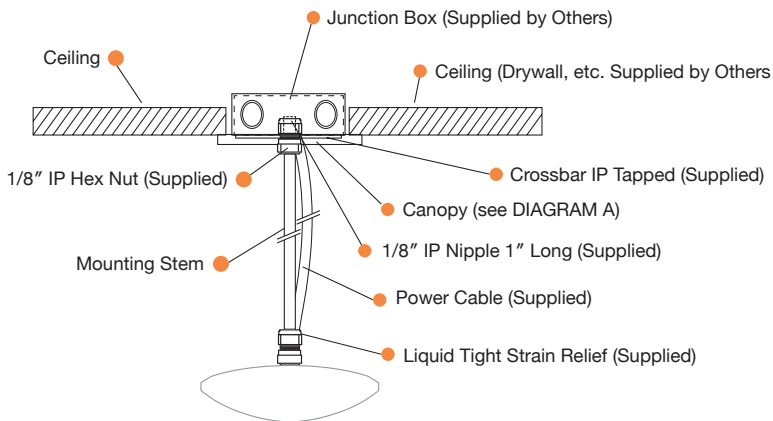

Mounting Stem 1/2" IPS (7/8" O.D)

Lengths: 3', 4', 6', 8' (threaded at both ends)

Continuous Run

Uses 4' or 8' segments

Please specify total run length

