




Date: _____ Fixture: _____

QTY: _____ Project: _____

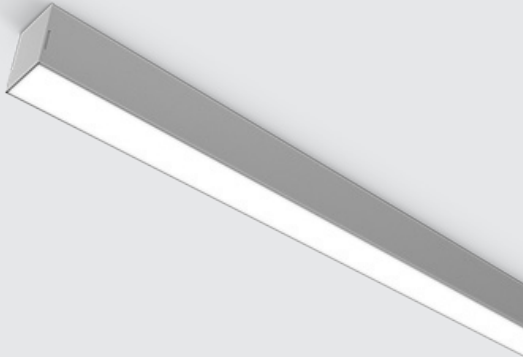

Thinline

Surface | Outdoor Canopy

Architectural luminaire. Aluminum extruded body. Surface mounting. Outdoor canopy applications. Continuous runs available. L90>70K hours. cULus Listed.

Designed and manufactured in North America.
5 Year Warranty.

Ordering Options

Model	Continuous Run	Direct Lm/ft	CRI	Color Temp	Voltage	Lens
DTL SU 3.18	CR _____	D 250	80	27K 2700K	U 120/277V	FR Frosted
	Min 2Ft	D 500	90	3K 3000K	H 347V	
	- Available in 6in increments	D 750		35K 3500K		
	- Unibody up to 8Ft	D 1000		4K 4000K		
		D _____ (custom up to 1200)		5K 5000K		

CR: Fixtures are individually installed in a linear continuous run. Segments are independently powered and factory sealed.

DTL SU 3.18						FR
-------------	--	--	--	--	--	----

Finish	Mounting	Driver	Controls (All Sensors Outside Fixture)	Accessories
WH White CU Custom <i>(consult factory)</i>	SU Surface <i>(ceiling bracket)</i> WM Wall Mount <i>(wall mount bracket)</i>	DIMOFF 0-10 1% DIMOFF LUTRON Lutron Ecosystem SR Philips SR DALI ELDO .1% ELDO <i>(347 only 1-10 5%)</i>	N None DMX SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral	N None 10kV 10kV Surge Protection EMBAT 6W 90 Min Battery

--	--	--	--	--

Wire	Wire Length	Fixture Type
5 Wire 5 Wire 6 Wire(NL) 6 Wire (NL) +GTD Generator Transfer Device N None	Length _____'	OUTDOOR CANOPY
		OUTDOOR CANOPY

Sample Configuration: DTL SU 3.18 - 8 - D250 - 80 - 4K - U - FR - GRAY - SU - DIMOFF - N - N - 5 WIRE - 6 - OUTDOOR CANOPY


LED

L90 > 70,000
 Samsung 301 3 McAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%


Performance

Model	Watts
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W


Lens



Frosted Flat




Measurements



4.0"


3.18"




2': 24.2" 3': 36.2" 4': 48.2" 5': 60.2" 6': 72.2" 7': 84.2" 8': 96.2"

Actual Length = NOMINAL +.2"

Mounting



Ceiling Mount Bracket



Wall Mount Bracket