




Date: \_\_\_\_\_ Fixture: \_\_\_\_\_

QTY: \_\_\_\_\_ Project: \_\_\_\_\_

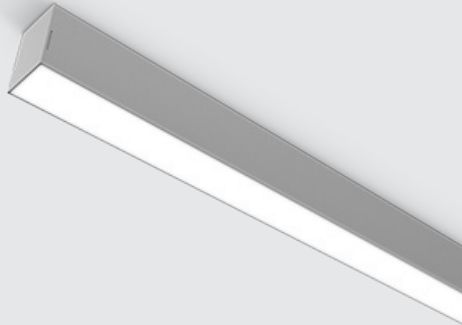

# Thinline

## Surface Direct

Cast End Caps with Light Block  
Multiple Lens and Customizations Available

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Surface mount applications. Direct distribution. 2.25", 3.18", and 4.5" widths. Continuous runs available. L90>70K hours. cULus Listed.

Designed and manufactured in North America.  
5 Year Warranty.

Model: Thinline 3.18

### Ordering Options

Model	Width	Continuous Run	Direct Lm/ft	CRI	Color Temp	Voltage	Lens
DTL SU	2.25	CR _____	<b>D 250</b>	<b>80</b>	<b>27K</b> 2700K	<b>U</b> 120/277V	<b>FR</b> Frosted
	3.18	<b>Min 2Ft</b>	<b>D 500</b>	<b>90</b>	<b>3K</b> 3000K	<b>H</b> 347V	<b>FRREG</b> Frosted Regressed
	4.5	- Available in 6in increments - Unibody up to 8Ft	<b>D 750</b> <b>D 1000</b> <b>D _____</b> (custom up to 1200)		<b>35K</b> 3500K <b>4K</b> 4000K <b>5K</b> 5000K		<b>ASY</b> Asymmetric <b>.5 FR DROP</b> .5" Frosted Drop Lens <b>1.5 FR DROP</b> 1.5" Frosted Drop Lens <b>LVR</b> Louver Lens
DTL SU							

Finish	Mounting	Driver	Controls	Circuits
<b>GRY</b> Grey	<b>S</b> Solid	<b>DIMOFF</b> 0-10 1% DIMOFF	<b>N</b> None	<b>1</b> 1 Circuit
<b>WH</b> White	<b>STB 9/16</b> 9/15 T-Bar	<b>LUTRON</b> Lutron Ecosystem	<b>DMX</b>	
<b>BLK</b> Black	<b>STB 15/16</b> 15/16 T-Bar	<b>SR</b> Philips SR	<b>SNS</b> Philips SNS 300 w/BLD & Daylight	
<b>CU</b> Custom (consult factory)		<b>DALI</b>	<b>CLM</b> Encellium CLM	
		<b>ELDO</b> .1% ELDO (347 only 1-10 5%)	<b>LG</b> LG Dongle	
			<b>BT</b> Bluetooth Mesh	
			<b>EN</b> Enlighted Integral	
				<b>1</b>

### Accessories

- N** None
- 10kV** 10kV Surge Protection
- EMBAT** 6W 90 Min Battery

Sample Configuration: DTL SU - 4.5 - 8 - D 250 - 80 - 4K - U - FR - GRY - S - DIMOFF - N - 1 - N


## LED

L90 > 70,000  
 Samsung 301 3 McAdam Binning  
 4000K 120 Lm/W  
 3500K 98%  
 3000K 96%  
 90 CRI 85%

## Performance

Model	Watts
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W

## Lens Options

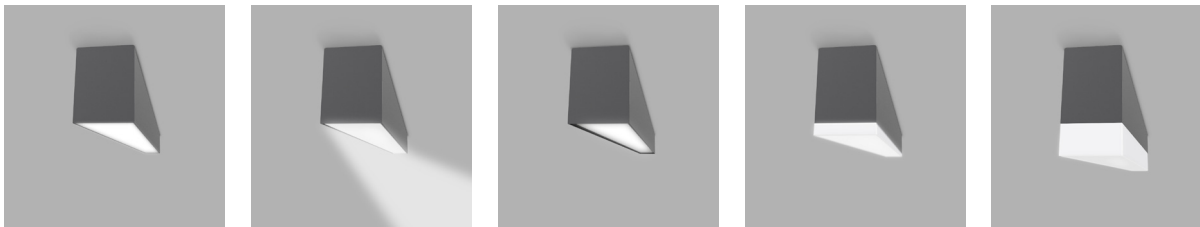

Flat


Asymmetric

0.25" Regressed

0.5" Drop Lens

1.5" Drop Lens


## Dimensions

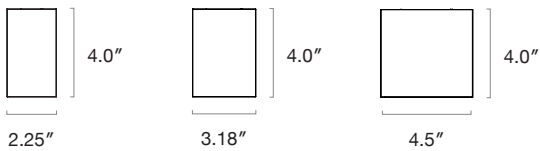


2': 24.2" 3': 36.2" 4': 48.2" 5': 60.2" 6': 72.2" 7': 84.2" 8': 96.2"

Actual Length = NOMINAL +.2"


## Mounting



**Solid Ceiling**  
1/4"-20 Thread Required (1)

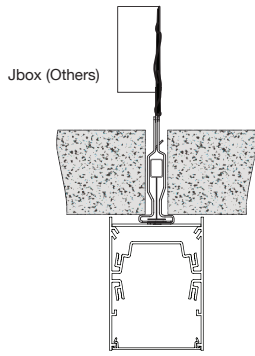

**T-Bar 9/16"**  
Aircraft Cable (ACY)

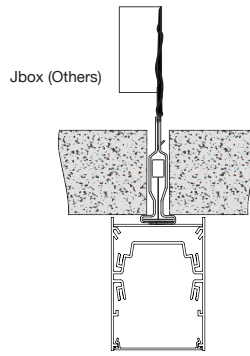

**T-Bar 15/16"**  
Aircraft Cable (ACY)

## Finish Options

### Standard Finishes



**Grey**  
RAL 7046  
Sandtex



**White**  
RAL 9003  
Sandtex



**Black**  
RAL 9004  
Sandtex

### Custom Finishes



**Orange**  
RAL 2009  
Sandtex



**Green**  
RAL 6010  
Sandtex



**Blue**  
RAL 5012  
Sandtex



**Yellow**  
RAL 1037  
Sandtex

Additional finishes - Please contact factory