



Date: _____ Fixture: _____

QTY: _____ Project: _____



VT4L

Vapor Tight - Weather Proof Luminaire

Weather proof luminaire. Polycarbonate shatterproof housing with stainless steel latches. Enclosed and gasketed body protects electronics from harsh weather elements. Moisture, vapor, chemical resistant, corrosion free, and dust protective. Frosted and clear lens options. NSF available.

DLC Premium. cULus listed.
5 Year Warranty.

Ordering Options

Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting	Wiring
VT4L	120	80	3K 3000K	U 120/277V	FR Frosted	GRY Grey	AC Aircraft Cable	BFC Black Flexible Cord
	160	90	35K 3500K	H 347V	CL Clear	WH White	V V Hooks	WFC White Flexible Cord
	190		4K 4000K					
	240		5K 5000K					

VT4L

Accessories

- N** None
- OCC** Occupancy Sensor (on/off)
- BLD** Bi-Level Dimming (100%/10%)
- WBD** Waterproof Bi-Level Dimming (100%/10%)
- WOC** Waterproof Occupancy Sensor (on/off)
- PC** Photo Control - (please consult factory)
- HT** High Temperature +55°C | +131°F - Specify if Dimming Required - (please consult factory)
- 10kV** 10kV Surge Protection
- EM** Emergency Battery

Sample Configuration: VT4L - 120 - 80 - 4K - U - FR - GRY - AC - BFC - N

Note: For custom configurations please contact factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.


Product Highlights

Efficacy:	Up to 159 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347/480V
Operating Temperature:	-40°C to +40°C -40°F to +104°F +55°C +131°F - available
Controls:	0-10V Dimming
Mounting:	Aircraft Cable, V Hooks
Accessories:	Occupancy Sensor(on/off), Waterproof Occupancy Sensor(on/off), Bi-Level Dimming (100%/1%), Waterproof Bi-Level Dimming(100%/1%), Photo Control, 10kV Surge Protection, High Temperature Option, Emergency Battery



Output Performance

Model	Watts	Lm/W	Delivered Lumens
VT4L 120	119	159	19,300
VT4L 160	158	159	25,700
VT4L 190	189	155.4	29,300
VT4L 240	240	155.4	37,296

Dimensions

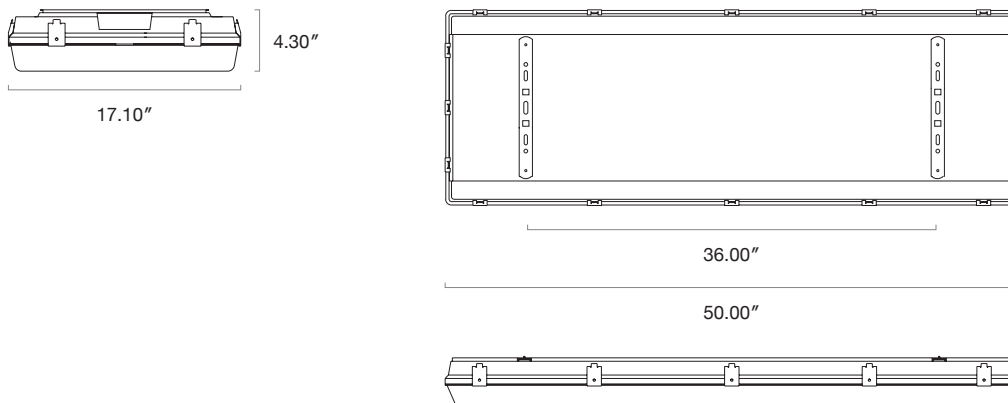

Mounting Bracket (Standard)

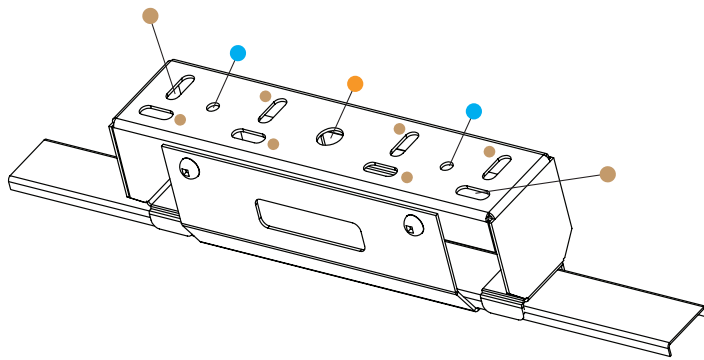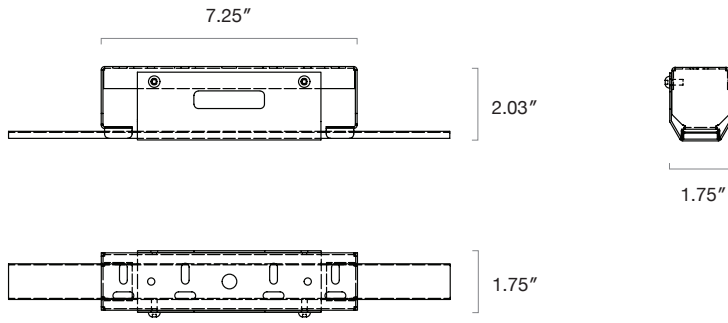

- Location for Aircraft Cable with gripper
- Location for Aircraft Cable w/paddles
- Location for V Hook (8)