



Date: \_\_\_\_\_ Fixture: \_\_\_\_\_

QTY: \_\_\_\_\_ Project: \_\_\_\_\_



## VTS

### Vapor Tight - Weather Proof Luminaire

Weather proof luminaire. 4' and 8' length options. Enclosed and gasketed body protects electronics from harsh weather elements. Polycarbonate shatterproof housing with stainless steel latches. Moisture, vapor, chemical resistant, corrosion free, and dust protective. Frosted and clear lens options. NSF available.

DLC Listed. cULus listed.  
5 Year Warranty.

### Ordering Options

Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting
VT4s	30, 40, 60, 80	80	3K 3000K 35K 3500K	U 120/277V H 347V	FR Frosted (VT4s Model Only) CL Clear	GRY Grey	AC Aircraft Cable V V Hooks
VT8s	40, 60, 80, 120	90	4K 4000K 5K 5000K				
						GRY	

#### Wiring

**BFC** Black Flexible Cord  
**WFC** White Flexible Cord

#### Accessories

**N** None  
**OCC** Occupancy Sensor (on/off)  
**BLD** Bi-Level Dimming (100%/10%)  
**WBD** Waterproof Bi-Level Dimming (100%/10%)  
**WOC** Waterproof Occupancy Sensor (on/off)  
**PC** Photo Control - Please Specify Voltage (120V, 208-277V, 347V, 480V)  
**HT** High Temperature +55°C | +131°F - Specify if Dimming Required (please consult factory)  
**10kV** 10kV Surge Protection  
**EM** Emergency Battery

Sample Configuration: VT4s - 60 - 80 - 4K - U - FR - GRY - AC - BFC - N

Note: For custom configurations please contact factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

## Product Highlights




<b>Efficacy:</b>	VTs 4: Up to 155 Lm/W   VTs 8: Up to 152 Lm/W
<b>CRI:</b>	80   90
<b>Color Temperature:</b>	3000K, 3500K, 4000K, 5000K
<b>Lumen Maintenance:</b>	200,000+ Life Hours (L70)
<b>Voltage:</b>	120/277V   347/480V
<b>Operating Temperature:</b>	-40°C to +40°C   -40°F to +104°F +55°C   +131°F - available
<b>Controls:</b>	0-10V Dimming
<b>Mounting:</b>	Aircraft Cable, V Hooks
<b>Accessories:</b>	Occupancy Sensor(on/off), Waterproof Occupancy Sensor(on/off), Bi-Level Dimming (100%/1%), Waterproof Bi-Level Dimming(100%/1%), Photo Control, 10kV Surge Protection, High Temperature Option, Emergency Battery

## Output Performance

Model	Watts	Lm/W	Delivered Lumens
VT4s 30	29.4	155	4,650
VT4s 40	39.5	152	6,080
VT4s 60	59.6	150	9,000
VT4s 80	83.9	139	12,501
Model	Watts	Lm/W	Delivered Lumens
VT8s 40	37	150	5,550
VT8s 60	56	148	8,288
VT8s 80	79	152	12,160
VT8s 120	115	150	18,000

## Dimensions

### VT4s

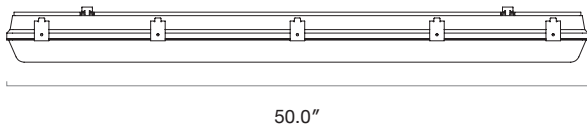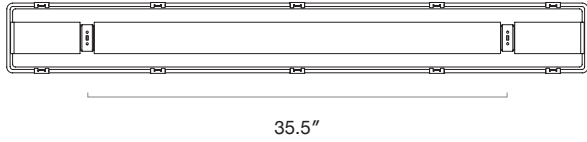

### VT8s

