




Date: _____ Fixture: _____
QTY: _____ Project: _____

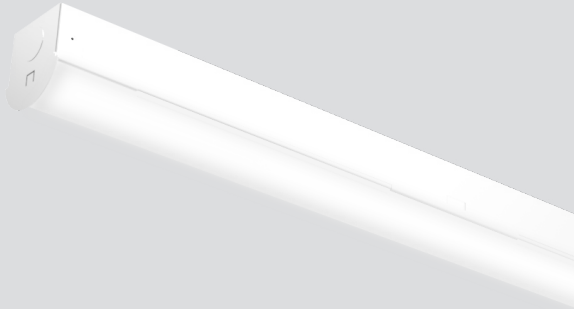

Zip Eco Linear Luminaire

LED linear. 2', 4, and 8' length options. High impact acrylic lens. Wall mountable option. Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment. Dry and damp rated.

DLC Listed. cULus listed.
Designed and manufactured in North America.
5 Year Warranty.

Ordering Options

Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting
ZIP 2	15, 20, 30	80	3K 3000K	U 120/277V	FR Frosted	WH White	V V Hooks
ZIP 4	15, 20, 30, 40, 60, 80, 100	90	35K 3500K	H 347V			FM Flush Mount
ZIP 8	40, 60, 80, 100, 120, 160		4K 4000K 5K 5000K				CR Continuous Run

Wiring	Accessories	Type
BFC Black Flexible Cord	N None	ZIP ECO
WFC White Flexible Cord	OCC Occupancy Sensor (on/off)	
IN Internal	10kV 10kV Surge Protection	
	WG Wire Guard	
	RFL Reflector	
	EM Emergency Driver	

Sample Configuration: Zip - 8 - 60 - 90 - 4K - U - FR - WH - V - BFC - N - ZIP ECO

Note: For custom configurations please contact factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Product Specifications

Efficacy:	Zip 2: 140 Lm/W Zip 4: Up to 145 Lm/W Zip 8: Up to 146 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-35°C to +45°C -31°F to +113°F
Controls:	0-10V Dimming
Mounting:	V Hook, Surface Mount
Accessories:	Occupancy Sensor(on/off), Emergency Battery, 10kV Surge Protection, Reflector, Wire Guard


Output Performance

Model	Watts	Lm/W	Delivered Lumens
Zip 2 15	15	140	2,100
Zip 2 20	20	140	2,800
Zip 2 30	30	140	4,200


Model	Watts	Lm/W	Delivered Lumens
Zip 4 20	20	140	2,800
Zip 4 30	30	140	4,200
Zip 4 40	40	140	5,600
Zip 4 60	60	140	8,400

Model	Watts	Lm/W	Delivered Lumens
Zip 8 40	38	140	5,320
Zip 8 60	60	146	8,760
Zip 8 80	75	140	10,500
Zip 8 100	100	140	14,000
Zip 8 120	120	140	16,800
Zip 8 160	160	140	22,400



Dimensions

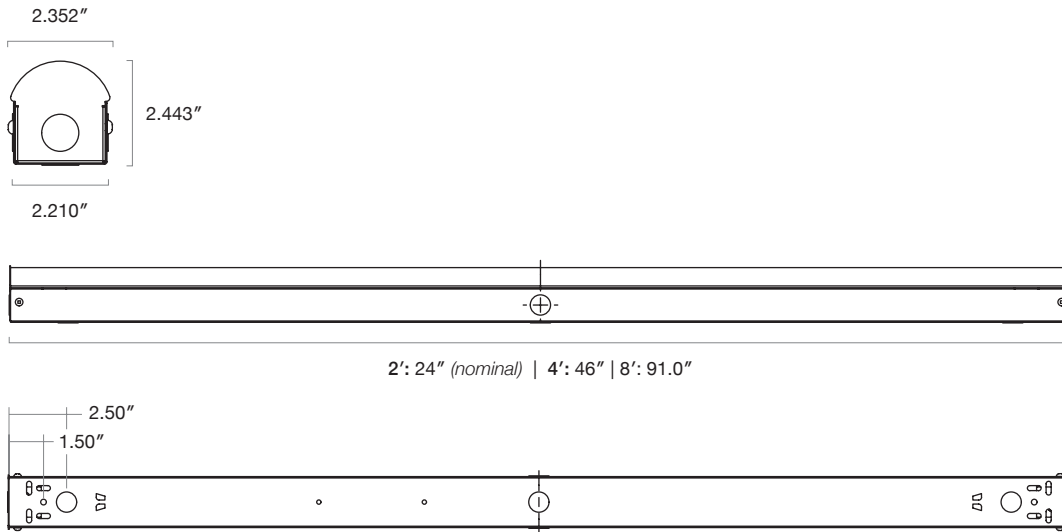

Wire Guard

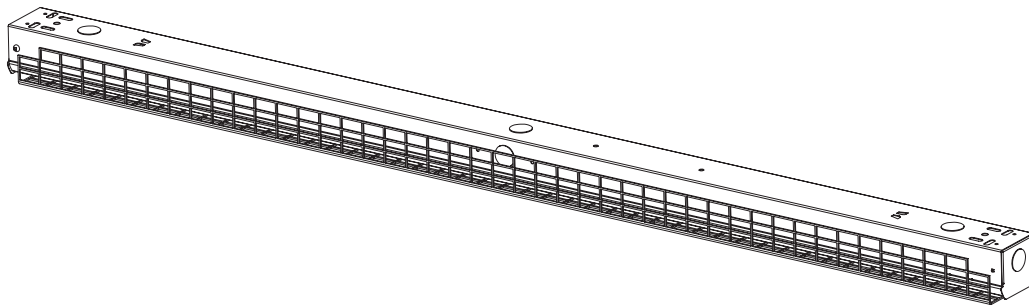


Reflector Option

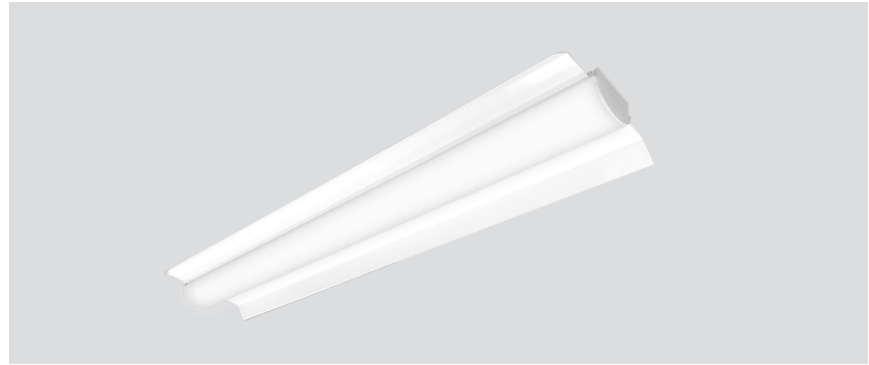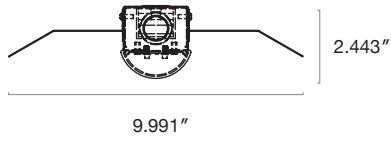

Note: Zip 2 - Please contact factory

Zip 4

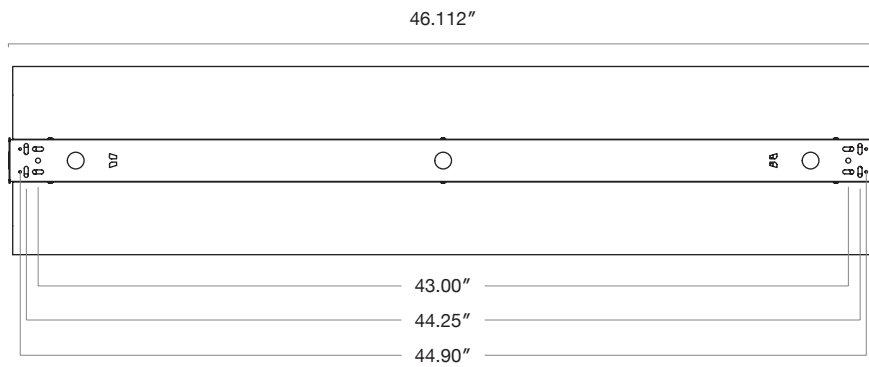

Zip 8

