




Date: _____ Fixture: _____
QTY: _____ Project: _____

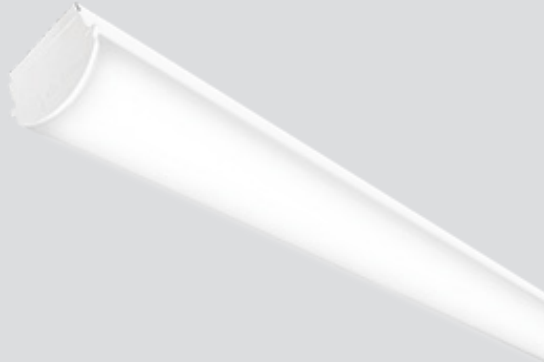

Zip

Linear Luminaire

LED linear. 2', 4, and 8' length options. Wall mountable option. Polycarbonate and acrylic lens options. Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment. Dry and damp rated.

DLC Listed. cULus listed.
Designed and manufactured in North America.
5 Year Warranty.

Ordering Options

Model	Length	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting
ZIP	2	15, 20, 30	80	3K 3000K	U 120/277V	FR Frosted	WH White	V V Hooks
	4	15, 20, 30, 40, 60, 80, 100	90	35K 3500K	H 347V	CL Clear		FM Flush Mount
	8	40, 60, 80, 100, 120,		4K 4000K 5K 5000K		PC Polycarbonate		CR Continuous Run

Wiring	Accessories
BFC Black Flexible Cord	N None
WFC White Flexible Cord	OCC Occupancy Sensor (on/off)
IN Internal	UOCC Ultrasonic BLD Sensor
	EM Emergency Battery
	10kV 10kV Surge Protection
	MICRO Integral Programmable Microwave Sensor

Sample Configuration: Zip - 8 - 60 - 80 - 4K - U - FR - WH - V - BFC - N

Note: For custom configurations please contact factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Product Specifications


Efficacy:	Zip 2: Up to 136 Lm/W Zip 4: Up to 140 Lm/W Zip 8: Up to 156 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-35°C to +45°C -31°F to +113°F
Controls:	0-10V Dimming
Mounting:	V Hook, Surface Mount
Accessories:	Occupancy Sensor(on/off), Ultrasonic BLD Sensor, Integral Programmable Microwave Sensor, Emergency Battery, 10kV Surge Protection

Output Performance

Model	Watts	Lm/W	Delivered Lumens	Model	Watts	Lm/W	Delivered Lumens
Zip 2 15	13.65	134.5	1,836	Zip 8 40	38	156	5,911
Zip 2 20	22.1	135.1	2,999	Zip 8 60	57	156	8,765
Zip 2 30	30.7	135.7	4,161	Zip 8 80	75	155	11,602
				* Zip 8 100	99.2	155	15,400
				Zip 8 120	116	152	17,830
				<i>Note: Zip 8 100 - 120/277V Only</i>			
Model	Watts	Lm/W	Delivered Lumens				
Zip 4 15	15	140	1,766				
Zip 4 20	20.3	140	2,885				
Zip 4 30	29.8	140	4,003				
Zip 4 40	41.6	140	5,378				
Zip 4 60	59.7	140	8,272				
Zip 4 80	79	140	11,060				
Zip 4 100	97.8	139	13,659				

Note: Zip 4 100 - 120/277V Only

Photometrics



Zip 4 40

Candle Power Summary

Along	22.5	45	67.5	Across	Output Lumens	Angle	Zone	Lumens	% Lamp	% Luminaire
1575	1575	1575	1575	1575		0	0-30	1200	27.07	27.07
1560	1568	1562	1570	1576	151	5	0-40	1930	43.55	43.55
1485	1498	1499	1507	1516	422	15	0-60	3296	74.36	74.36
1336	1350	1365	1380	1390	637	25	0-90	4291	96.80	96.80
1125	1144	1174	1198	1209	731	35	40-90	2361	53.26	52.26
877	903	952	990	1003	729	45	60-90	994	22.44	22.44
624	657	732	770	785	637	55	90-180	141	3.20	3.20
392	430	504	559	557	490	65	0-180	4434	100.00	100.00
199	240	317	373	391	325	75				
52	98	175	229	245	179	85				
0	51	122	172	187	83	90				
0	22	80	125	139	35	95				
0	3	31	60	71	14	105				
0	1	11	27	33	6	115				
0	0	5	13	16	2	125				
0	0	2	6	7	1	135				
0	0	0	3	3	0	145				
0	0	0	0	0	0	155				
0	0	0	0	0	0	165				
0	0	0	0	0	0	175				
0	0	0	0	0	0	180				

Electrical Consumption

Input Voltage: 120 VRMS
 Input Voltage: 0.328 ARMS
 Input Voltage: 38.92
 Input Voltage: 0.989

Dimensions

