



Date: _____ Fixture: _____

QTY: _____ Project: _____



Zoom Eco High Bay

Heavy duty construction. One piece die cast aluminum fixture provides maximum heat dissipation. Cooling fins added to increase the ambient temperature to 50°C standard. Built in heat sink.

Quick disconnected cable feature quickly separates the driver from the LED module for easy maintenance. Perfect lighting solution for retail, industrial, commercial, and architectural applications.

5 Year Warranty.

Ordering Options

Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting
ZOOM ECO	150 180 240	80 90	5K 5000K	U 120/277V	FL Flat Lens AL Aluminum Reflector AC Acrylic Reflector	WH White	H Hook PM Pendant
ZOOM ECO			5K	U		WH	

Cord Color

BFC Black Flexible Cord
WFC White Flexible Cord

Accessories

FG Flat Glass
CLF 16" Conical Lens Flat
CLD 16" Conical Lens Deep
WG Wire Guard

Sample Configurations: ZOOM ECO -150 - 80 - 5K- U - FL - WH - H - BFC - FG

Note:

Additional finishes: Please consult factory for additional finishes

Voltage: Please consult factory for additional voltages



Product Highlights

Efficacy:	Up to 136 Lm/W
CRI:	80 90
Color Temperature:	5000K
Lumen Maintenance:	75,000+ Life Hours (L70)
Voltage:	120/277V
Operating Temperature:	-40°C to +50°C -40°F to +122°F
Mounting:	Hook, Pendant
Accessories:	Flat Glass, Conical Lens, Deep Conical Lens, Wire Guard

Output Performance

Model	Watts	Lm/W	Delivered Lumens
Zoom Eco 150	150	132	19,800
Zoom Eco 180	180	136	24,480
Zoom Eco 240	240	129	30,960

Dimensions

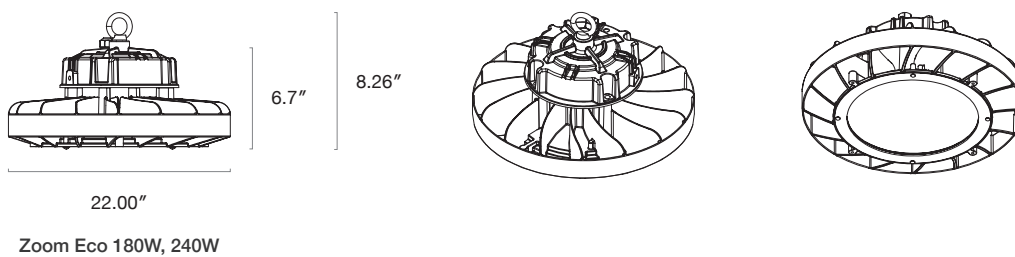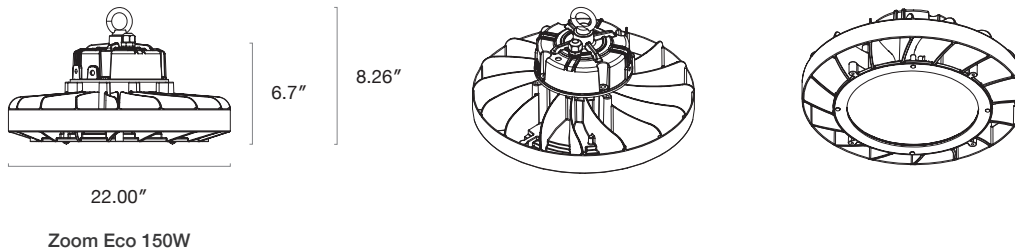

Lens Options



Acrylic Reflector



Aluminum Reflector



Flat Glass

Black Finish Shown - *Please consult factory*

Accessories



16" Flat Glass
w/ Clamp Band



16" Conical Lens
w/ Clamp Band



16" Deep - Conical Lens
w/ Clamp Band



16" Wire Guard