




Date: _____ Fixture: _____

QTY: _____ Project: _____

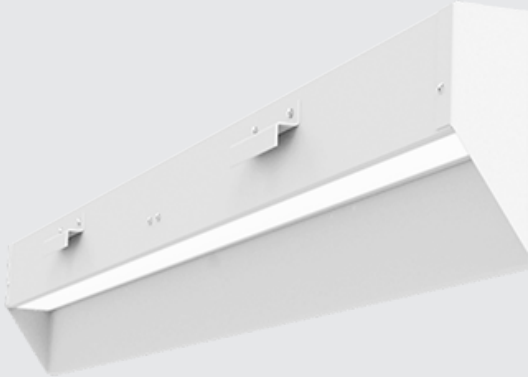

Thinline 2.25 Recessed Perimeter

Architectural luminaire. Recessed perimeter lighting. Aluminum housing. Continuous runs and lit corner options. cULus Listed.

Designed and manufactured in North America. 5 Year Warranty.

Ordering Options

| Model | Continuous Run | Direct Lm/ft | CRI | Color Temp | Voltage | Lens | Finish |
|--------|--|--|----------|---|----------------------|------------|----------|
| DTL PR | CR _____ (please specify lengths) Min 2Ft - Available in 6in increments - Unibody up to 8Ft | D 250 D 500 D 750 D 1000 D _____ (custom up to 1200) | 80 90 | 3K 3000K 35K 3500K 4K 4000K 5K 5000K | U 120/277V H 347V | FR Frosted | WH White |
| DTL PR | | | | | | FR | WH |

| Mounting | Wiring | Accessories | Lit Corner Inside | Lit Corner Outside |
|--|---|--|--------------------------------------|--------------------|
| T-Grid NF No Flange SPK Spackle Flange | BFC Black Flexible Cord WFC White Flexible Cord GFC Grey Flexible Cord 3 WIRE 3 Conductor Wire ___ 5 WIRE 5 Conductor Wire ___ N No Cord | N N WC Wireless Controls 10kV 10kV Surge Protection DIMOFF 0-10 1% Dim to off Driver DALI DMX | #QTY 1' x 1' - on center line | #QTY |
| | | | | |

Sample Configuration: DTL PR - 8 - D500 - 4K - U - FR - WH - SPK - BFC - N - 0 - 0


LED

L90 > 70,000
 Samsung 301 3 McAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%

Performance


| Model | Watts |
|-------|----------|
| 4000K | 120 Lm/W |
| 3500K | 116 Lm/W |
| 3000K | 112 Lm/W |

Dimensions

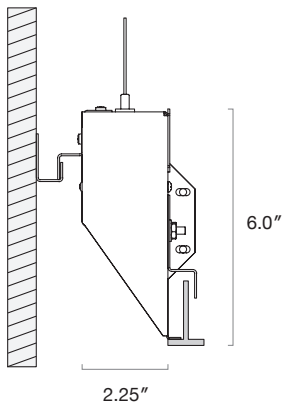


Mounting

T-Grid

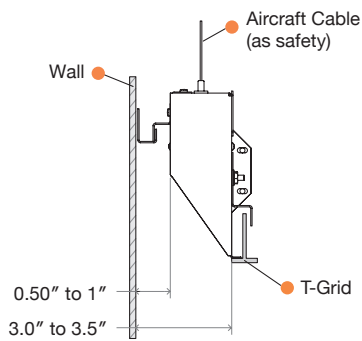

Spackle Flange

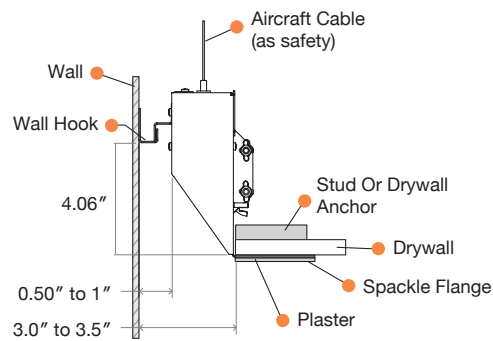

No Flange

