




Date: _____ Fixture: _____
 QTY: _____ Project: _____

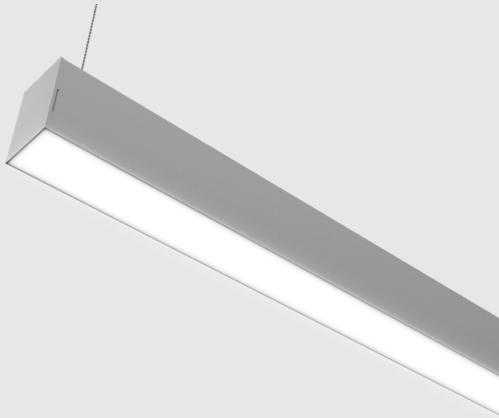

Thinline 3.18

Suspended | Outdoor Canopy

Architectural luminaire. Aluminum extruded body. Pendant mounting. Outdoor canopy applications. Continuous runs available. L90>70K hours. cULus Listed.

Designed and manufactured in North America.
 5 Year Warranty.

Ordering Options

Model	Continuous Run	Direct Lm/ft	CRI	Color Temp	Voltage	Lens
DTL SD 3.18	CR _____ Min 2Ft - Available in 6in increments - Unibody up to 8Ft	D 250 D 500 D 750 D 1000 D _____ (custom up to 1200)	80 90	27K 2700K 3K 3000K 35K 3500K 4K 4000K 5K 5000K	U 120/277V H 347V	FR Frosted

CR: Fixtures are individually installed in a linear continuous run. Segments are independently powered and factory sealed.

DTL SD 3.18						FR
-------------	--	--	--	--	--	----

Finish	Mounting	Driver	Controls (All Sensors Outside Fixture)	Accessories
WH White CU Custom (consult factory)	AC Aircraft Cable TR 10" Std Thread Rod _____	DIMOFF 0-10 1% DIMOFF LUTRON Lutron Ecosystem SR Philips SR DALI ELDO .1% ELDO (347 only 1-10 5%)	N None DMX SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral	N None 10kV 10kV Surge Protection EMBAT 6W 90 Min Battery

--	--	--	--	--

Wire	Wire Length	Wire Color	Fixture Type
5 Wire 5 Wire 6 Wire(NL) 6 Wire (NL) +GTD Generator Transfer Device N None	Length _____'	G Grey W White B Black C Clear	OUTDOOR CANOPY

			OUTDOOR CANOPY
--	--	--	----------------

Sample Configuration: DTL REC SPK 3.18 - 8 - D500 - 90 - 5K - U - FR - WH - DIMOFF - N - N - 5WIRE - 8 - Outdoor Canopy


LED

L90 > 70,000
 Samsung 301 3 McAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%


Performance

Model	Watts
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W



Lens



Frosted Flat



Measurements





2': 24.2" 3': 36.2" 4': 48.2" 5': 60.2" 6': 72.2" 7': 84.2" 8': 96.2"

Actual Length = NOMINAL +.2"

Mounting

Drywall

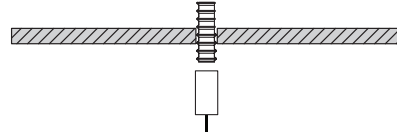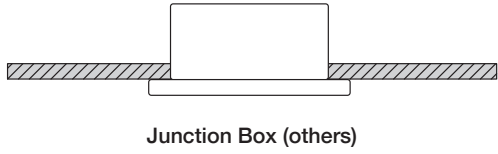

Anchor (others)

Aircraft Cable Coupler Supplied

1/4" - 20 Thread Required (1)

Stem

