




Date: _____ Fixture: _____
QTY: _____ Project: _____

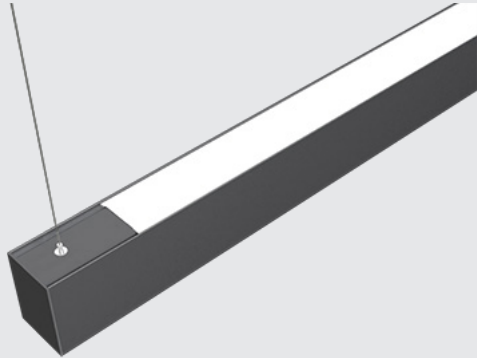

Thinline

Suspended Direct-Indirect

Cast End Caps with Light Block
Multiple Lens and Customizations Available

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Pendant mounting. Direct-Indirect distribution. 2.25", 3.18", and 4.5" widths. Continuous runs available. L90>70K hours. cULus Listed.

Designed and manufactured in North America.
10 Year Warranty.

Model Shown: Thinline 3.18

Ordering Options

Model	Width	Continuous Run	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage
DTL S DI	2.25	CR _____	D 250	I 250	80	27K 2700K	U 120/277V
	3.18	Min 2Ft	D 500	I 500	90	3K 3000K	H 347V
	4.5	- Available in 6in increments - Unibody up to 8Ft	D 750 D 1000 D _____ (custom up to 1200)	I 750 I 1000 I _____ (custom up to 1200)		35K 3500K 4K 4000K 5K 5000K	

Direct Lens		Indirect Lens		Finish		Mounting		Driver		Circuits	
FR	Frosted	FR	Frosted	GRY	Grey	AC	Aircraft Cable	DIMOFF	0-10 1% DIMOFF	1	1 Circuit
FRREG	Frosted Regressed	ASY	Asymmetric	WH	White	TR	10' Std	LUTRON	Lutron Ecosystem	2	2 Circuits
ASY	Asymmetric	BATWING	Batwing	BLK	Black	TB9/16	Threaded Rod _____	SR	Philips SR		
.5 FR DROP	.5" Frosted Drop Lens			CU	Custom	TB15/16	T-Bar 9/16 T-Bar 15/16	DALI			
1.5 FR DROP	1.5" Frosted Drop Lens							ELDO	.1% ELDO (347 only 1-10 5%)		
LVR	Louver Lens										

Accessories		Wiring		Wire Color		Wire Length		Canopy Color	
N	None	N	None	G	Grey	Length _____'		WH	White
10kV	10kV Surge Protection	5 WIRE	5 Wire	W	White			BLK	Black
EMBAT	6W 90 Min Battery	6 WIRE(NL)	6 Wire	B	Black			CU	Custom
		+GTD	Generator Transfer Device	C	Clear				

Sample Configuration: DTL S DI - 4.5 - CR8 - D 500 - I 500 - 90 - 4K - U - FR - GRY - AC - DIMOFF - N - 1 - N - N - G - WH

LED

L90 > 70,000
 Samsung 301 3 McAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%

Performance

Model	Lm/W
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W

Lens Options - Direct



Flat


Asymmetric

0.25" Regressed

0.5" Drop Lens

1.5" Drop Lens

Lens Options - Indirect

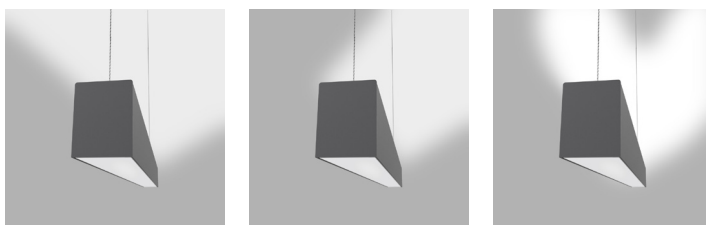


Flat

Asymmetric

Batwing

Dimensions

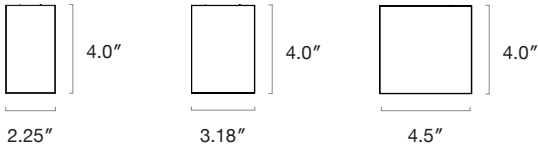


2': 24.2" 3': 36.2" 4': 48.2" 5': 60.2" 6': 72.2" 7': 84.2" 8': 96.2"

Actual Length = NOMINAL + .2"


Mounting

T-Bar

Jbox (others)

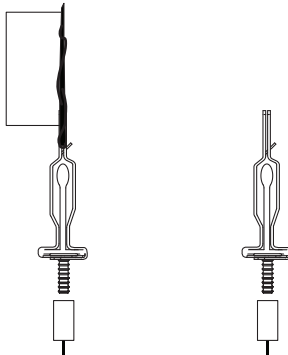

Aircraft Cable ACY



Ø 4.5"


Power Feed




Ø 2"

Non Power Feed

Drywall



Junction Box (others)




Anchor (others)


Aircraft Cable Coupler Supplies

1/4" - 20 Thread Required (1)

Stem

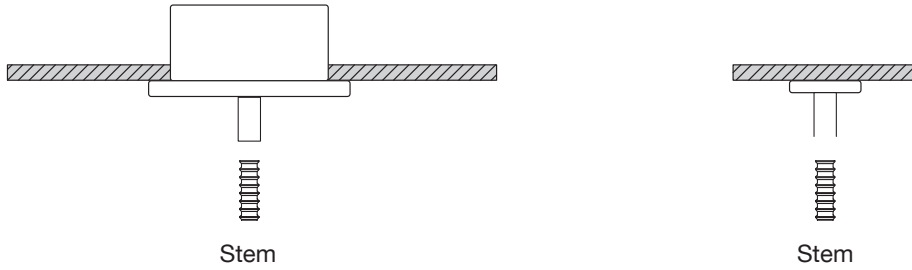

Mounting Locations

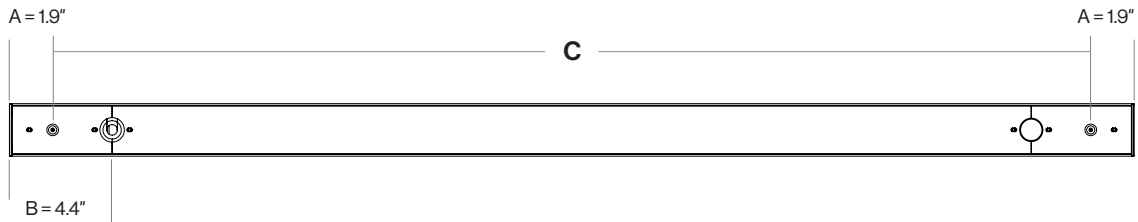

Thinline Model	Mounting Lengths - C
DTL 2	20.5"
DTL 3	32.5"
DTL 4	44.5"
DTL 5	56.5"
DTL 6	68.5"
DTL 7	80.5"
DTL 8	92.5"

Finish Options

Standard Finishes



Grey
RAL 7046
Sandtex



White
RAL 9003
Sandtex



Black
RAL 9004
Sandtex

Custom Finishes



Orange
RAL 2009
Sandtex



Green
RAL 6010
Sandtex



Blue
RAL 5012
Sandtex



Yellow
RAL 1037
Sandtex

Additional finishes - Please contact factory