




Date: _____ Fixture: _____

QTY: _____ Project: _____

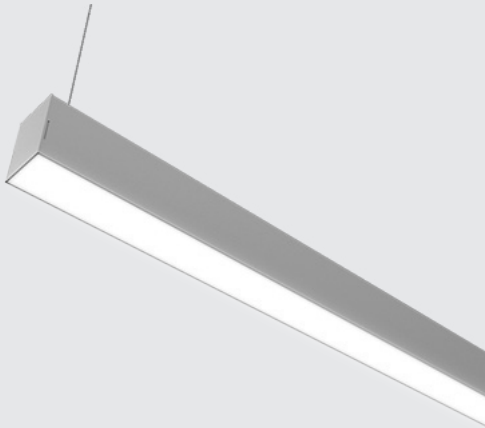

Model Shown: Thinline 3.18

Thinline

Suspended Direct

Cast End Caps with Light Block
Multiple Lens and Customizations Available

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Pendant mounting. Direct distribution. 2.25", 3.18", and 4.5" widths. Continuous runs available. L90>70K hours. cULus Listed.

Designed and manufactured in North America. 5 Year Warranty.

Ordering Options

Model	Width	Continuous Run	Direct Lm/ft	CRI	Color Temp	Voltage	Lens
DTL SD	2.25	CR _____	D 250	80	27K 2700K	U 120/277V	FR Frosted
	3.18	Min 2Ft	D 500	90	3K 3000K	H 347V	FRREG Frosted Regressed
	4.5	- Available in 6in increments - Unibody up to 8Ft	D 750 D 1000 D _____ (custom up to 1200)		35K 3500K 4K 4000K 5K 5000K		ASY Asymmetric .5 FR DROP .5" Frosted Drop Lens 1.5 FR DROP 1.5" Frosted Drop Lens LVR Louver Lens

DTL SD							
--------	--	--	--	--	--	--	--

Finish	Mounting	Driver	Controls	Circuits
GRY Grey	AC Aircraft Cable 10' Std	DIMOFF 0-10 1% DIMOFF	N None	1 1 Circuit
WH White	TR Threaded Rod _____	LUTRON Lutron Ecosystem	DMX	
BLK Black	TB9/16 T-Bar 9/16	SR Philips SR	SNS Philips SNS 300 w/BLD & Daylight	
CU Custom (consult factory)	TB15/16 T-Bar 15/16	DALI	CLM Encelium CLM	
		ELDO .1% ELDO (347 only 1-10 5%)	LG LG Dongle	
			BT Bluetooth Mesh	
			EN Enlighted Integral	

				1
--	--	--	--	---

Accessories	Wiring	Wire Color	Wire Length	Canopy Color
N None	N None	G Grey	Length _____'	WH White
10kV 10kV Surge Protection	5 WIRE 5 Wire	W White		BLK Black
EMBAT 6W 90 Min Battery	6 WIRE(NL) 6 Wire	B Black		CU Custom
	+GTD Generator Transfer Device	C Clear		

--	--	--	--	--

Sample Configuration: DTL SD - 4.5 - CR8 - D 500 - 90 - 4K - U - FR - GRY - AC - DIMOFF - N - 1 - N - N - G - WH

LED

L90 > 70,000
 Samsung 301 3 McAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%

Performance

Model	Watts
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W

Lens Options



Flat



Asymmetric

0.25" Regressed

0.5" Drop Lens

1.5" Drop Lens

Dimensions

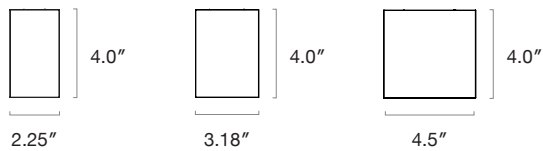


2': 24.2" 3': 36.2" 4': 48.2" 5': 60.2" 6': 72.2" 7': 84.2" 8': 96.2"


Actual Length = NOMINAL +.2"

Mounting



T-Bar

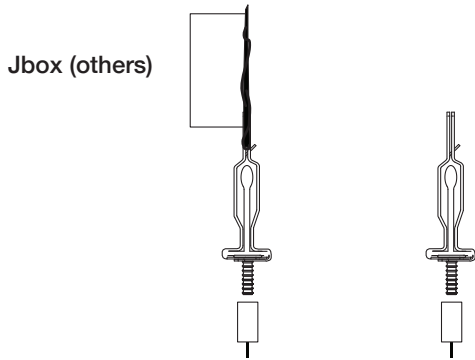



Aircraft Cable ACY

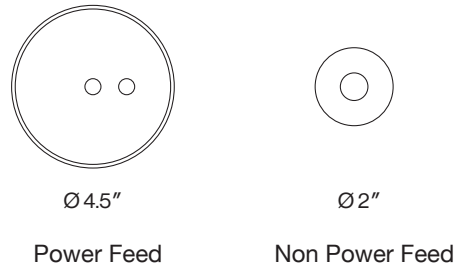


Drywall

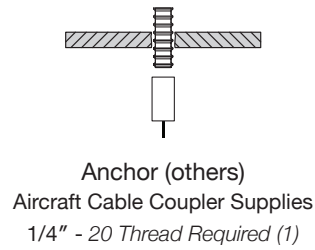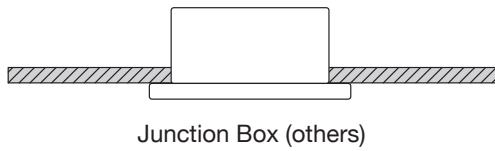

Stem

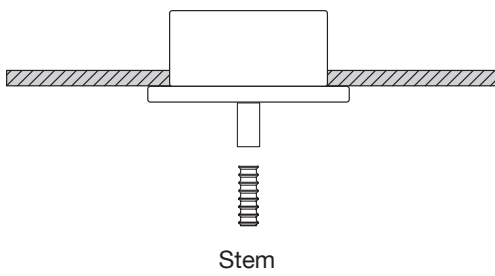

Mounting Locations

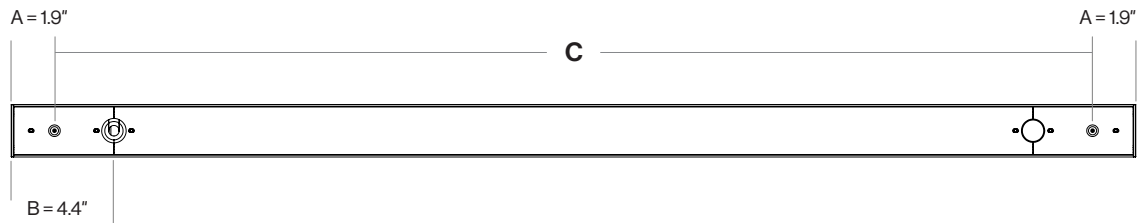

Thinline Model	Mounting Lengths - C
DTL 2	20.5"
DTL 3	32.5"
DTL 4	44.5"
DTL 5	56.5"
DTL 6	68.5"
DTL 7	80.5"
DTL 8	92.5"

Finish Options

Standard Finishes



Grey
RAL 7046
Sandtex



White
RAL 9003
Sandtex



Black
RAL 9004
Sandtex

Custom Finishes



Orange
RAL 2009
Sandtex



Green
RAL 6010
Sandtex



Blue
RAL 5012
Sandtex



Yellow
RAL 1037
Sandtex

Additional finishes - Please contact factory