




Date: _____ Fixture: _____

QTY: _____ Project: _____

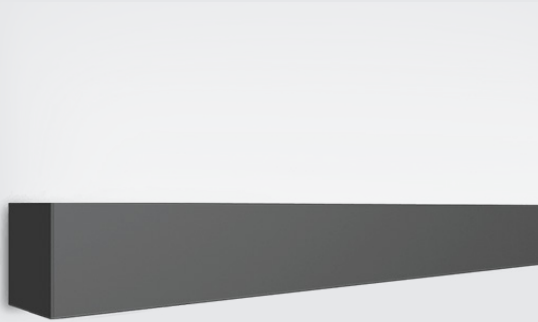

Thinline

Wall Mount Indirect

Cast End Caps with Light Block
Multiple Lens and Customizations Available

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Wall mount applications. Indirect distribution. 2.25", 3.18", and 4.5" widths. Continuous runs available. L90>70K hours. cULus Listed.

Designed and manufactured in North America.
5 Year Warranty.

Model Shown: Thinline 3.18

Ordering Options

Model	Width	Continuous Run	Indirect Lm/ft	CRI	Color Temp	Voltage	Lens
DTL WM I	2.25	CR _____	I 250	80	27K 2700K	U 120/277V	FR Frosted
	3.18	Min 2Ft	I 500	90	3K 3000K	H 347V	ASY Asymmetric
	4.5	- Available in 6in increments	I 750		35K 3500K		BATWING Batwing
		- Unibody up to 8Ft	I 1000	I _____ (custom up to 1200)		4K 4000K	
					5K 5000K		

Finish	Mounting	Driver	Controls	Circuits
GRY Grey	WM Wall Mount Bracket	DIMOFF 0-10 1% DIMOFF	N None	1 1 Circuit
WH White	12EX 12" Extended Arm	LUTRON Lutron Ecosystem	DMX	
BLK Black		SR Philips SR	SNS Philips SNS 300 w/BLD & Daylight	
CU Custom (consult factory)		DALI	CLM Encelium CLM	
		ELDO .1% ELDO (347 only 1-10 5%)	LG LG Dongle	
			BT Bluetooth Mesh	
			EN Enlighted Integral	

Accessories	Wiring
N None	N None
10kV 10kV Surge Protection	(will provide 5 leads from mounting plate)
EMBAT 6W 90 Min Battery	

Sample Configuration: DTL WM I - 4.5 - 8 - D 250 - 80 - 4K - U - FR - GRY - S - DIMOFF - N - 1 - N - N - 0 - 0


LED

L90 > 70,000
 Samsung 301 3 McAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%

Performance

Model	Watts
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W

Lens Options - Indirect


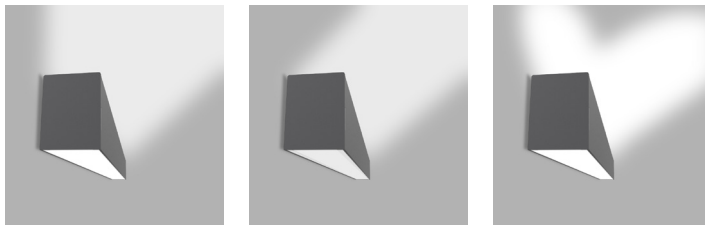


Flat

Asymmetric

Batwing


Dimensions

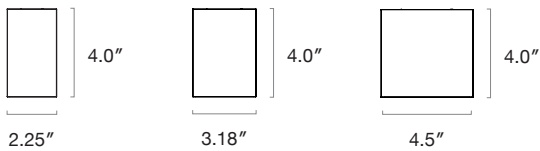



2': 24.2" 3': 36.2" 4': 48.2" 5': 60.2" 6': 72.2" 7': 84.2" 8': 96.2"

Actual Length = NOMINAL +.2"

Mounting - Wall Mount Bracket

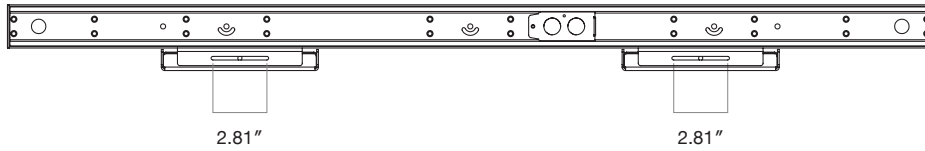


This is the central position of the wall mount bracket.
It can be adjusted Left/Right by 1.4". Secure light fixture using #8-32 screws (2x).

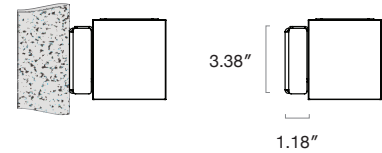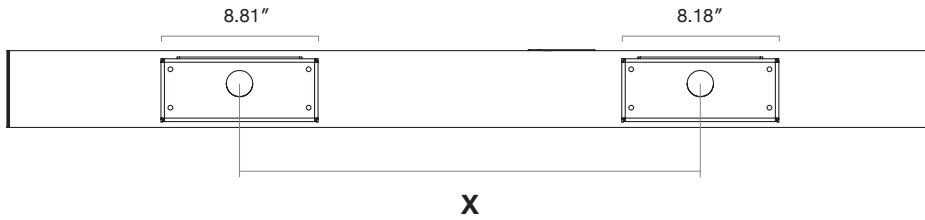

Mounting Locations

Thinline Model	Mounting Reference
DTL 2	Centerline
DTL 3	
DTL 4	8" From Fixture Ends
DTL 5	
DTL 6	
DTL 7	Centerline & 8" From Fixture Ends
DTL 8	

12" Extended Arm

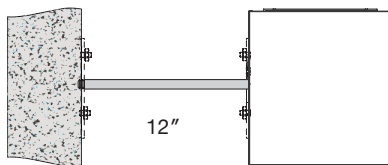

Finish Options

Standard Finishes



Grey
RAL 7046
Sandtex



White
RAL 9003
Sandtex



Black
RAL 9004
Sandtex

Custom Finishes



Orange
RAL 2009
Sandtex



Green
RAL 6010
Sandtex



Blue
RAL 5012
Sandtex



Yellow
RAL 1037
Sandtex

Additional finishes - *Please contact factory*