

Fixture: _____ QTY: _____ Project : _____

Thinline L 90

Suspended

Direct | Direct-Indirect

Architectural luminaire. 90° L Shaped fixture. Pendant mounting.
Direct and direct-indirect distribution options. Available in 3 sizes.
2.25" wide. Multiple finishes available.

cULus Listed

Designed and manufactured in North America.
5 Year Warranty.



Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Ordering Options

Sample Configuration: DTL L 90 - 2FT x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

| Model | Size | Direct Lm/ft | Indirect Lm/ft | CRI | Color Temp | Voltage | Direct Lens |
|----------|--|-----------------------------|-----------------------------|----------------------|----------------------|----------------------|-------------------------|
| DTL L 90 | 2FT x 2FT | D 250 | I 250 | 80 | 27K 2700K | U 120/277V | FR Frosted Flat |
| | 3FT x 3FT | D 500 | I 500 | 90 | 3K 3000K | H 347V | FRREG Frosted Regressed |
| | 4FT x 4FT | D 750 | I 750 | | 35K 3500K | | |
| | | D 1000 | I 1000 | | 4K 4000K | | |
| | -Custom Sizes Available - Please Consult Factory | D _____ (custom up to 1200) | I _____ (custom up to 1200) | | 5K 5000K | | |
| DTL L 90 | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |

| Indirect Lens | Finish | Mounting | Driver | Controls |
|--|--|-----------------------------------|---|--|
| FR Frosted BATWING Batwing | WH White BLK Black GRY Grey CU Custom | AC Aircraft Cable 10' Standard | DIMOFF 0-10V DIMOFF <i>Optional</i> DALI LUTRON Philips SR ELDO .1% ELDO (347 only 1-10 5%) | N None <i>Optional</i> DMX SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral |
| <i>Indirect Lens: Minimum size 2FT x 2FT</i> | | | | |
| <input type="text"/> | <input type="text"/> | AC | <input type="text"/> | <input type="text"/> |

| Circuits | Accessories | Wiring | Wire Color | Wire Length | Canopy Color |
|-----------------------------|---|---|---|------------------------------|---|
| 1 1 Circuit 2 2 Circuits | N None <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device | 5 WIRE 5 Wire(std) <i>Optional</i> N 5 Leads 6 WIRE 6 Wire - Cable (EM - emergency battery option) | CL Clear <i>Optional</i> B Black W White | Length(Ft) - 6Ft Standard | WH White BLK Black CU Custom - Consult factory for custom finishes |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |

LED

L90>70,000

Samsung 301 2 McAdam Binning

4000K 120 Lm/W


3500K 98%

3000K 96%


90 CRI 85%

Lens Options - Direct Distribution


Lens Options - Indirect Distribution




Standard
Frosted Flat



Frosted
0.25" Regressed




Standard
Frosted




Batwing

Dimensions

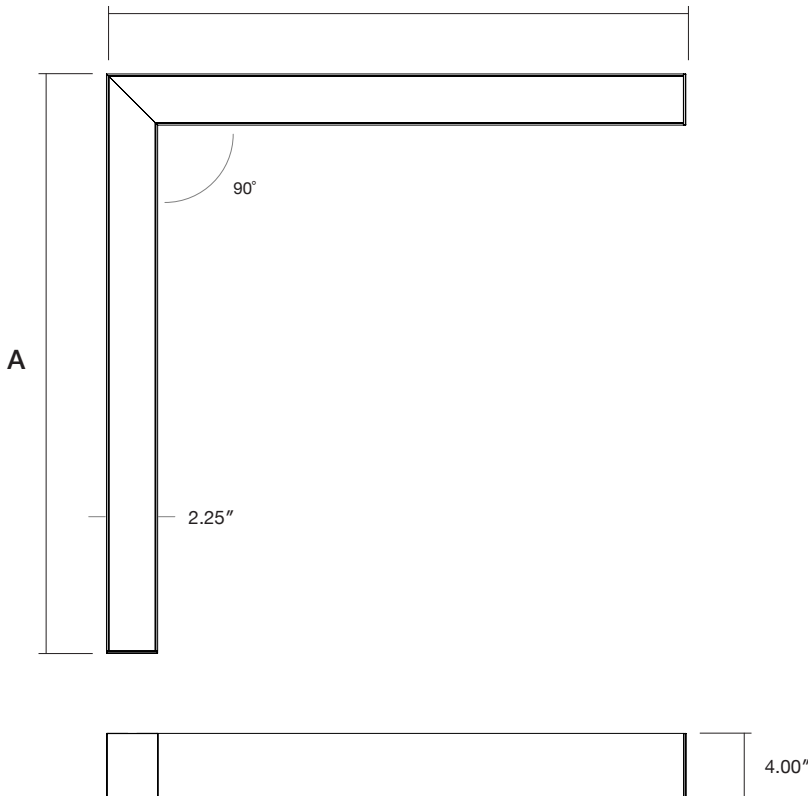

| Model | A | B |
|-----------|-------|-------|
| 2FT x 2FT | 25.5" | 25.5" |
| 3FT x 3FT | 37.5" | 37.5" |
| 4FT x 4FT | 49.5" | 49.5" |

Mounting

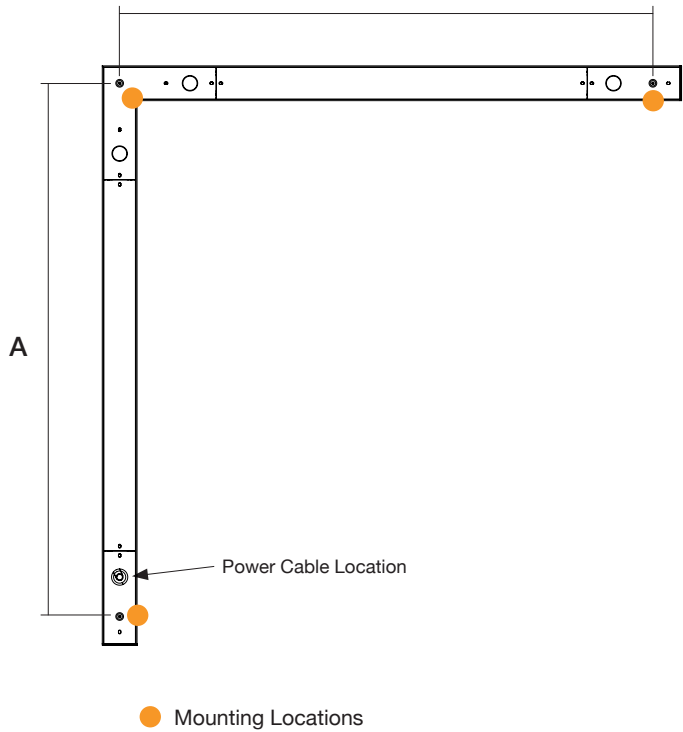

| Model | A | B |
|-----------|--------|--------|
| 2FT x 2FT | 22.50" | 22.50" |
| 3FT x 3FT | 34.50" | 34.50" |
| 4FT x 4FT | 46.50" | 46.50" |

Finish Options

Standard Finishes



Grey
RAL 7046
Sandtex



White
RAL 9003
Sandtex



Black
RAL 9004
Sandtex

Custom Finishes



Orange
RAL 2009
Sandtex



Green
RAL 6010
Sandtex



Blue
RAL 5012
Sandtex



Yellow
RAL 1037
Sandtex

Additional finishes - Please contact factory