

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_

# Thinline U 120/60


## Suspended

**Direct | Direct-Indirect**

Architectural luminaire. 120/60° U Shaped luminaire. Pendant mounting. Direct and direct-indirect distribution options. Available in 2 sizes. 2.25" wide. Multiple finishes available.

cULus Listed

Designed and manufactured in North America.  
5 Year Warranty.

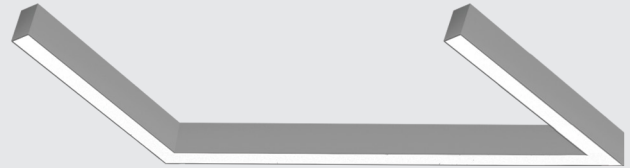

### Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



### Ordering Options

**Sample Configuration:** DTL U 120/60 - 4FT x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

Model	Size	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL U 120/60	4FT x 2FT	<b>D 250</b>	<b>I 250</b>	80	<b>27K</b> 2700K	<b>U</b> 120/277V	<b>FR</b> Frosted Flat
	6FT x 3FT	<b>D 500</b>	<b>I 500</b>	90	<b>3K</b> 3000K	<b>H</b> 347V	<b>FRREG</b> Frosted Regressed
	-Custom Sizes Available - Please Consult Factory	<b>D 750</b>	<b>I 750</b>		<b>35K</b> 3500K		
		<b>D 1000</b>	<b>I 1000</b>		<b>4K</b> 4000K		
		<b>D _____</b>	<b>I _____</b>		<b>5K</b> 5000K		
		(custom up to 1200)	(custom up to 1200)				

<b>DTL U 120/60</b>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
---------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

Indirect Lens	Finish	Mounting	Driver	Controls
<b>FR</b> Frosted	<b>WH</b> White	<b>AC</b> Aircraft Cable	<b>DIMOFF</b> 0-10V DIMOFF	<b>N</b> None
<b>BATWING</b> Batwing	<b>BLK</b> Black	10' Standard	<i>Optional</i>	<i>Optional</i>
	<b>GRY</b> Grey		<b>DALI</b>	<b>DMX</b>
	<b>CU</b> Custom		<b>LUTRON</b> Lutron Ecosystem	<b>SNS</b> Philips SNS 300 w/BLD & Daylight
<i>Indirect Lens: Minimum size 4FT x 2FT</i>	<i>- Contact factory for custom finishes</i>		<b>SR</b> Philips SR	<b>CLM</b> Encelium CLM
			<b>ELDO</b> .1% ELDO (347 only 1-10 5%)	<b>LG</b> LG Dongle
				<b>BT</b> Bluetooth Mesh
				<b>EN</b> Enlighted Integral

<input type="text"/>	<input type="text"/>	<b>AC</b>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	-----------	----------------------	----------------------

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit	<b>N</b> None	<b>5 WIRE</b> 5 Wire(std)	<b>CL</b> Clear	<b>Length(Ft)</b>	<b>WH</b> White
2 2 Circuits	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>	- 6Ft Standard	<b>BLK</b> Black
	<b>10kV</b> 10kV Surge Protection	<b>N</b> 5 Leads	<b>B</b> Black		<b>CU</b> Custom
	<b>EM</b> Emergency Battery	<b>6 WIRE</b> 6 Wire - Cable (EM - emergency battery option)	<b>W</b> White		<i>- Consult factory for custom finishes</i>
	<b>+GTD</b> Generator Transfer Device				

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

**LED**

L90>70,000

Samsung 301 2 McAdam Binning


4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%

**Lens Options - Direct Distribution**




Standard  
Frosted Flat




Frosted  
0.25" Regressed

**Lens Options - Indirect Distribution**




Standard  
Frosted




Batwing

**Dimensions**

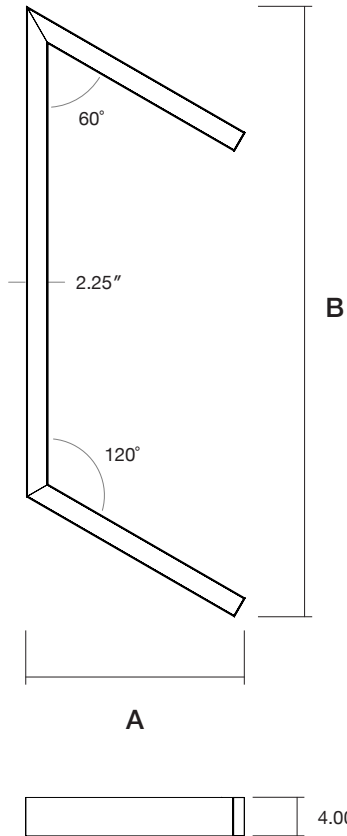

Model	A	B
4FT x 2FT	22.8"	51.1"
6FT x 3FT	33.2"	75.1"

**Mounting**

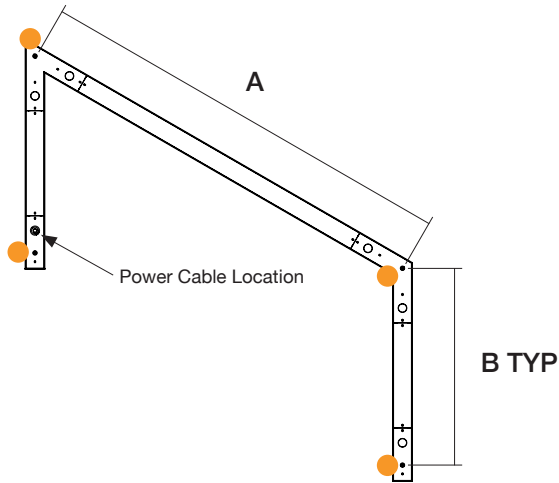

Model	A	B
4FT x 2FT	48.5"	22.5"
6FT x 3FT	72.5"	34.5"

● Mounting Locations

**Finish Options**

**Standard Finishes**



Grey  
RAL 7046  
Sandtex



White  
RAL 9003  
Sandtex



Black  
RAL 9004  
Sandtex

**Custom Finishes**



Orange  
RAL 2009  
Sandtex



Green  
RAL 6010  
Sandtex



Blue  
RAL 5012  
Sandtex



Yellow  
RAL 1037  
Sandtex

Additional finishes - Please contact factory