

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_

# Thinline U 60


## Suspended

**Direct | Direct-Indirect**

Architectural luminaire. 60° U Shaped luminaire. Pendant mounting. Direct and direct-indirect distribution options. Available in 2 sizes. 2.25" wide. Multiple finishes available.

cULus Listed

Designed and manufactured in North America.  
5 Year Warranty.

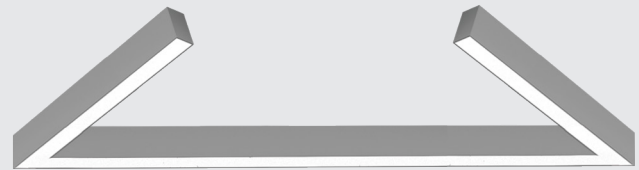

### Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



### Ordering Options

**Sample Configuration:** DTL U 60 - 2FT x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

Model	Size	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL U 60	4FT x 2FT	D 250	I 250	80	27K 2700K	U 120/277V	FR Frosted Flat
		D 500	I 500	90	3K 3000K	H 347V	FRREG Frosted Regressed
	6FT x 3FT	D 750	I 750		35K 3500K		
	-Custom Sizes Available - Please Consult Factory	D 1000	I 1000		4K 4000K		
		D _____	I _____		5K 5000K		
		(custom up to 1200)	(custom up to 1200)				

Indirect Lens	Finish	Mounting	Driver	Controls
FR Frosted	WH White	AC Aircraft Cable	DIMOFF 0-10V DIMOFF	N None
BATWING Batwing	BLK Black	10' Standard	<i>Optional</i>	<i>Optional</i>
<i>Indirect Lens: Minimum size 4FT x 2FT</i>	GRY Grey		DALI	DMX
	CU Custom		LUTRON	SNS Philips SNS 300 w/BLD & Daylight
	- Contact factory for custom finishes		SR	CLM Encelium CLM
			ELDO .1% ELDO (347 only 1-10 5%)	LG LG Dongle
				BT Bluetooth Mesh
				EN Enlighted Integral

<input type="text"/>	<input type="text"/>	AC	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----	----------------------	----------------------

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit	N None	5 WIRE 5 Wire(std)	CL Clear	Length(Ft)	WH White
2 2 Circuits	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>	- 6Ft Standard	BLK Black
	10kV 10kV Surge Protection	N 5 Leads	B Black		CU Custom
	EM Emergency Battery	6 WIRE 6 Wire - Cable (EM - emergency battery option)	W White		- Consult factory for custom finishes
	+GTD Generator Transfer Device				

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

**LED**

L90>70,000

Samsung 301 2 McAdam Binning

4000K 120 Lm/W


3500K 98%

3000K 96%


90 CRI 85%

**Lens Options - Direct Distribution**


**Lens Options - Indirect Distribution**




Standard  
Frosted Flat



Frosted  
0.25" Regressed




Standard  
Frosted




Batwing

**Dimensions**

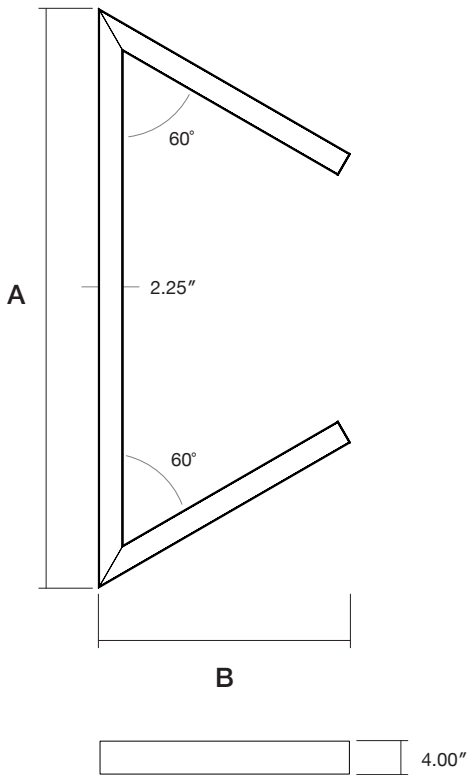

Model	A	B
4FT x 2FT	52.4"	22.8"
6FT x 3FT	76.4"	33.2"

Mounting

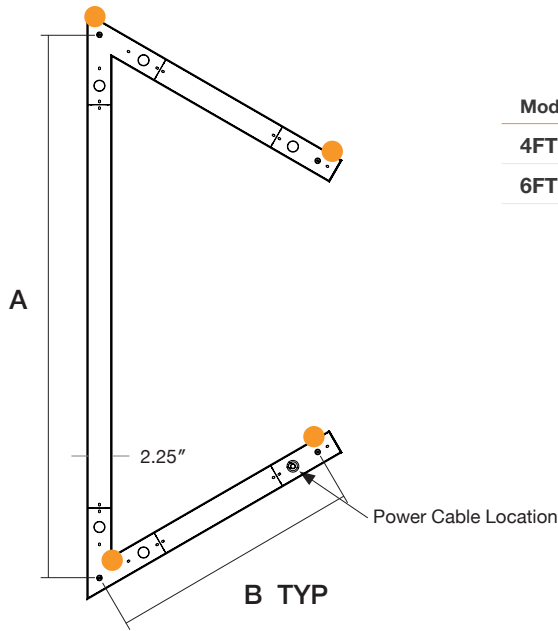

Model	A	B
4FT x 2FT	48.5"	22.5"
6FT x 3FT	72.5"	34.5"

● Mounting Locations

Finish Options

Standard Finishes



Grey  
RAL 7046  
Sandtex



White  
RAL 9003  
Sandtex



Black  
RAL 9004  
Sandtex

Custom Finishes



Orange  
RAL 2009  
Sandtex



Green  
RAL 6010  
Sandtex



Blue  
RAL 5012  
Sandtex



Yellow  
RAL 1037  
Sandtex

Additional finishes - Please contact factory